




MADE IN 
CHINA

中国制造 引领未来

Made in China Leading the Future

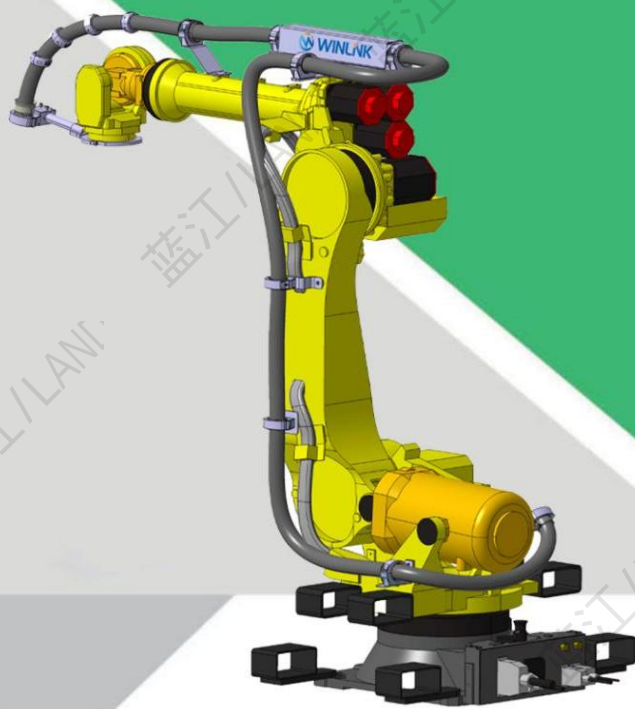

蓝江机器人管线包.2025-A3版

LAND Electronic Manual. 2025-A3 Edition



创新 引领未来

Customer first, service foremost
客户第一，服务至上



公司简介 company Profile

昆山蓝江电气科技有限公司，成立于2010年，地址位于苏州昆山市，我们始终专注于电缆防水接头，软管与管接头，机器人管线包研发与生产，公司严格执行ISO9001质量体系标准，可靠的质量，快速的交期获得广大客户一致认可。

业务介绍 Company business

电缆防水接头系列



软管及管接头系列



机器人管线包系统



昆山蓝江电气科技有限公司

Kunshan Land Electric Technology Co., Ltd


产品页码索引




机器人管线包方案(4-6页)



机器人波纹管(7-13页)

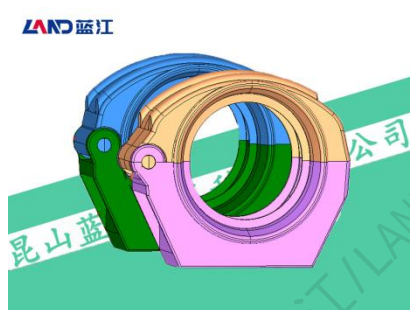

尼龙集成支架(14-18页)

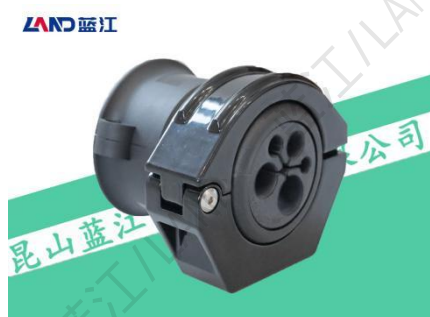


铝制集成支架(19-23页)



协作抱箍支架(24-30页)



协作绑带支架(31-35页)

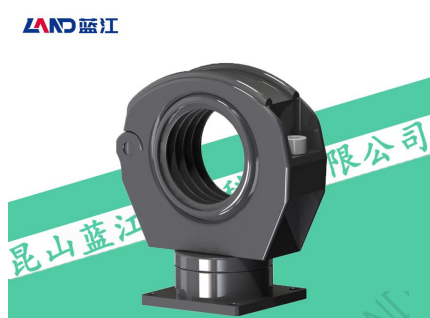


万向旋转支架(36-43页)



管线包尼龙零部件(44-54页)




管线包金属零部件(55-59页)

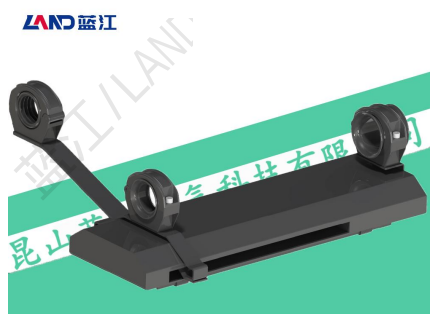

管线包伸缩盒(60-62页)






拖链管线包系列(63-76页)

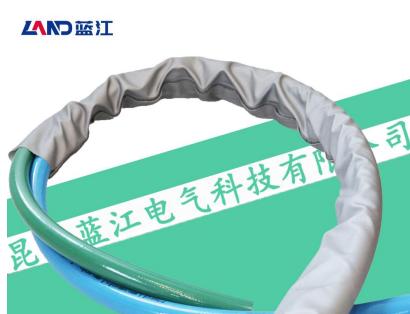

包线布系列(77-80页)



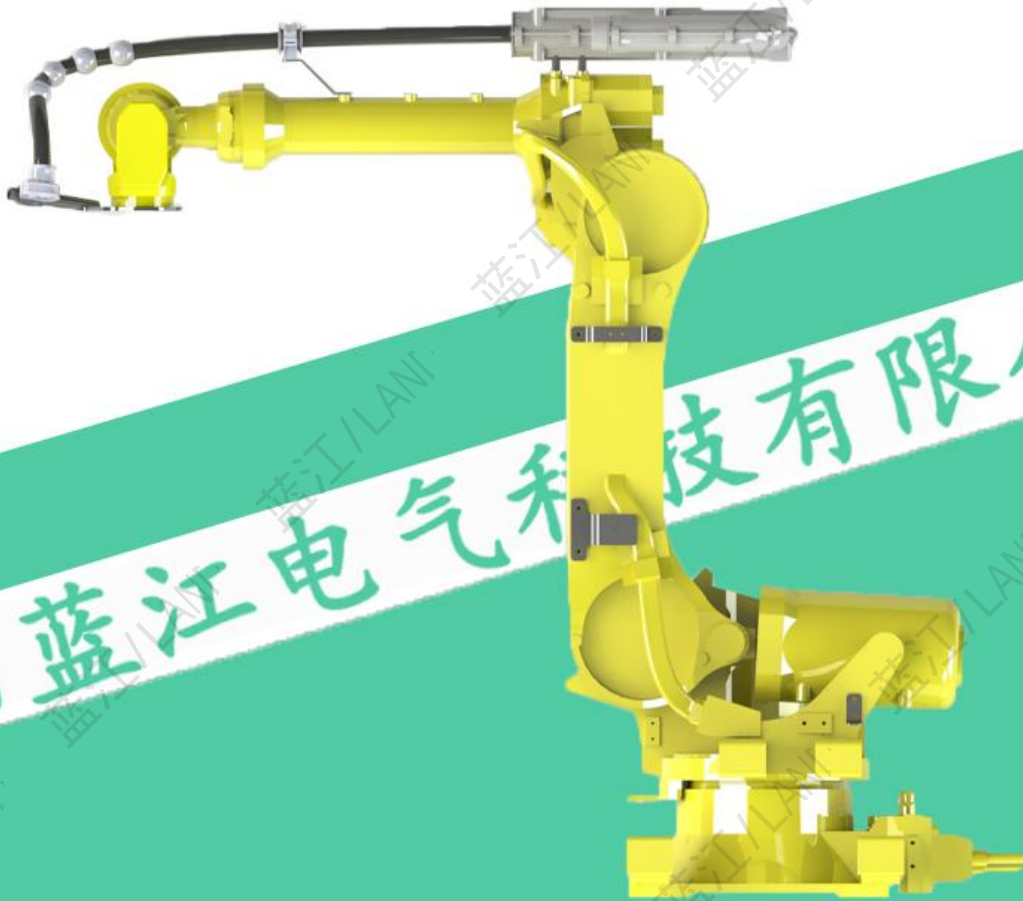

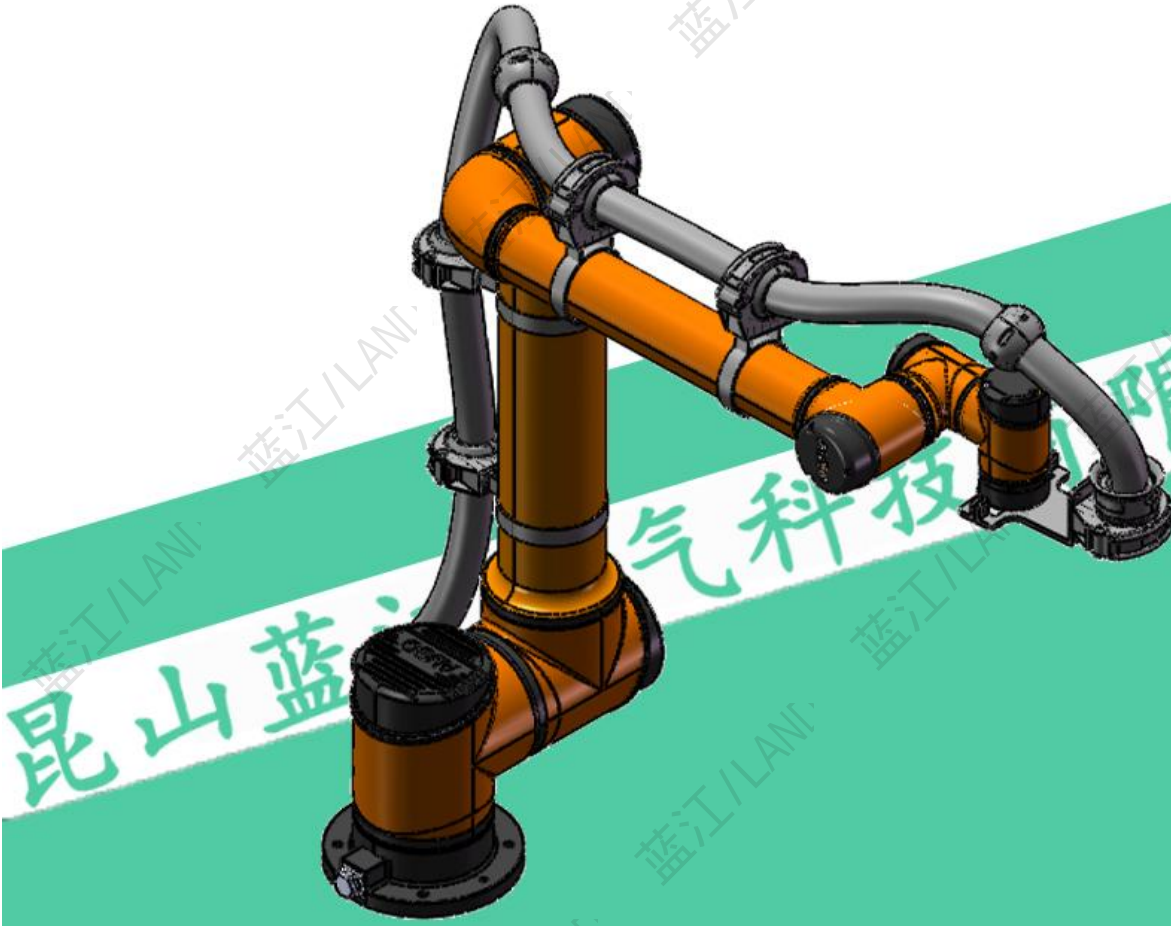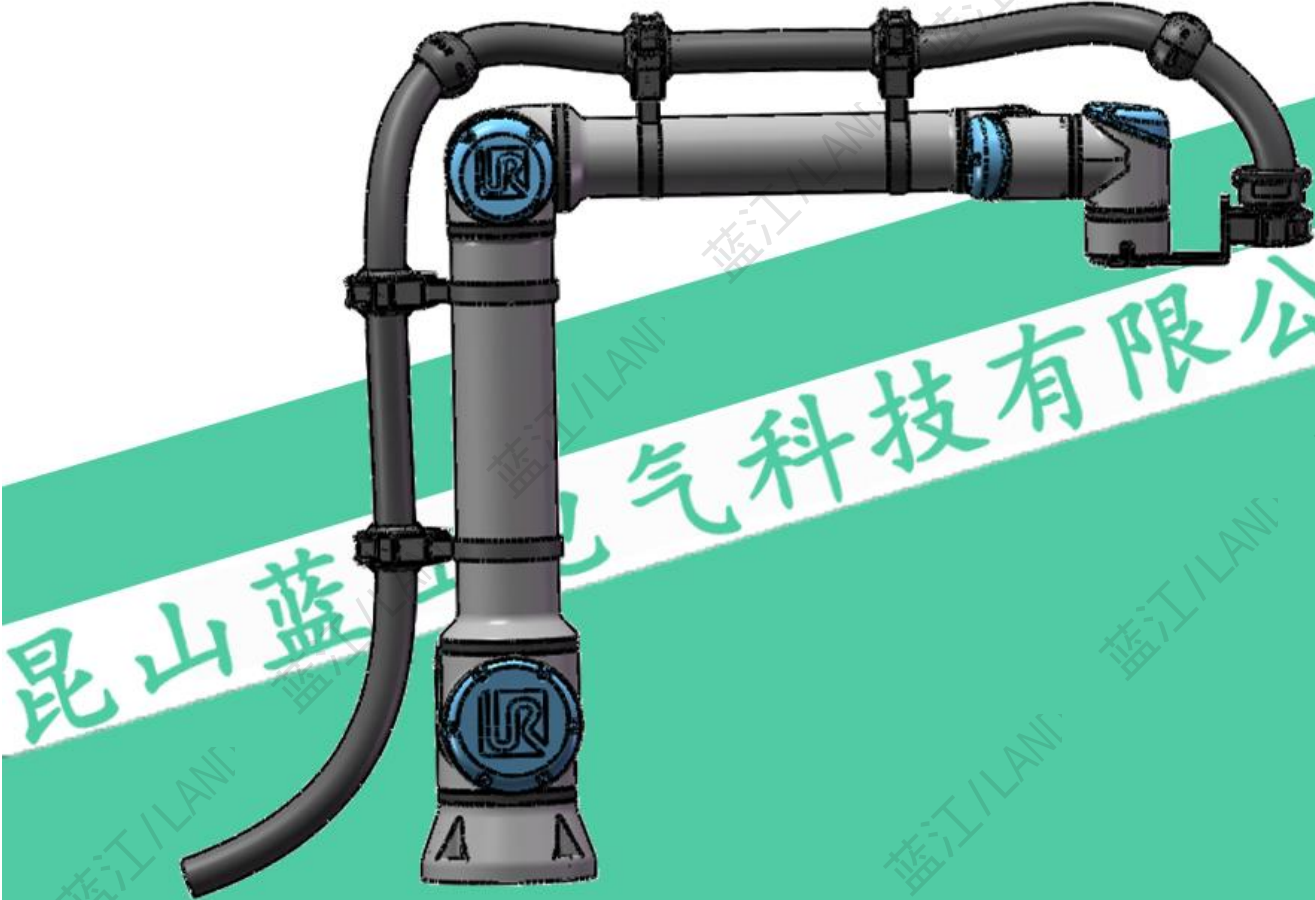



波纹软管管线包系统

随着工业制造2.0时代的到来，全自动化无人生产车间应运而生，在未来的生产作业中，工业机器人与协作机器人将成为生产车间无可替代的“工人”，蓝江WINLINK为应对即将到来的变革，不断加大对管线包的研发，不断推出各型号机器人管线包方案，可根据用户需求定制，满足个性化需求。

波纹软管管线包系统包括：

- ①机器人波纹管（8-13页）
- ②尼龙软管支架（14-18页）
- ③金属软管支架（19-23页）
- ④协作软管支架（24-35页）
- ⑤旋转软管支架（36-43页）
- ⑥管线包零部件（44-59页）
- ⑦管线包伸缩盒（60-62页）

蓝江不断深耕机器人软管及配件的研发，相继推出标准型软管，高柔型软管，细纹型软管，高波型软管，耐磨型软管等，各类固定支架在不同环境下都能稳定有效工作，确保机器人运行稳定

标准柔性机器人软管

Standard flexible robot hose

品牌：蓝江/WINLINK


材料：聚氨酯（PUR）

颜色：黑色、蓝色

认证：CE、ROHS

性能：高回弹性，耐折弯，耐摩擦，耐扭曲

应用：工业机器人，协作机器人

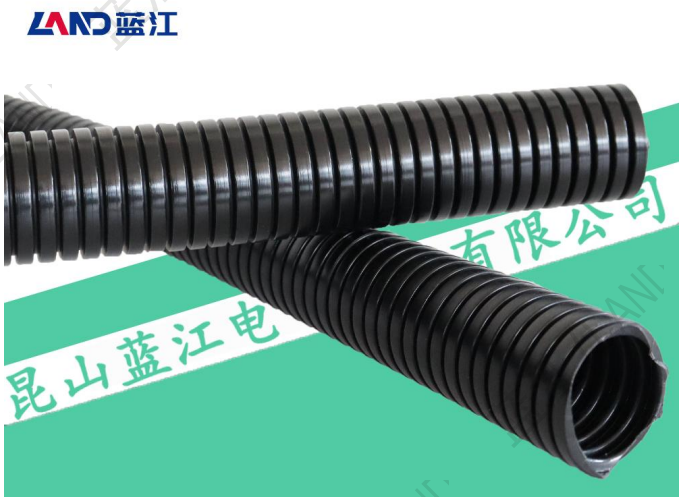

Brand: WINLINK


Material: PUR

Color: Black, Blue

Authentication: CE、ROHS

Performance: High resilience, resistant to bending, friction, and twisting

Applications: Industrial robots, collaborative robots

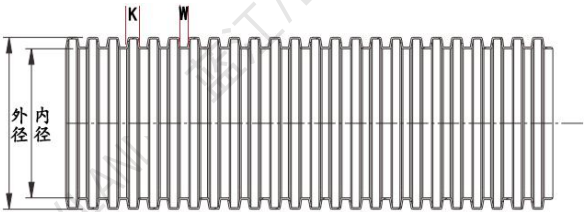

产品选型参数表

蓝江产品型号	内径×外径	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-RG-PUR-17B	17×21.0	3.2	2.2	1	0.6	40	100
WLK-RG-PUR-20B	20×25.0	4.4	3	1.4	0.7	40	50
WLK-RG-PUR-23B	23×28.2	4.4	3	1.4	0.7	45	50
WLK-RG-PUR-28B	28×34.2	6.3	4	2.3	0.8	55	50
WLK-RG-PUR-36B	36×42.3	7	5.2	1.8	0.9	65	30
WLK-RG-PUR-48B	48×54.0	7	5.2	1.8	0.9	80	30
WLK-RG-PUR-56B	56×67.2	7	5	2	1.2	100	30
WLK-RG-PUR-70B	70×80.0	8.5	5.5	3	1.2	120	30
WLK-RG-PUR-95B	95×106	8.5	5.5	3	1.2	150	10

高柔性机器人软管

High flexibility robot hose

品牌：蓝江/WINLINK


材料：改性聚氨酯（PUR）

颜色：黑色、蓝色

认证：CE、ROHS

性能：高柔软性，耐折弯，耐摩擦，耐扭曲

应用：工业机器人，协作机器人

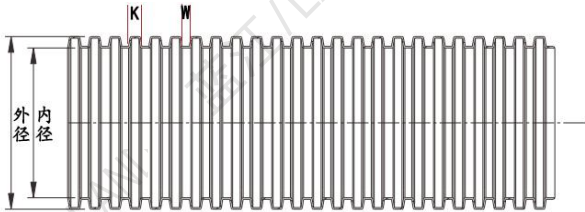

Brand: WINLINK

Material: Modified polyurethane

Color: Black, Blue

Authentication: CE、ROHS

Performance: High flexibility, resistant to bending, friction, and twisting

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	内径×外径	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-RG-PUR-17R	17×21.0	3.2	2.2	1	0.6	30	100
WLK-RG-PUR-20R	20×25.0	4.4	3	1.4	0.7	30	50
WLK-RG-PUR-23R	23×28.2	4.4	3	1.4	0.7	35	50
WLK-RG-PUR-28R	28×34.2	6.3	4	2.3	0.8	45	50
WLK-RG-PUR-36R	36×42.3	7	5.2	1.8	0.9	55	30
WLK-RG-PUR-48R	48×54.0	7	5.2	1.8	0.9	70	30
WLK-RG-PUR-56R	56×67.2	7	5	2	1.2	90	30
WLK-RG-PUR-70R	70×80.0	8.5	5.5	3	1.2	100	30
WLK-RG-PUR-95R	95×106	8.5	5.5	3	1.2	120	10

细纹高柔机器人软管

High flexibility fine tooth robot hose

品牌：蓝江/WINLINK


材料：改性聚氨酯（PUR）

颜色：黑色、蓝色

认证：CE、ROHS

性能：细节距高柔软性，耐折弯，耐摩擦，耐扭曲

应用：工业机器人，协作机器人

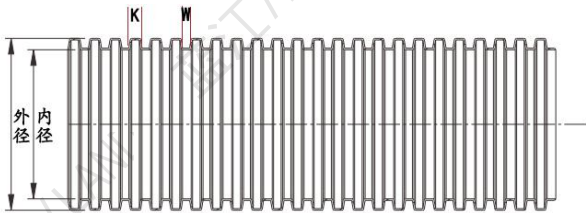

Brand: WINLINK

Material: Modified polyurethane

Color: Black, Blue

Authentication: CE、ROHS

Performance: Detail distance high flexibility, resistant to bending, friction, and distortion

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	内径×外径	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-RG-PUR-23XR	23×28.2	3.3	2.2	1.1	0.7	35	50
WLK-RG-PUR-28XR	28×34.5	4.0	2.5	1.5	0.8	45	50
WLK-RG-PUR-36XR	36×42.3	3.8	2.2	1.6	0.9	50	30
WLK-RG-PUR-48XR	48×54.0	6.0	3.5	2.5	0.9	65	30
WLK-RG-PUR-70XR	70×80.0	6.5	3.3	3.2	1.2	95	30

PA12耐摩机器人软管

PA12 Friction resistant robot hose

品牌：蓝江/WINLINK



材料：改性尼龙12

颜色：黑色、蓝色

认证：CE、ROHS

性能：高耐摩擦，硬度高，耐冲击，耐扭曲

应用：工业机器人，协作机器人

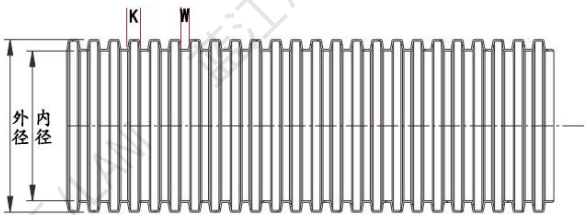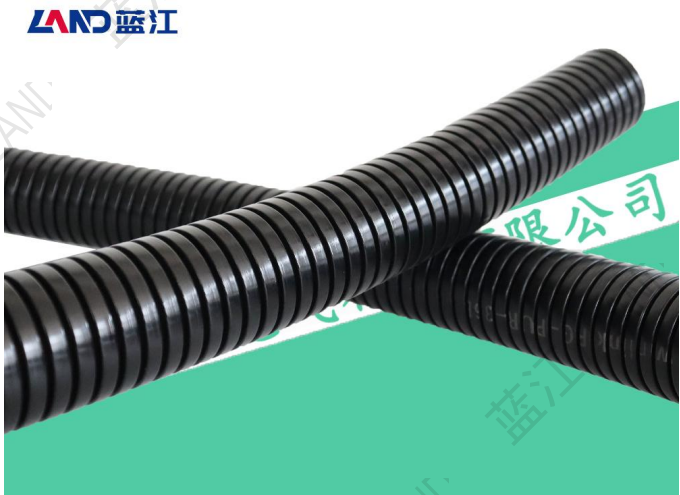

Brand: WINLINK

Material: Modified Nylon 12

Color: Black, Blue

Authentication: CE、ROHS

Performance: High hardness, resistant to friction, impact, and distortion

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	内径×外径	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-PA12-17B	17×21.0	3.2	2.2	1	0.6	50	100
WLK-PA12-20B	20×25.0	4.4	3	1.4	0.7	50	50
WLK-PA12-23B	23×28.2	4.4	3	1.4	0.7	55	50
WLK-PA12-28B	28×34.2	6.3	4	2.3	0.8	65	50
WLK-PA12-36B	36×42.3	7	5.2	1.8	0.9	75	30
WLK-PA12-48B	48×54.0	7	5.2	1.8	0.9	90	30
WLK-PA12-56B	56×67.2	7	5	2	1.2	110	30
WLK-PA12-70B	70×80.0	8.5	5.5	3	1.2	130	30
WLK-PA12-95B	95×106	8.5	5.5	3	1.2	160	10

PA12阻燃机器人软管

PA12 Flame retardant robot hose

品牌：蓝江/WINLINK


材料：改性尼龙12

颜色：黑色、蓝色

认证：CE、ROHS

性能：高耐摩擦，硬度高，阻燃V2级

应用：工业机器人，协作机器人

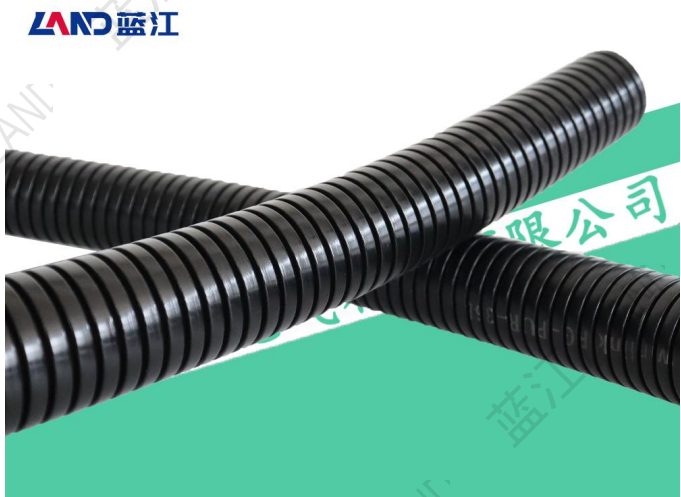

Brand: WINLINK


Material: Modified Nylon 12

Color: Black, Blue

Authentication: CE、ROHS

Performance: High friction resistance, high hardness, flame retardant V2

Applications: Industrial robots, collaborative robots

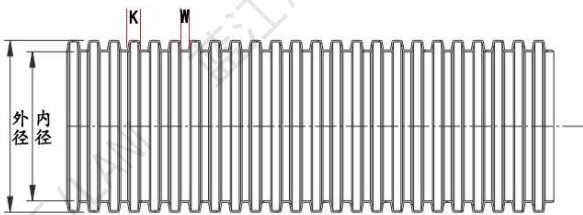

产品选型参数表

蓝江产品型号	内径×外径	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-PA12-17B-V2	17×21.0	3.2	2.2	1	0.6	50	100
WLK-PA12-20B-V2	20×25.0	4.4	3	1.4	0.7	50	50
WLK-PA12-23B-V2	23×28.2	4.4	3	1.4	0.7	55	50
WLK-PA12-28B-V2	28×34.2	6.3	4	2.3	0.8	65	50
WLK-PA12-36B-V2	36×42.3	7	5.2	1.8	0.9	75	30
WLK-PA12-48B-V2	48×54.0	7	5.2	1.8	0.9	90	30
WLK-PA12-56B-V2	56×67.2	7	5	2	1.2	110	30
WLK-PA12-70B-V2	70×80.0	8.5	5.5	3	1.2	130	30
WLK-PA12-95B-V2	95×106	8.5	5.5	3	1.2	160	10

阻燃高波纹软管/V0

Flame retardant High ripple hose/V0

品牌：蓝江/WINLINK

材料：尼龙6/尼龙12

阻燃：UL94V-0

温度：-40° C-105° C

性能：高波结构，耐扭曲，耐摩擦





Brand: WINLINK

Material: Nylon 6/12

Flame retardant: UL94V-0

Temperature:- 40° C-105° C

Performance: High wave structure, resistant to distortion and friction

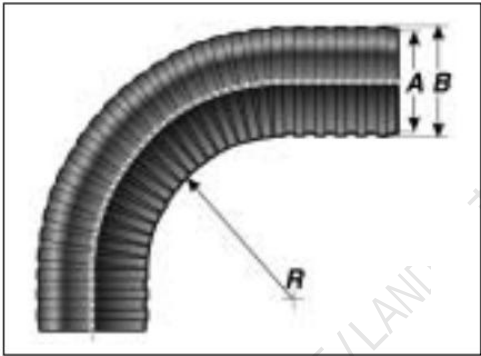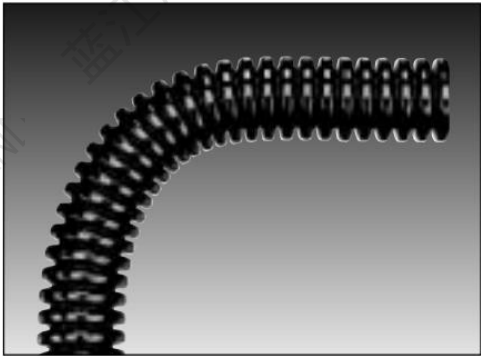

产品选型参数表

蓝江产品型号	内径	外径	弯曲半径	颜色	包装数量
Product model	A	B	R	Color	Packing
PN.	Φ mm	mm	mm	B/G/N	M/ring
WLK-PA6-P21H	19. 81	28. 19	49. 02	Black	50
WLK-PA6-P29H	24. 13	34. 54	56. 89	Black	25
WLK-PA6-P36H	29. 72	42. 16	71. 12	Black	25
WLK-PA6-P48H	38. 10	54. 10	87. 12	Black	25
WLK-PA12-P21H	19. 81	28. 19	49. 02	Black	50
WLK-PA12-P29H	24. 13	34. 54	56. 89	Black	25
WLK-PA12-P36H	29. 72	42. 16	71. 12	Black	25
WLK-PA12-P48H	38. 10	54. 10	87. 12	Black	25

如需开口，请将型号后加“LS”，如WLK-PA12-P48H-LS即为开口型

软管配球固定支架

Hose ball fixing bracket

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：多扣适配器固定软管，可配合机器人摆动

应用：机器人波纹管



Brand: WINLINK


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Multi tooth adapter fixed hose, can cooperate with robot 360 swing

Application: Robot hose

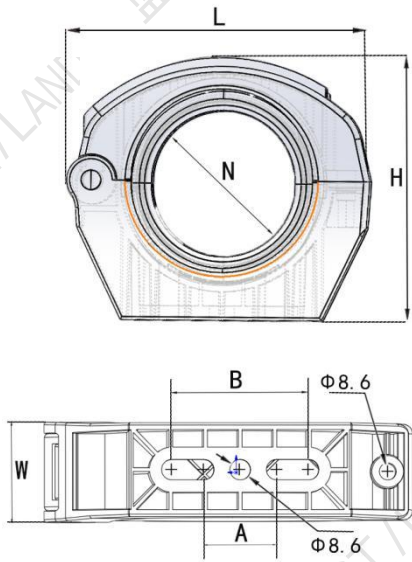

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGHQ-23A	23×28.2	82	34	72	30~33	27	10
WLK-RGHQ-28A	28×34.2	82	34	72	30~33	32	10
WLK-RGHQ-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGHQ-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGHQ-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGHQ-70A	70×80.0	150	38	135	30~56	72	5
WLK-RGHQ-95A	95×106	188	49	170	52/89	97	5

软管定位固定支架

Hose positioning fixing bracket

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：固定软管方向与位置，耐摩擦，抗拉性强

应用：机器人波纹管



Brand: WINLINK


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Fixed hose direction and position, friction resistant, strong tensile strength

Application: Robot hose

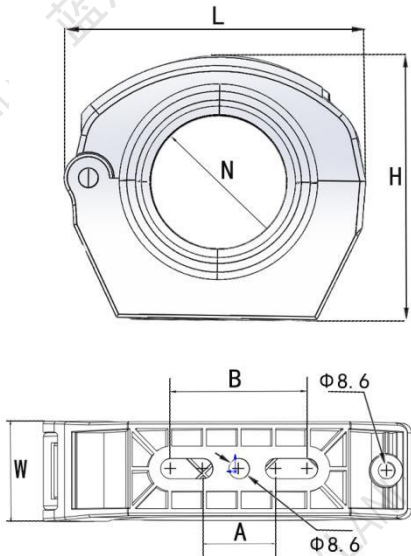

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGQDW-23A	23×28.2	82	34	72	30~33	27	10
WLK-RGQDW-28A	28×34.2	82	34	72	30~33	32	10
WLK-RGQDW-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGQDW-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGQDW-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGQDW-70A	70×80.0	150	38	135	30~56	72	5

软管导向滑动支架

Hose guided sliding bracket

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：双头喇叭口设计，内壁光滑，软管可自由伸缩滑动

应用：机器人拖链管、机器人波纹管



Brand: WINLINK

Material: Modified Nylon



Color: Black

Authentication: CE、ROHS

Performance: Double headed horn mouth design, smooth inner wall, flexible hose can freely expand and slide

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

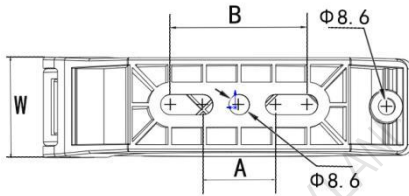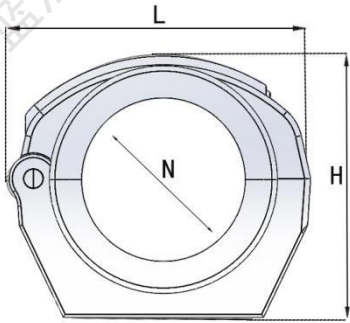

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGZD-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGZD-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGZD-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGZD-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGZD-70A	R70	70×80.0	150	38	135	30~56	88	5

软管前末端套筒支架

Hose front end sleeve bracket

品牌：蓝江/WINLINK


材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：喇叭口端接软管，分线器端出线，用于机器人前末端，耐磨擦，抗拉力强

应用：机器人波纹管

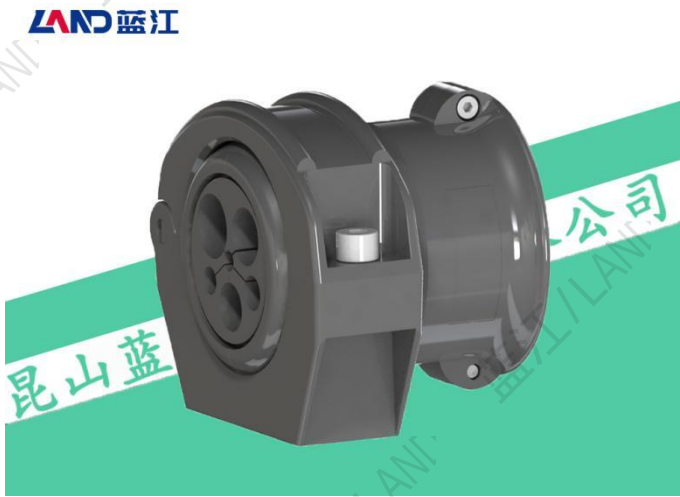

Brand: WINLINK


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance:The horn end is connected to a hose, and the splitter end is used for the front end of the robot.

Adaptation: robot hose

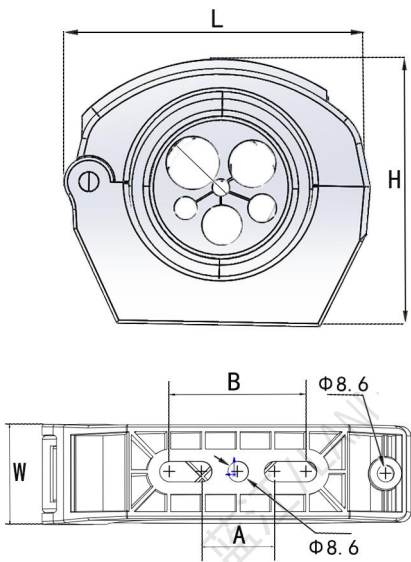

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长.L	厚.W	高.H	孔数N	A~B mm	PCS
WLK-RGQFW-23A	23×28.2	82	34	72	定制	30~33	10
WLK-RGQFW-28A	28×34.2	82	34	72	定制	30~33	10
WLK-RGQFW-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGQFW-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGQFW-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGQFW-70A	70×80.0	150	38	135	13孔	30~56	5

软管前末端配球支架

Hose front end ball bracket

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：用于机器人前端，配合固定软管并出线

应用：机器人波纹管



Brand: WINLINK


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance:Used for robot front-end, in conjunction with fixed hoses and outgoing lines

Adaptation: robot hose

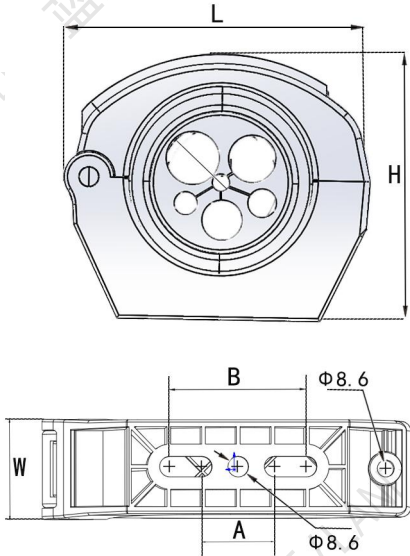

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长. L	厚. W	高. H	孔数N	A~B mm	PCS
WLK-RGQFX-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGQFX-48A	48×54.0	105	33	93	7孔	30~44	10
WLK-RGQFX-56A	56×67.2	150	38	135	10孔	30~56	5
WLK-RGQFX-70A	70×80.0	150	38	135	10孔	30~56	5

铝配球固定支架

Aluminum hose ball fixing bracket

品牌：蓝江/WINLINK


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，工业机器人固定软管，具有强度高，耐腐蚀，轻量化等特点

适配：机器人波纹管

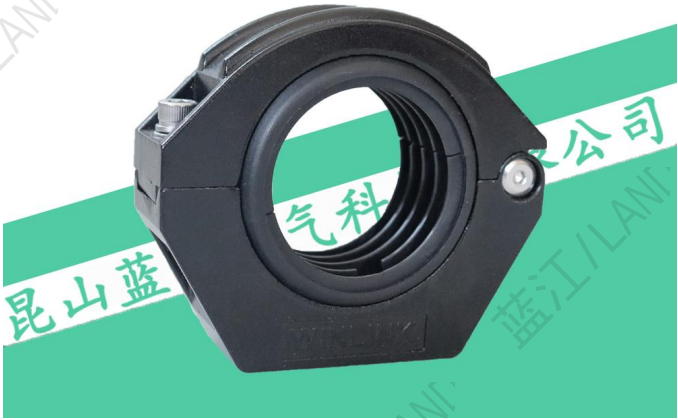

Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum material, fixed robot hose, with high strength, corrosion resistance, lightweight and other characteristics

Adaptation: robot hose

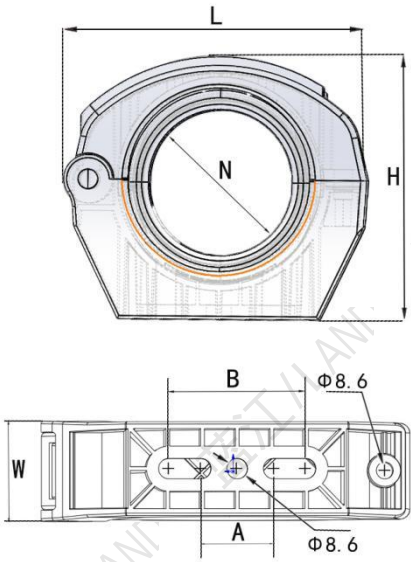

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGQLV-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGQLV-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGQLV-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGQLV-70A	70×80.0	150	38	135	30~56	72	5

铝定位固定支架

Aluminum positioning bracket

品牌：蓝江/WINLINK


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，工业机器人固定软管，具有强度高，耐腐蚀，轻量化等特点

适配：机器人波纹管

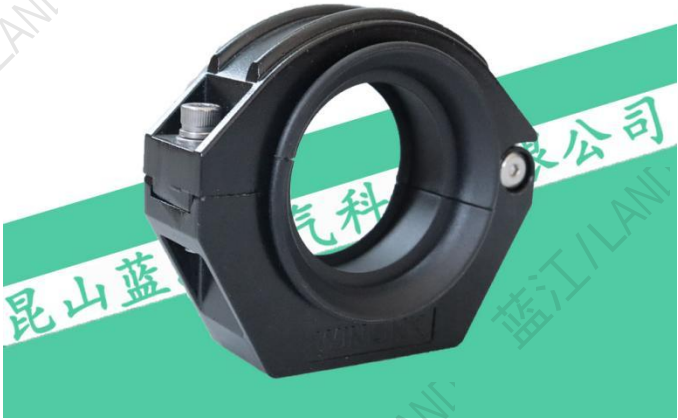

Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum material, fixed robot hose, with high strength, corrosion resistance, lightweight and other characteristics

Adaptation: robot hose

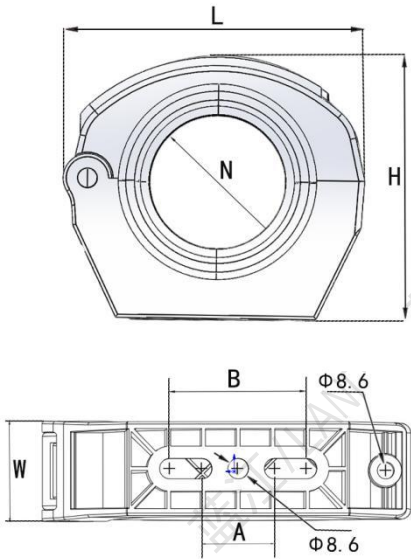

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGWL V-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGWL V-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGWL V-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGWL V-70A	70×80.0	150	38	135	30~56	72	5

铝导向滑动支架

Aluminum guided sliding bracket

品牌：蓝江/WINLINK

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，机器人软管可自由伸缩滑动，具有强度高，耐腐蚀，轻量化等特点

适配：机器人拖链管、机器人波纹管



Brand: WINLINK



Material:Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum material, flexible hose can slide freely, with high strength, corrosion resistance, light weight and other characteristics

Adaptation: Robot drag chain, robot hose

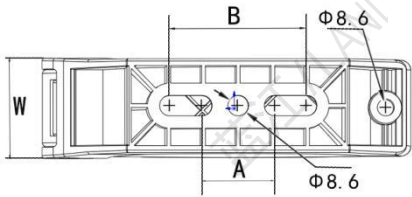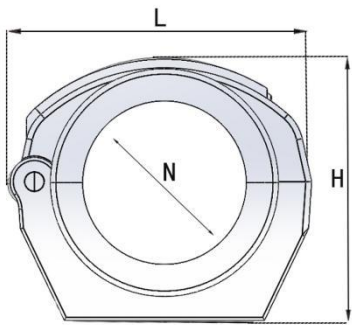

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDLV-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDLV-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDLV-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDLV-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDLV-70A	R70	70×80.0	150	38	135	30~56	88	5

铝前末端套筒固定支架

Aluminum front end bracket

品牌：蓝江/WINLINK

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，固定软管并分线，具有强度高，耐腐蚀，轻量化等特点

适配：机器人波纹管



Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum material, six axis fixed hose, with high strength, corrosion resistance, and lightweight characteristics

Adaptation: robot hose

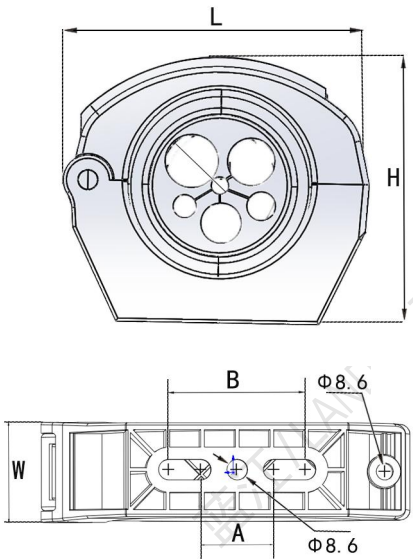

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长.L	厚.W	高.H	孔数N	A~B mm	PCS
WLK-RGFLV-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGFLV-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGFLV-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGFLV-70A	70×80.0	150	38	135	13孔	30~56	5

铝前末端配球支架

Aluminum front end ball bracket

品牌：蓝江/WINLINK

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，固定软管并分线，具有强度高，耐腐蚀，轻量化等特点

适配：机器人波纹管



Brand: WINLINK


Material:Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum material, six axis fixed hose, with high strength, corrosion resistance, and lightweight characteristics

Adaptation: robot hose

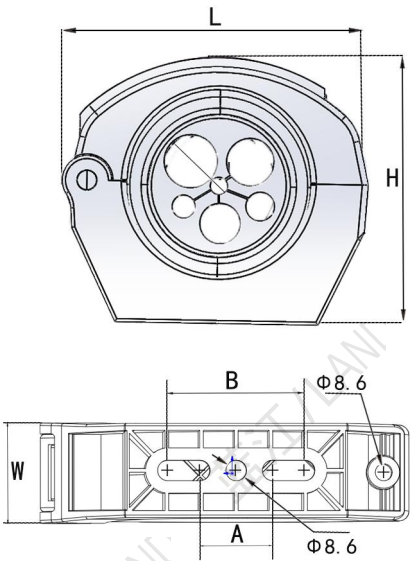

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长. L	厚. W	高. H	孔数N	A~B mm	PCS
WLK-RGXLV-36A	36×42.3	105	33	93	7孔	30~44	10
WLK-RGXLV-48A	48×54.0	105	33	93	7孔	30~44	10
WLK-RGXLV-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGXLV-70A	70×80.0	150	38	135	13孔	30~56	5

协作配球抱箍支架

Collaborative robot ball bracket

品牌：蓝江/WINLINK

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架固定波纹软管

适配：机器人波纹管




Brand: WINLINK

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Lock the robot arm with a clamp
and secure the corrugated hose with a bracket

Adaptation: robot hose

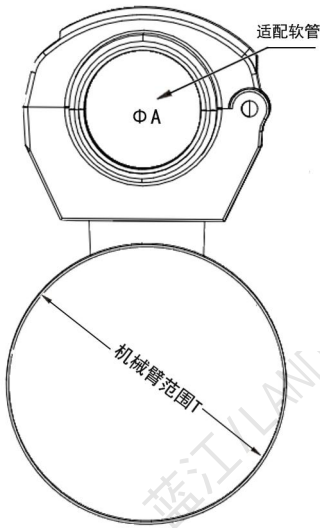

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
WLK-RGCPQ-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPQ-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPQ-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPQ-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPQ-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPQ-70A	70×80.0	5	162-174mm	其它接受定制	

协作滑动导向支架

Collaborative robot sliding bracket

品牌：蓝江/WINLINK

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架内壁光滑，软管可自由伸缩滑动。

适配：机器人拖链，机器人波纹管



Brand: WINLINK

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the mechanical arm with a clamp, the inner wall of the bracket is smooth, and the hose can freely extend and slide.

Adaptation: Robot drag chain, robot hose



产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	AD	Φ A	PCS	T mm		
WLK-RGCPD-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPD-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPD-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPD-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPD-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPD-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作定位固定支架

Collaborative robot fixed bracket

品牌：蓝江/WINLINK

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架固定波纹软管

适配：机器人波纹管




Brand: WINLINK

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Lock the robot arm with a clamp
and secure the corrugated hose with a bracket

Adaptation: robot hose

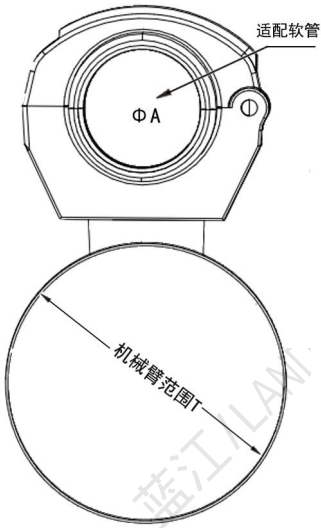

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
WLK-RGCPW-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPW-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPW-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPW-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPW-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPW-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端套筒支架

Collaborative robot front-end sleeve bracket

品牌：蓝江/WINLINK




材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架固定波纹软管并引导出线

适配：机器人波纹管

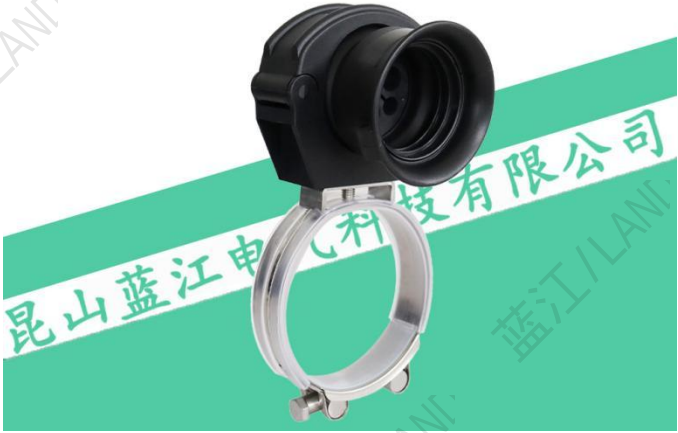


Brand: WINLINK

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the mechanical arm with a clamp, secure the corrugated hose with a bracket, and guide the outgoing line

Adaptation: robot hose

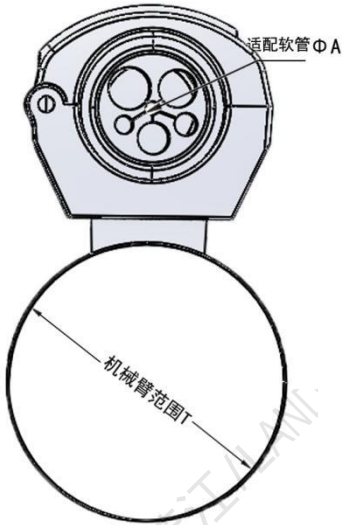

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
WLK-RGCPF-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPF-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPF-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPF-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPF-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPF-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端配球支架

Collaborative robot front-end ball bracket

品牌：蓝江/WINLINK

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架固定波纹软管并引导出线

适配：机器人波纹管




Brand: WINLINK

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the mechanical arm with a clamp, secure the corrugated hose with a bracket, and guide the outgoing line

Adaptation: robot hose

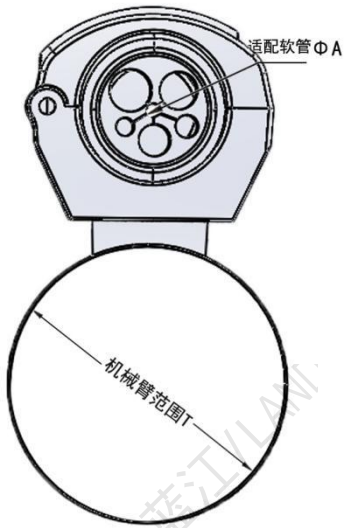

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
WLK-RGCQF-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCQF-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCQF-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCQF-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCQF-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCQF-70A	70×80.0	5	162-174mm	其它接受定制	

协作轻型固定支架

Collaborative lightweight hose bracket

品牌：蓝江/Winlink

材料：尼龙与不锈钢

代码：WLK-RGCPE-A

温度：-40° C~105°

性能：可直接在机器臂上固定波纹管

应用：协作机器人，自动化设备



Brand: WINLINK

Materials: Nylon and Stainless Steel

Code: WLK-RGCPE-A

Temperature: -40 ° C to 105 ° C

Performance: The bellows can be directly fixed on the robotic arm

Application: Collaborative Robots, Automation Equipment

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围			
Winlink model	Adapt hose	Packing	Locking range			
PN.	Φ A	PCS	T mm			
WLK-RGCPE-23A	23×28.5	10	56-59mm	60-63mm	64-67mm	131-139mm
WLK-RGCPE-28A	28×34.2	10	68-73mm	74-79mm	80-85mm	140-148mm
WLK-RGCPE-36A	36×42.3	10	86-91mm	92-97mm	98-103mm	149-161mm
WLK-RGCPE-48A	48×54.0	10	104-112mm	113-121mm	122-130mm	162-174mm

备注：选择产品型号后，需要根据机器人手臂直径选择合适的锁紧范围，具体联系我们的销售经理

协作简易固定支架

Collaborative simple fixed bracket

品牌：蓝江/Winlink

材料：尼龙与不锈钢

代码：WLK-RGCPE-A

温度：-40° C~105°

性能：可直接在机器臂上固定波纹管

应用：协作机器人，自动化设备



Brand: Lanjiang/Winlink

Materials: Nylon and Stainless Steel

Code: WLK-RGCPE-A

Temperature: -40 ° C to 105 ° C

Performance: The bellows can be directly fixed on the robotic arm

Application: Collaborative Robots, Automation Equipment

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围			
Winlink model	Adapt hose	Packing	Locking range			
PN.	Φ A	PCS	T mm			
WLK-RGCPU-28A	28×34.2	10	56-59mm	60-63mm	64-67mm	131-139mm
WLK-RGCPU-36A	36×42.3	10	68-73mm	74-79mm	80-85mm	140-148mm
WLK-RGCPU-48A	48×54.0	10	86-91mm	92-97mm	98-103mm	149-161mm
			104-112mm	113-121mm	122-130mm	162-174mm

备注：选择产品型号后，需要根据机器人手臂直径选择合适的锁紧范围，具体联系我们的销售经理

机器人魔术贴绑带

Robot hose strap

品牌：蓝江/WINLINK

材料：尼龙魔术贴

颜色：黑色，其他定制

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，能有效束紧软管与包线布

适配：机器人波纹管，机器人包线布

Brand: WINLINK

Material: hook and loop

Color: Black, Other Customization

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models, effectively tightening hoses and wrapping fabrics

Adaptation: Robot hose, robot wrapping cloth

LAND 蓝江



LAND 蓝江



产品选型参数表

蓝江产品型号	绑带长度	绑带宽度	单根最大捆扎直径	包装
Product model	Strap length	Strap width	Maximum bundling diameter	Packing
PN.	mm	mm	mm	PCS
WLK-RGPB-L500	500	25	136≥ ϕ	10
WLK-RGPB-L600	600	25	168≥ ϕ	10
WLK-RGPB-L700	700	25	200≥ ϕ	10
WLK-RGPB-L800	800	25	230≥ ϕ	10

协作绑带软管固定座

Collaborative strap hose fixing seat

品牌：蓝江/WINLINK

材料：尼龙魔术贴与改性橡胶

颜色：黑色，灰色

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，橡胶块防滑设计，能有效束紧软管

适配：机器人波纹管

Brand: WINLINK

Material: Nylon Velcro and Modified Rubber

Color: Black, Other Customization

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip can effectively tighten the hose

Adaptation: Robot hose



产品选型参数表

适配软管	蓝江产品型号				
	WLK-RGPB-L400	WLK-RGCPB-L500	WLK-RGCPB-L600	WLK-RGCPB-L700	WLK-RGCPB-L800
Product model	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
φ 17*21.0	≤68	≤98	≤130	≤162	≤193
φ 20*25.0	≤68	≤98	≤130	≤162	≤193
φ 23*28.2	≤68	≤98	≤130	≤162	≤193
φ 28*34.2	≤65	≤95	≤128	≤160	≤191
φ 36*42.3	≤55	≤85	≤116	≤148	≤180
φ 48*54.0	≤50	≤80	≤112	≤145	≤175
φ 56*67.2	≤35	≤65	≤96	≤128	≤160
φ 70*80.0	≤20	≤50	≤80	≤110	≤145

协作绑带定位支架

Collaborative strap positioning bracket

品牌：蓝江/WINLINK

材料：尼龙魔术贴与改性橡胶

颜色：黑色

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，橡胶块防滑设计配合定位环，能有效束紧软管

适配：机器人波纹管



Brand: WINLINK

Material: Nylon Velcro and Modified Nylon

Color: Black

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip design, combined with a positioning ring, can effectively tighten hoses

Adaptation: Robot hose

产品选型参数表

蓝江产品型号	绑带锁紧范围				
Product model	L400	L500	L600	L700	L800
PN.	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
WLK-RGCPK-36-L	≤20	≤50	≤82	≤114	≤146
WLK-RGCPK-48-L	≤20	≤50	≤82	≤114	≤146

协作绑带滑动支架

Collaborative strap sliding bracket

品牌：蓝江/WINLINK

材料：尼龙魔术贴与改性尼龙

颜色：黑色

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，橡胶块防滑设计配合导向套筒，可使软管能够自由伸缩

适配：机器人拖链，机器人波纹管



Brand: WINLINK

Material: Nylon Velcro and Modified Nylon

Color: Black

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip design, combined with the guide sleeve, allows the hose to freely expand and contract

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	绑带锁紧范围				
	L400	L500	L600	L700	L800
Product model	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
WLK-RGCPH-36-L	≤20	≤50	≤82	≤114	≤146
WLK-RGCPH-48-L	≤20	≤50	≤82	≤114	≤146

协作绑带配球固定座

Binding hose fixing bracket

品牌：蓝江/WINLINK

材料：尼龙魔术贴与改性尼龙

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，配合支架可有效锁紧软管

适配：机器人拖链，机器人波纹管



Brand: WINLINK

Material: Nylon Velcro and Modified Nylon

Performance: Wide tightening range, compatible with various collaborative robot models, and the bracket can effectively lock the hose

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配软管	束紧范围	绑带长度	包装
Product model	Adapt hose	Locking range	Strap length	Packing
PN.	AD	mm	mm	PCS
WLK-RGCPQ-23A-L500	23×28.2	≤98	500	10
WLK-RGCPQ-28A-L500	28×34.2	≤95	500	10
WLK-RGCPQ-36A-L500	36×42.3	≤85	500	10
WLK-RGCPQ-48A-L500	48×54.0	≤80	500	10
WLK-RGCPQ-23A-L600	23×28.2	≤130	600	10
WLK-RGCPQ-28A-L600	28×34.2	≤128	600	10
WLK-RGCPQ-36A-L600	36×42.3	≤116	600	10
WLK-RGCPQ-48A-L600	48×54.0	≤112	600	10
WLK-RGCPQ-23A-L700	23×28.2	≤162	700	10
WLK-RGCPQ-28A-L700	28×34.2	≤160	700	10
WLK-RGCPQ-36A-L700	36×42.3	≤148	700	10
WLK-RGCPQ-48A-L700	48×54.0	≤145	700	10
WLK-RGCPQ-23A-L800	23×28.2	≤193	800	10
WLK-RGCPQ-28A-L800	28×34.2	≤191	800	10
WLK-RGCPQ-36A-L800	36×42.3	≤180	800	10
WLK-RGCPQ-48A-L800	48×54.0	≤175	800	10

旋转配球固定支架

Rotating ball hose bracket

品牌：蓝江/WINLINK

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝万向旋转盘为底座，连接配球固定座
支架，可以实现跟随机器人万向旋转

适配：机器人波纹管

Brand: WINLINK



Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance:Using an aluminum universal rotating
disc as the base and connecting it to a ball mounting
bracket, it can achieve universal rotation following
the robot

Adaptation: robot hose

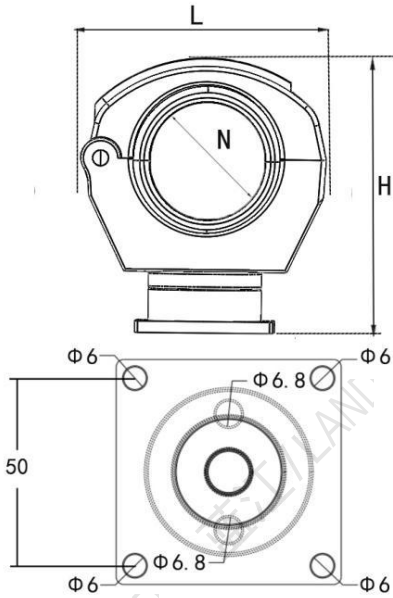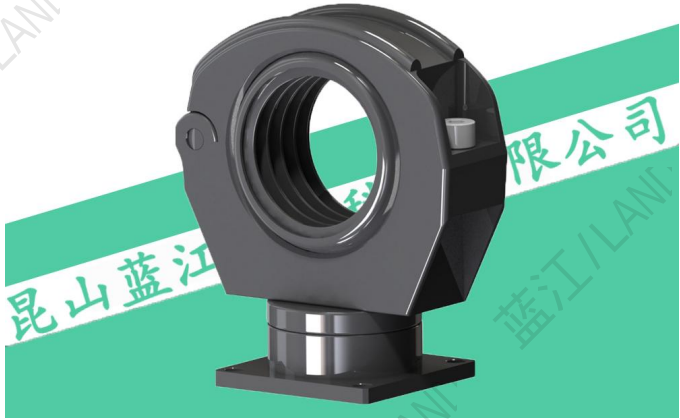

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底盘孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	厚.W	高.H	mm	内径.N	PCS
WLK-RGQMX-23A	23×28.2	82	34	99	50	27	10
WLK-RGQMX-28A	28×34.2	82	34	99	50	32	10
WLK-RGQMX-36A	36×42.3	105	33	120	50	37	10
WLK-RGQMX-48A	48×54.0	105	33	120	50	48.5	10
WLK-RGQMX-56A	56×67.2	150	38	162	50	63	5
WLK-RGQMX-70A	70×80.0	150	38	162	50	72	5

旋转滑动导向支架

Rotating sliding hose bracket

品牌：蓝江/WINLINK


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接导向固定座支架，内壁光滑，可以实现跟随机器人万向旋转

适配：机器人拖链管、机器人波纹管

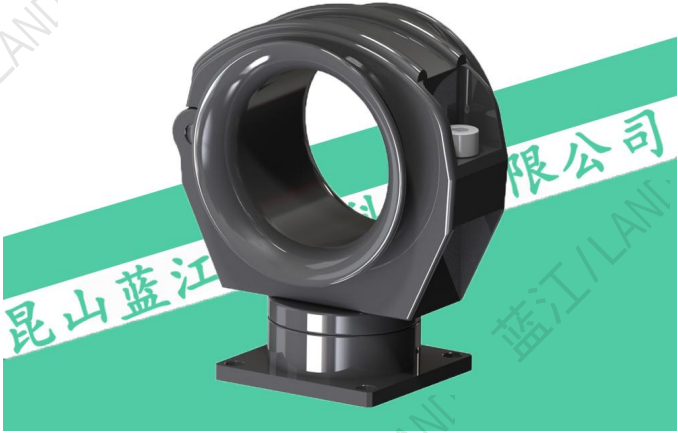

Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot hoses and drag chains, the inner wall is smooth and can follow the movement of the robot to expand and rotate

Adaptation: Robot drag chain, robot hose

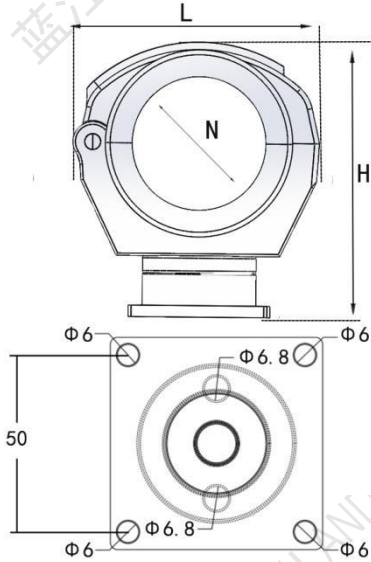

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDMX-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDMX-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDMX-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDMX-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDMX-70A	R70	70×80.0	150	38	135	30~56	88	5

旋转定位固定支架

Rotating positioning fixed bracket

品牌：蓝江/WINLINK


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接定位固定座支架，固定软管，可以实现跟随机器人万向旋转

适配：机器人波纹管

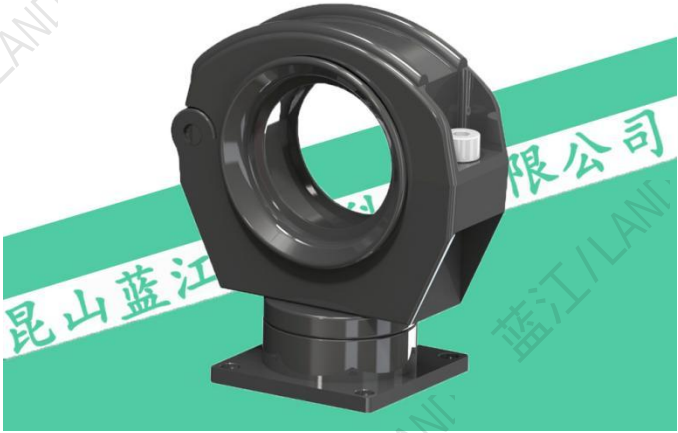

Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot hoses and drag chains, the hoses are fixed and can expand and rotate with the movement of the robot

Adaptation: Robot drag chain, robot hose

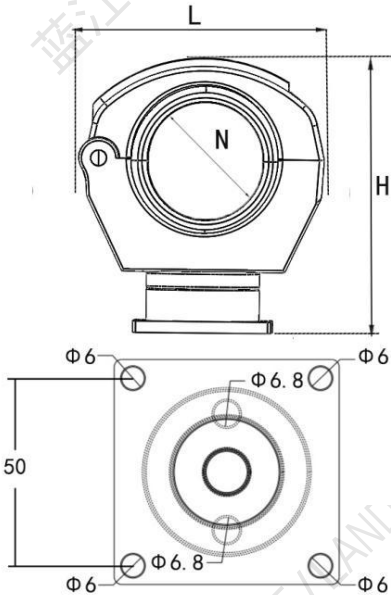

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGWMX-28A	R30	28×34.2	82	34	72	30~33	32	10
WLK-RGWMX-36A	R38	36×42.3	105	33	93	30~44	37	10
WLK-RGWMX-48A	R48	48×54.0	105	33	93	30~44	48.5	10
WLK-RGWMX-56A	R57	56×67.2	150	38	135	30~56	63	5
WLK-RGWMX-70A	R70	70×80.0	150	38	135	30~56	72	5

旋转前末端套筒支架

Rotating front end hose bracket

品牌：蓝江/WINLINK


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接前末端固定座支架，可以实现跟随机器人万向旋转

适配：机器人波纹管

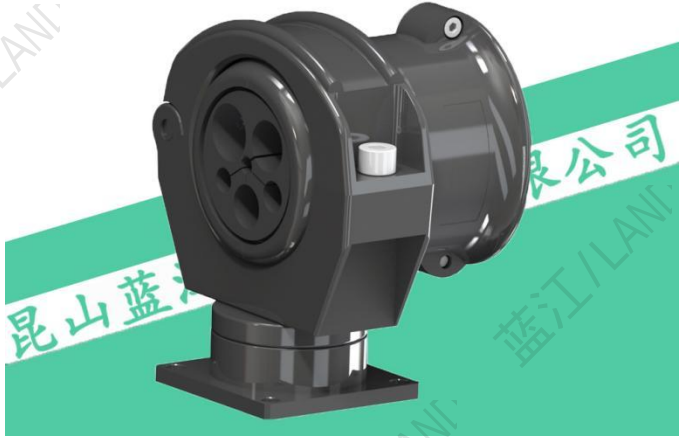

Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot hoses, fixed hose lines that can expand and rotate with the movement of the robot

Adaptation: robot hose

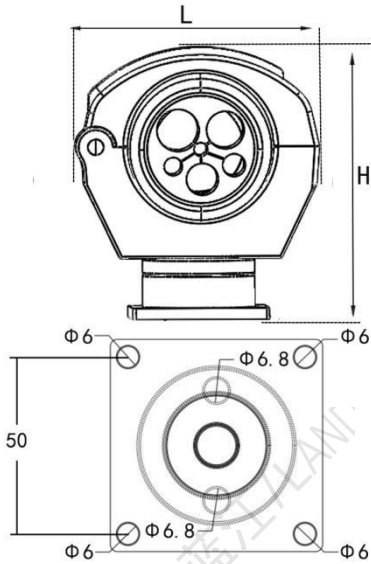

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底盘孔距	孔数	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	holes	Packing
PN.	AD	长.L	厚.W	高.H	A~B mm	N	PCS
WLK-RGFMX-23A	23×28.2	82	34	99	50	定制	10
WLK-RGFMX-28A	28×34.2	82	34	99	50	定制	10
WLK-RGFMX-36A	36×42.3	105	33	120	50	6孔	10
WLK-RGFMX-48A	48×54.0	105	33	120	50	6孔	10
WLK-RGFMX-56A	56×67.2	150	38	162	50	13孔	5
WLK-RGFMX-70A	70×80.0	150	38	162	50	13孔	5

旋转前末端配球支架

Rotating front end ball bracket

品牌：蓝江/WINLINK


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接分线前末端固定座支架，可以实现跟随机器人万向旋转

适配：机器人波纹管

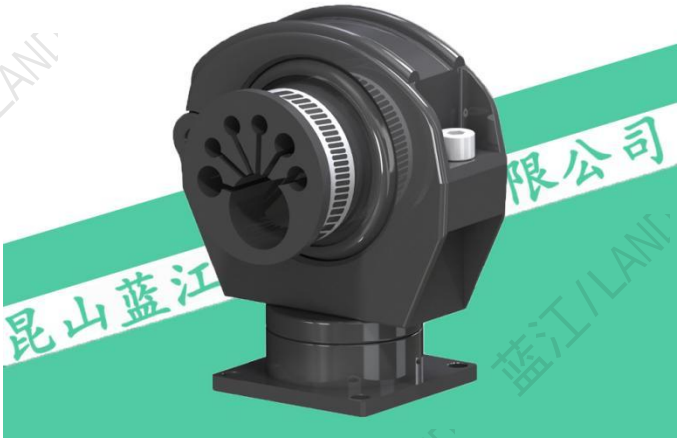

Brand: WINLINK


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Six axis robot hose, fixed outlet, can rotate with the robot's movement

Adaptation: robot hose

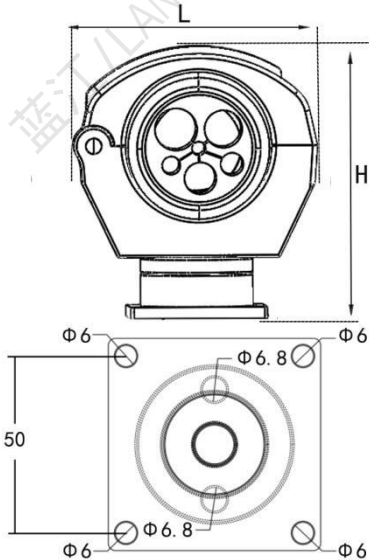

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底盘孔距	孔数	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	holes	Packing
PN.	AD	长.L	厚.W	高.H	A~B mm	N	PCS
WLK-RGEMX-23A	23×28.2	82	34	99	50	定制	10
WLK-RGEMX-28A	28×34.2	82	34	99	50	定制	10
WLK-RGEMX-36A	36×42.3	105	33	120	50	7孔	10
WLK-RGEMX-48A	48×54.0	105	33	120	50	7孔	10
WLK-RGEMX-56A	56×67.2	150	38	162	50	13孔	5
WLK-RGEMX-70A	70×80.0	150	38	162	50	13孔	5

尼龙盘万向旋转配球支架

Nylon disc universal rotating ball bracket

品牌：蓝江/Winlink


材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：以尼龙万向旋转盘为底座，连接配球固定座支架，可以实现跟随机器人万向旋转

适配：机器人波纹管

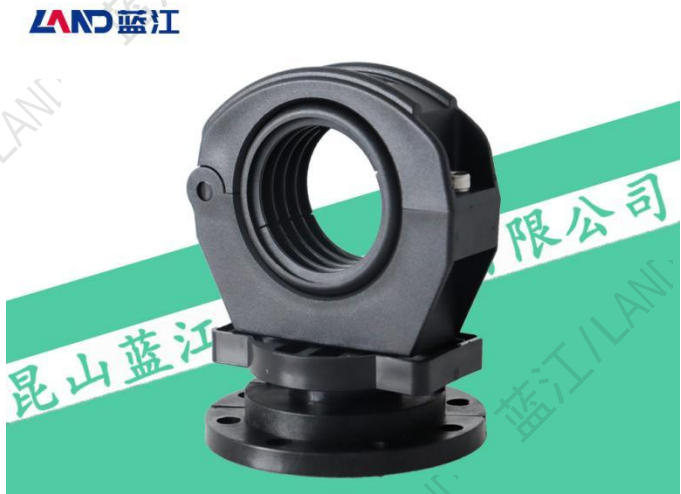

Brand: Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance:Using a Nylon universal rotating disc as the base and connecting it to a ball mounting bracket, it can achieve universal rotation following the robot

Adaptation: robot hose

产品选型参数表

蓝江产品型号	适配软管	底盘安装孔距	底盘安装孔径	包装
Product model	Adapt hose	size(±0.5)	Holes size	Packing
PN.	AD	mm	内径.N	PCS
WLK-RGQOX-23A	23×28.2	83	9mm/ (M8)	1
WLK-RGQOX-28A	28×34.2	83	9mm/ (M8)	1
WLK-RGQOX-36A	36×42.3	83	9mm/ (M8)	1
WLK-RGQOX-48A	48×54.0	83	9mm/ (M8)	1
WLK-RGQOX-56A	56×67.2	83	9mm/ (M8)	1
WLK-RGQOX-70A	70×80.0	83	9mm/ (M8)	1

尼龙盘万向旋转滑动支架

Nylon disc universal rotating sliding bracket

品牌：蓝江/Winlink


材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：以尼龙万向旋转盘为底座，连接导向固定座支架, 内壁光滑, 可以实现跟随机器人万向旋转

适配：机器人拖链管、机器人波纹管

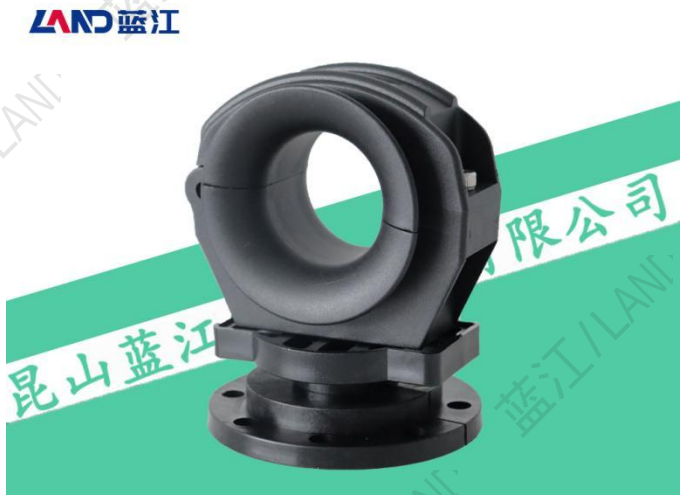

Brand: Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot hoses and drag chains, the inner wall is smooth and can follow the movement of the robot to expand and rotate

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配软管	底盘安装孔距	底盘安装孔径	包装
Product model	Adapt hose	size(±0.5)	Holes size	Packing
PN.	AD	mm	内径.N	PCS
WLK-RGDOX-36A	36×42.3	83	9mm/ (M8)	1
WLK-RGDOX-48A	48×54.0	83	9mm/ (M8)	1
WLK-RGDOX-56A	56×67.2	83	9mm/ (M8)	1
WLK-RGDOX-70A	70×80.0	83	9mm/ (M8)	1

尼龙盘万向旋转前端支架

Nylon disc universal rotating front bracket

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：以尼龙万向旋转盘为底座，连接分线前末端固定座支架，可以实现跟随机器人万向旋转

适配：机器人波纹管



Brand: Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Six axis robot hose, fixed outlet, can rotate with the robot's movement

Adaptation: robot hose

产品选型参数表

蓝江产品型号	适配软管	底盘安装孔距	底盘安装孔径	包装
Product model	Adapt hose	size(±0.5)	Holes size	Packing
PN.	AD	mm	内径. N	PCS
WLK-RGEOX-36A	36×42.3	83	9mm/ (M8)	1
WLK-RGEOX-48A	48×54.0	83	9mm/ (M8)	1
WLK-RGEOX-56A	56×67.2	83	9mm/ (M8)	1
WLK-RGEOX-70A	70×80.0	83	9mm/ (M8)	1

单尼龙固定支架

Single nylon fixed bracket

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE，ROHS

性能：通配WINLINK管线包零部件产品

应用：工业机器人



Brand: WINLINK

Material: Modified Nylon



Color: Black

Authentication: CE、ROHS

Performance: Tongpai Weilianke Pipeline Package

Parts Products

Applications: Industrial robots

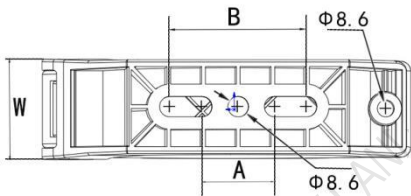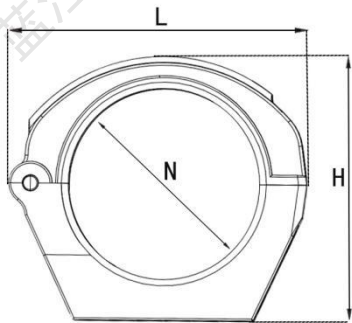

产品选型参数表

蓝江产品型号	适配内夹	支架本体尺寸			底座孔距	内径	包装
Product model	Adapt clamp	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	M	长.L	厚.W	高.H	A~B mm	N mm	PCS
WLK-RGQM-23/28A	R23/28	82	34	72	30~33	45	10
WLK-RGQM-36/48A	R36/48	105	33	93	30~44	65	10
WLK-RGQM-56/70A	R56/70	150	38	135	30~56	99	5
WLK-RGQM-95A	R95	188	49	170	52/89	120	5

单铝制固定支架

Single aluminum fixed bracket

品牌：蓝江/WINLINK


材料：铝制

颜色：黑色

性能：6061铝一体冲压而成，耐腐蚀，轻量化

通配WINLINK管线包零部件产品

应用：工业机器人

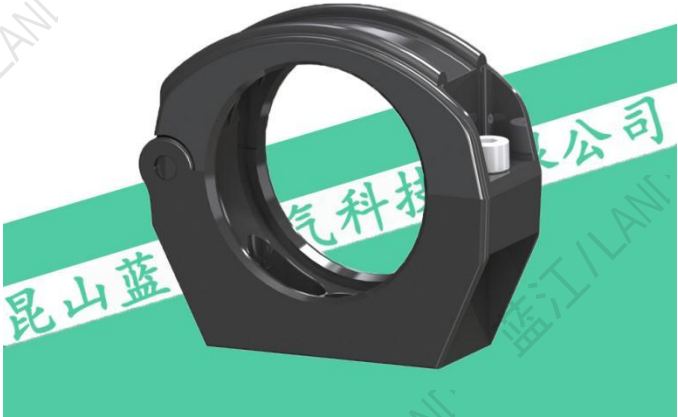



Brand: WINLINK

Material: aluminium

Color: Black

Performance: 6061 aluminum one-piece stamping, corrosion-resistant, lightweight, compatible with WINLINK pipeline package parts products

Applications: Industrial robots

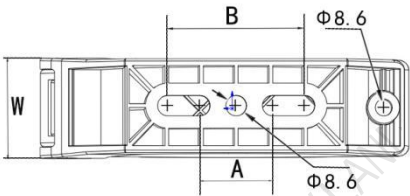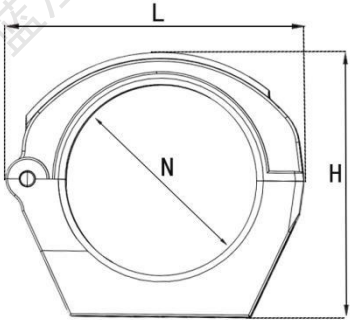

产品选型参数表

蓝江产品型号	适配内夹	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt clamp	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	A	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGLV-36/48A	R36/48	105	31	93	30~44	65	10
WLK-RGLV-56/70A	R56/70	150	38	135	30~56	99	5

波纹管摩擦球

Bellows friction ball

品牌：蓝江/WINLINK

材料：改性尼龙

认证：符合CE和ROHS

颜色：黑色

性能：耐摩擦与撞击，钢性强，耐腐蚀性好

适配：机器人波纹管



Brand: WINLINK



Material: Modified Nylon

Authentication: CE、ROHS

Color: Black

Performance:Resistant to friction and impact,
strong rigidity, and good corrosion resistance

Adaptation: robot hose

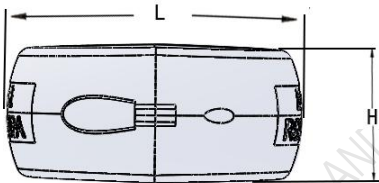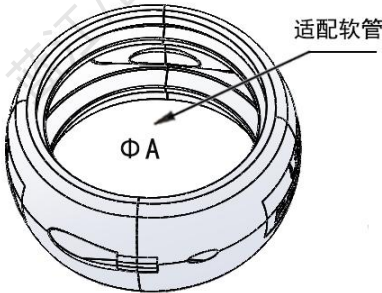

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	ΦA	长.L	高.H	N mm	PCS
WLK-RGQ-23A	23×28.2	53	35	27	50
WLK-RGQ-28A	28×34.2	53	35	32	50
WLK-RGQ-36A	36×42.3	70	47	37	20
WLK-RGQ-48A	48×54.0	70	36	48.5	20
WLK-RGQ-56A	56×67.2	103	47	63	5
WLK-RGQ-70A	70×80.0	103	47	72	5
WLK-RGQ-95A	95×106.0	126	66	97	1

定位环内夹

Hose fixing ring

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，固定软管

适配：机器人波纹管



Brand: WINLINK



Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets to secure hoses

Adaptation: robot hose

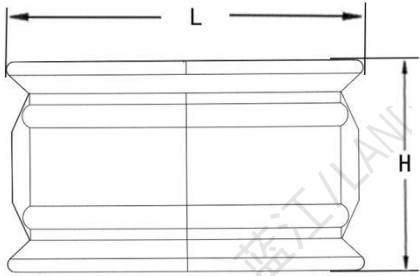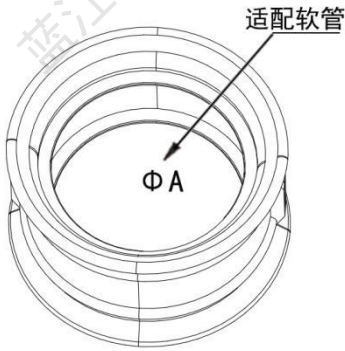

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGDW-36A	36×42.3	71	42	37	20
WLK-RGDW-48A	48×54.0	71	42	48.5	20
WLK-RGDW-56A	56×67.2	104	44	63	10
WLK-RGDW-70A	70×80.0	104	44	72	10

滑动导向套筒

Hose sliding sleeve

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，使软管

在套筒内可自由滑动伸缩

适配：机器人波纹管，机器人拖链管

Brand: WINLINK



Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Supporting fixed bracket integrated
guiding fixed bracket, flexible hose can slide freely,
double horn mouth design, smooth inner wall

Adaptation: Robot drag chain, robot hose

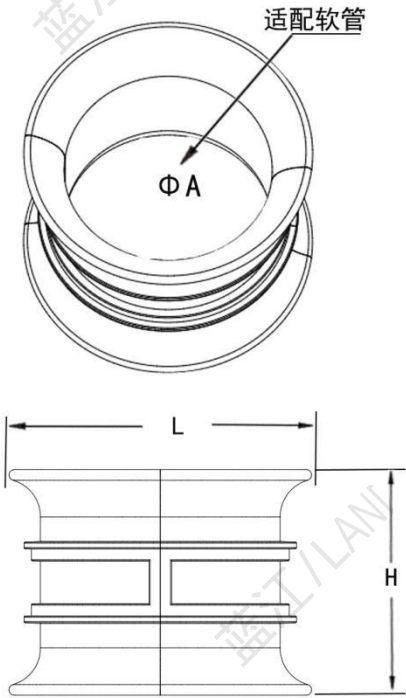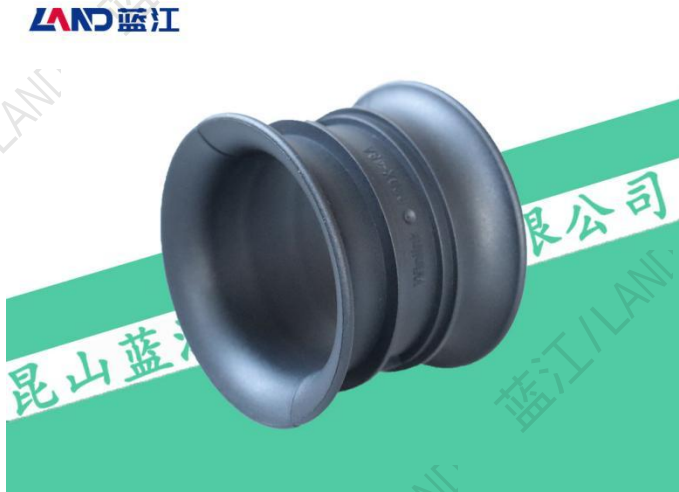

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGDX-28A	28×34.2	60	50	36	20
WLK-RGDX-36A	36×42.3	80	60	45	20
WLK-RGDX-48A	48×54.0	80	60	58	20
WLK-RGDX-56A	56×67.2	112	62	88	10
WLK-RGDX-70A	70×80.0	112	62	88	10

喇叭口前端套筒

Front end sleeve

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，用于六轴固定软管并配合分线

适配：机器人波纹管

Brand: WINLINK


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets, for six axes

Adaptation: robot hose

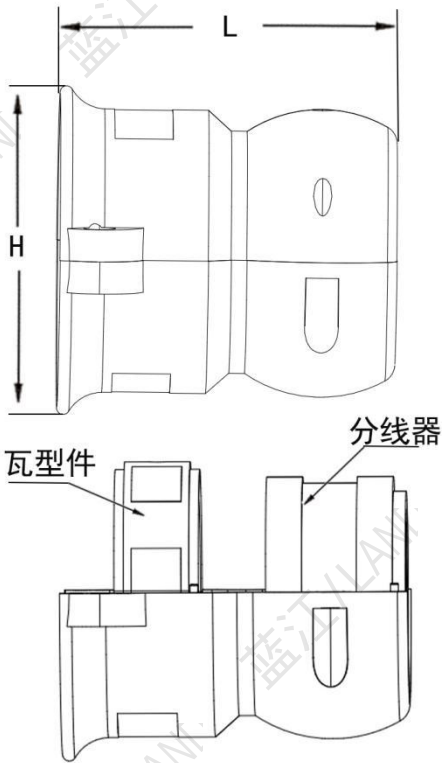

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		球径	包装
Product model	Adapt hose	Bracket size(±1)		Size	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGQD-28A	28×34.2	57	53	53	50
WLK-RGQD-36/48A	36×42.3	83	84	69	10
WLK-RGQD-56/70A	56×67.2	107	109	103	5

活动瓦型件

Robot tile shaped parts

品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，用于六轴

应用：工业机器人，协作机器人

适配：机器人波纹管

Brand: WINLINK

Material: Modified Nylon

Color: Black




Authentication: CE、ROHS

Performance: Pipe package accessories, used in

conjunction with brackets, for six axes

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

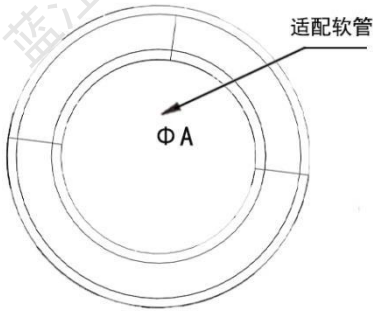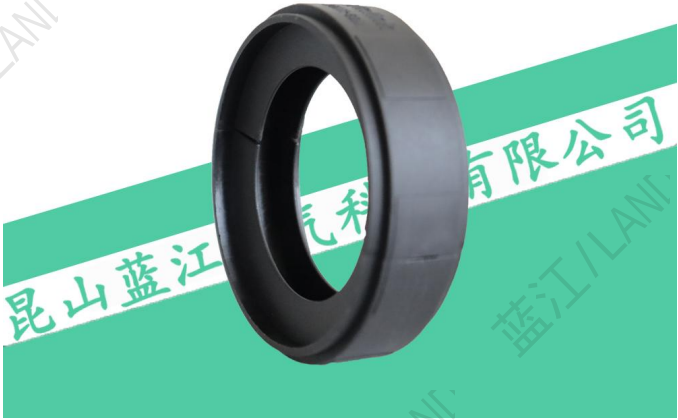

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGWX-36A	36×42.3	62	20	39	50
WLK-RGWX-48A	48×54.0	62	20	50	50
WLK-RGWX-56A	56×67.2	92	28	60	20
WLK-RGWX-70A	70×80.0	92	28	74	20

套筒用分线器

Socket internal splitter

品牌：蓝江/WINLINK

材料：改性橡胶

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用在六轴分线

应用：工业机器人，协作机器人



Brand: WINLINK



Material: Modified rubber

Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets, for dividing lines

Applications: Industrial robots, collaborative robots

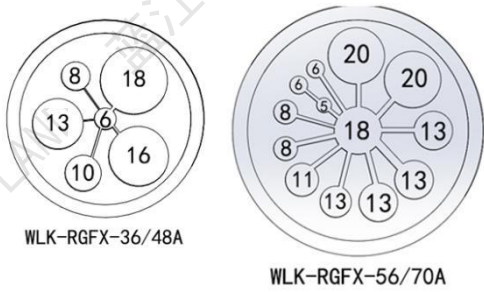

产品选型参数表

蓝江产品型号	配件主体尺寸		多孔尺寸	包装
Product model	Bracket size(±1)		Multi hole size	Packing
PN.	长.L	高.H	mm	PCS
WLK-RGFX-28A	39.0	22.0	实心款，可定制开孔	10
WLK-RGFX-36/48A	54.5	32.5	标准款：18/16/13/10/8/6	10
WLK-RGFX-56/70A	84.0	43.0	标准款：2*20/18/4*13/11/2*8/2*6/5	5

摩擦球分线器

Friction ball splitter

品牌：蓝江/WINLINK

材料：改性橡胶

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合摩擦球使用在六轴分线

应用：工业机器人，协作机器人



Brand: WINLINK

Material: Modified rubber

Color: Black


Authentication: CE、ROHS

Performance: Pipe package accessories, used in

conjunction with friction balls for six axis

branch lines

Applications: Industrial robots, collaborative robots

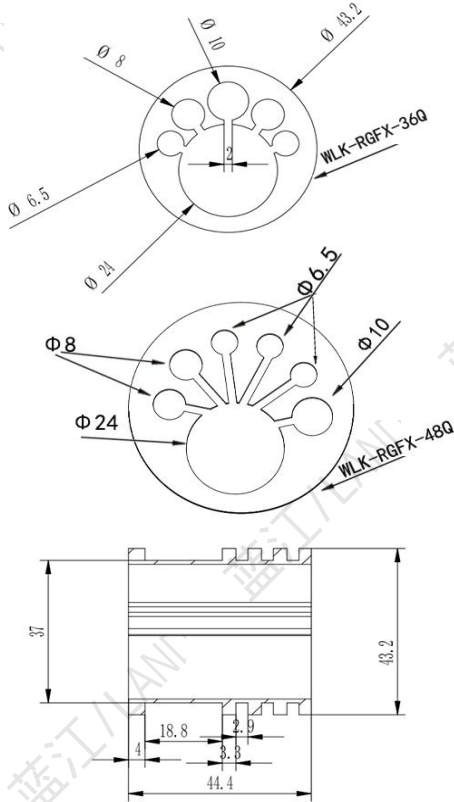

产品选型参数表

蓝江产品型号	配件主体尺寸		多孔尺寸	包装
Product model	Bracket size(±1)		Multi hole size	Packing
PN.	长.L	高.H	mm	PCS
WLK-RGFX-36Q	44	43	标准：24/10/2*8/2*6.5	10
WLK-RGFX-48Q	44	43	标准：24/10/2*8/3*6.5	10
WLK-RGFX-70Q	44	43	标准：4*19.5/16/4*13/9	5

尼龙万向旋转盘

Nylon universal rotating base

品牌：蓝江/Winlink


材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：可以360度万向旋转，配合机器人运动

适配：机器人波纹管

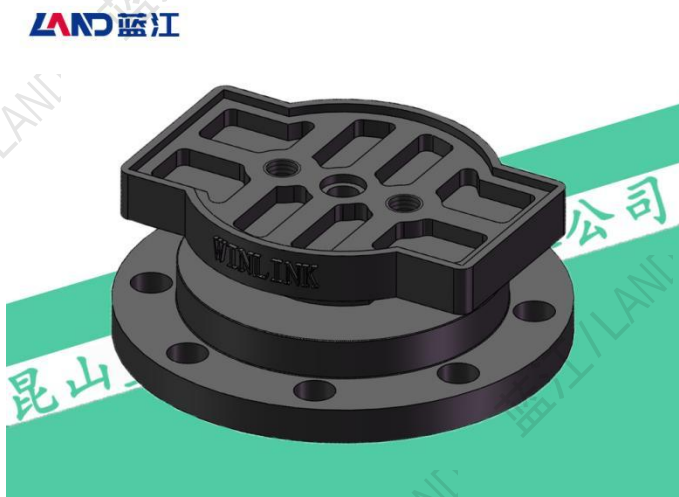

Brand: Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Can rotate 360 degrees in a universal manner to coordinate with robot movement

产品选型参数表

蓝江产品型号	适配支架	底盘安装孔距	底盘安装孔径	包装
Product model	Adaptation bracket	size(±0.5)	Holes size	Packing
PN.	AD	mm	内径. N	PCS
WLK-RGOX-T83	通用WINLINK支架	83	9mm/ (M8)	1

机器人圆形软管支架

Robot circular hose bracket

品牌：蓝江/Winlink

材料：改性尼龙

代码：WLK-RGYK-A

温度：-40° C~105°

性能：圆形外观设计，可直接固定软管

应用：协作机器人，工业机器人



Brand: Winlink

Material: Modified Nylon

Code: WLK-RGYK-A

Temperature: -40 ° C to 105 ° C

Performance: Circular appearance design, can directly fix hoses

Applications: Collaborative Robots, Industrial Robots

产品选型参数表

蓝江产品型号	适配软管	安装孔距	高度	内径	安装孔
Winlink model	Adapt hose	Distance of hole	height	inside diameter	Mounting Hole
PN.	Φ A	mm	mm	mm	mm
WLK-RGYK-56A	56×67.2	26	92	60	6.5
WLK-RGYK-70A	70×80.0	30	100	73	6.5
WLK-RGYK-95A	95×106	30/60	132	99	6.5

工业机器人六轴网球拍

Industrial robot flange connector


品牌：威联科/WINLINK

材料：钣金喷塑

颜色：黑色

性能：机器人六轴连接法兰盘，可随机器人运动而转动，实现软管与前端完美连接

应用：工业机器人，协作机器人

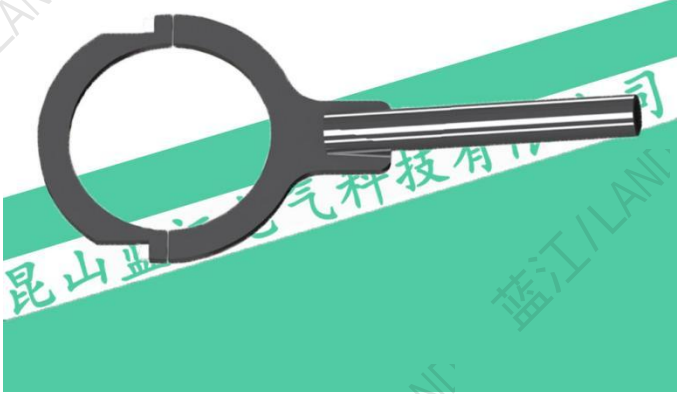


Brand: WINLINK

Material: Sheet metal spray coating

Color: Black

Performance: Matching friction ball, fixed bracket
integrated with ball matching front end fixed bracket

Applications: Industrial robots, collaborative robots

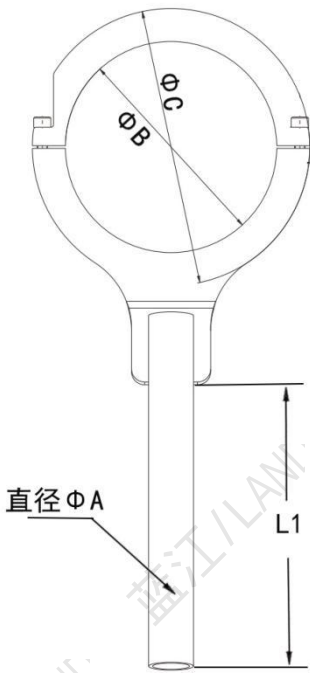

产品选型参数表

蓝江产品型号	手柄直径	法兰圈内径	法兰圈外径	手柄长度
Product model	diameter	inside	outside	length
PN.	Φ A mm	Φ B mm	Φ C mm	L1 mm
WLK-RGWQP-125	27	125	170	160
WLK-RGWQP-140	34	140	190	200
WLK-RGWQP-160	34	160	210	200
WLK-RGWQP-180	34	180	210	200
WLK-RGWQP-190	34	190	250	220
WLK-RGWQP-200	34	200	250	220
WLK-RGWQP-220	34	220	270	220

协作机器人六轴网球拍

Collaborate robot flange connector


品牌：蓝江/WINLINK

材料：钣金喷塑

颜色：黑色

性能：协作机器人六轴连接法兰盘，可随机器人运动而转动，实现软管与前端完美连接

应用：工业机器人，协作机器人

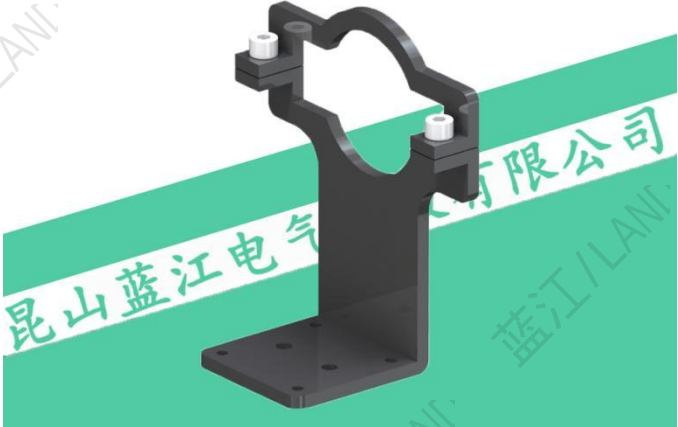

Brand: WINLINK


Material: Sheet metal spray coating

Color: Black

Performance: Matching friction ball, fixed bracket

integrated with ball matching front end fixed bracket

Applications: Industrial robots, collaborative robots

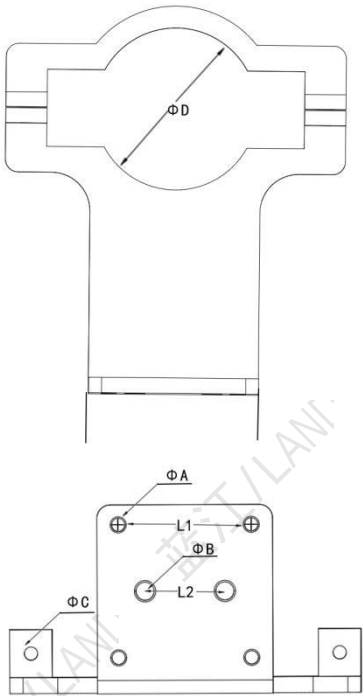

产品选型参数表

蓝江产品型号	孔距		直径			
Product model	L1	L2	Φ A	Φ B	Φ C	Φ D
PN.	mm	mm	mm	mm	mm	mm
WLK-RGWQP-50	50	30	M6	M8	M6	50
WLK-RGWQP-63	50	30	M6	M8	M6	63

本款协作机器人六轴网球拍可以根据机器人型号定制

六轴固定块连接器

Six axis fixed connector

品牌：蓝江/WINLINK

材料：铝制喷塑

颜色：黑色

性能：一端连接六轴网球拍，一端连接前端固定支架，集成为管线包前端系统






Brand: WINLINK

Material: Aluminum spray coating

Color: Black

Performance: One end is connected to a six axis tennis racket, and the other end is connected to a front fixed bracket, integrated into a pipeline package front-end system

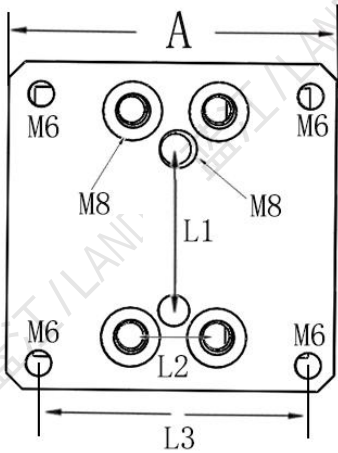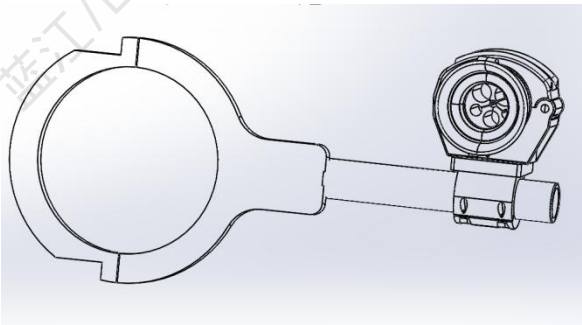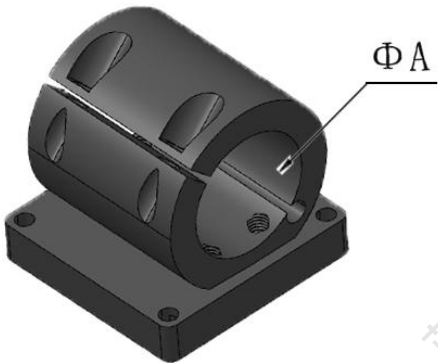

产品选型参数表

蓝江产品型号	孔距		直径	
Product model	L1	L3	Φ A	A
PN.	mm	mm	mm	mm
WLK-RGDK-27	30	50	27	8
WLK-RGDK-34	30	50	34	8

万向铝制旋转盘

Universal aluminum rotating disc


品牌：蓝江/WINLINK

材料：铝制喷塑

颜色：黑色

性能：铝喷塑，耐腐蚀，刚性强，轻量化

应用：工业机器人，协作机器人

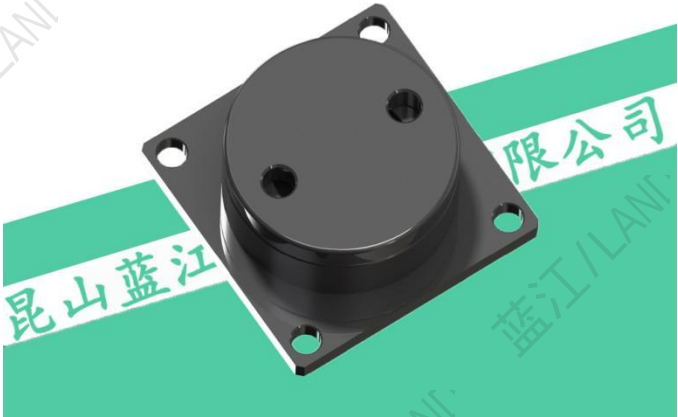


Brand: WINLINK

Material: Aluminum spray coating

Color: Black

Performance: Aluminum spray coating, corrosion-resistant, strong rigidity, lightweight

Applications: Industrial robots, collaborative robots

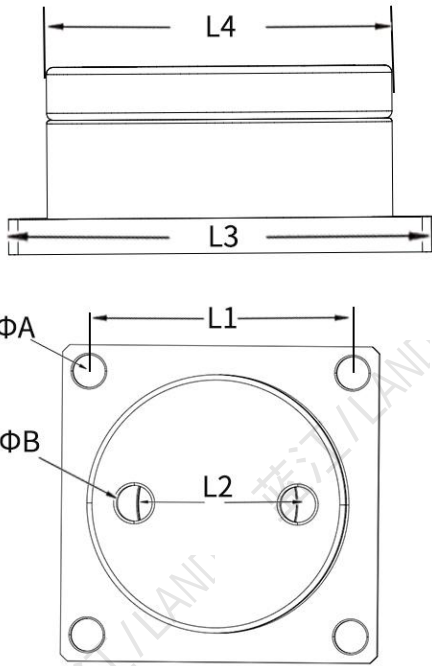

产品选型参数表

蓝江产品型号	孔距		直径		内径	
Product model	L1	L2	L3	L4	Φ A	Φ B
PN.	mm	mm	mm	mm	mm	mm
WLK-RGMX-T60	50	30	60	49	6	M8

三轴伸缩弹簧


Three axis telescopic spring

品牌：蓝江/WINLINK

材料：硅锰弹簧钢/60Si2Mn

性能：硅锰弹簧钢制成，拉伸回弹效果好，
可长时间保持伸缩状态

应用：工业机器人，协作机器人

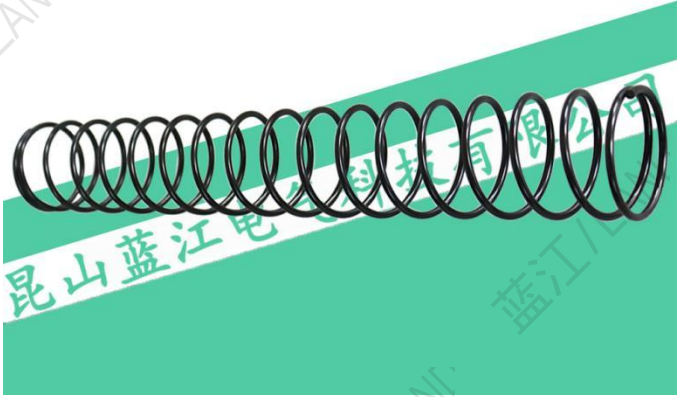


Brand: WINLINK

Material: 60Si2Mn

Performance: Silicon manganese spring steel,
with good tensile rebound effect

Applications: Industrial robots

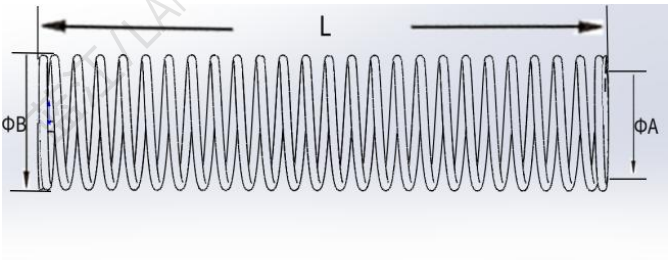

产品选型参数表

蓝江产品型号	内径	外径	总长度	厚度	伸缩量
Product model	inside diameter	outside diameter	length	thickness	Expansion
PN.	Φ A mm	Φ B mm	Φ C mm	mm	mm
WLK-RGSC-36	52	59	400	4	300
WLK-RGSC-48	66	75	500	5	350
WLK-RGSC-70	90	100	950	6	500

导轨弹簧伸缩盒

Rail spring telescopic box


品牌：蓝江/WINLINK

材料：钣金喷漆

颜色：黑色，蓝色

性能：一体压铸成型，内置导轨及弹簧，伸缩回弹性能优越，配套威联科固定支架集成三轴伸缩系统，广泛应用于各种型号机器人

应用：工业机器人

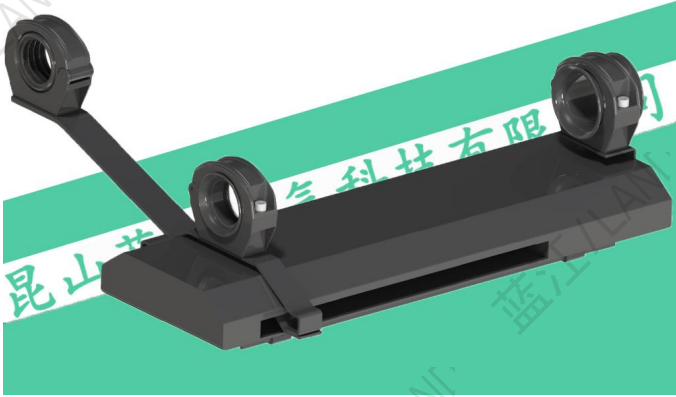

Brand: WINLINK

Material: Sheet metal painting

Color: Black, Blue

Performance: Superior telescopic rebound performance, equipped with Winlink fixed bracket integrated three-axis telescopic system

Applications: Industrial robots

产品选型参数表

蓝江产品型号	适配软管	安装孔距	包装
Product model	Adapted hose	hole spacing	package
PN.	Φ mm	mm	pcs
WLK-RGDG-36A	36×42.3	30	1
WLK-RGDG-48A	48×54.0	30	1
WLK-RGDG-56A	56×67.2	30	1
WLK-RGDG-70A	70×80.0	30	1

建议标配：导轨盒*1，导向支架*1，配球支架*2，延长钣金*1

U型弹簧伸缩盒

U-shaped spring telescopic box


品牌：蓝江/WINLINK

材料：改性尼龙

颜色：黑色，灰色

性能：改性尼龙制成，内置限位球及弹簧，伸缩回弹性能优越，广泛应用于各种型号机器人

应用：工业机器人，协作机器人

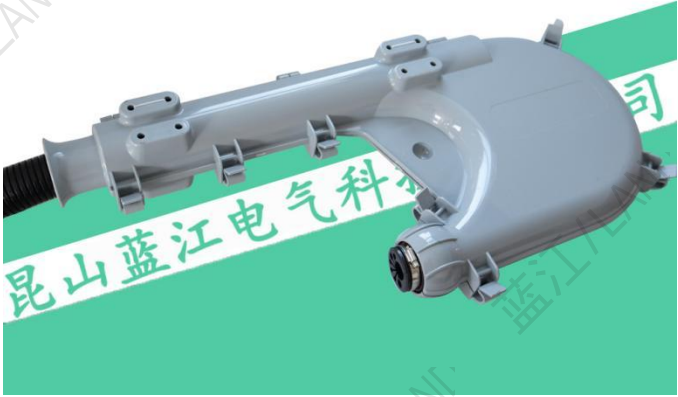

Brand: WINLINK

Material: Modified Nylon

Color: Black, Grey

Performance: Built in limit ball and spring, with superior telescopic rebound performance

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	适配软管	安装结构	包装
Product model	Adapted hose		package
PN.	Φ mm	structure	pcs
WLK-RGLH-36A	36×42.3	一体式	1
WLK-RGLH-48A	48×54.0	一体式	1
WLK-RGLH-70A	70×80.0	一体式	1
WLK-RGLH-36B	36×42.3	分体式	1
WLK-RGLH-48B	48×54.0	分体式	1
WLK-RGLH-70B	70×80.0	分体式	1

建议标配：A型（U型盒体*1，弹簧*1，限位球*1，固定球*1）
B型（U型盒体*1，弹簧*1，限位球*1，固定球*1，分线器*1）

钣金弹簧伸缩盒

Sheet metal spring expansion box

品牌：蓝江/WINLINK

材料：钣金喷漆

颜色：黑色

性能：优质钣金制成，内置限位球及弹簧，伸缩回弹性能优越，广泛应用于各种型号机器人

应用：工业机器人



Brand: WINLINK

Material: Sheet metal painting

Color: Black

Performance: Made of high-quality sheet metal, with built-in limit balls and springs, superior stretchability and rebound performance

Applications: Industrial robots

产品选型参数表

蓝江产品型号	适配软管	安装结构	包装
Product model	Adapted hose	mounting structure	package
PN.	Φ mm	/	pcs
WLK-RGTH-36A	36×42.3	组装式	1
WLK-RGTH-48A	48×54.0	组装式	1
WLK-RGTH-70A	70×80.0	组装式	1

建议标配：定制大钣金*1，罩盖钣金*1，延长钣金*1，弹簧*1，限位球*1，导向支架*2，配球支架*1



拖链管线包系统

在工业生产过程中，机器人的应用越来越广泛，复杂的生产环境，不仅需要机器人多维运动确保生产作业的流畅性，更要适应严苛的工作环境。而机器人万向多维拖链管凭借其伸缩，扭转与弯曲相结合的三维特性，使工业机器人在工作中游刃有余。

拖链管线包系统包括：

- ①万向拖链管（64-65页）
- ②拖链固定支架（66-68页）
- ③拖链旋转支架（69-71页）
- ④拖链协作支架（72-74页）
- ⑤拖链配件系列（75-76页）

蓝江万向拖链可实现万向旋转，扭曲与伸缩，内部采用螺丝固定，抗拉力极强，可跟随机器人运动而转动，另有配球支架，滑动支架，前端支架，伸缩盒等提供配套，实现整体1-6轴管线包定制，满足个性化定制。

机器人侧开拖链管

Robot side opening drag chain tube

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：耐磨性好，三维万向伸缩，扭转，弯曲

应用：工业机器人，协作机器人



Brand: Winlink


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS


Performance:Wear resistant, stretchable, twisting, bending

Applications: Industrial robots, collaborative robots



产品选型参数表

蓝江产品型号	内部宽度		最大电缆直径		外径	弯曲半径
Product model	inner width		Maximum cable		outside	bending
PN.	L1 mm	L2 mm	D1 mm	D2 mm	L mm	mm
WLK-RGTL-30K	12	10	10	8	34	50
WLK-RGTL-38K	15	13	13	11	42	58
WLK-RGTL-48K	19	16	16	14	54	80
WLK-RGTL-57K	22	19	20	17	65	87
WLK-RGTL-70K	28	24	26	22	80	110
WLK-RGTL-95K	37	32	35	30	108	145

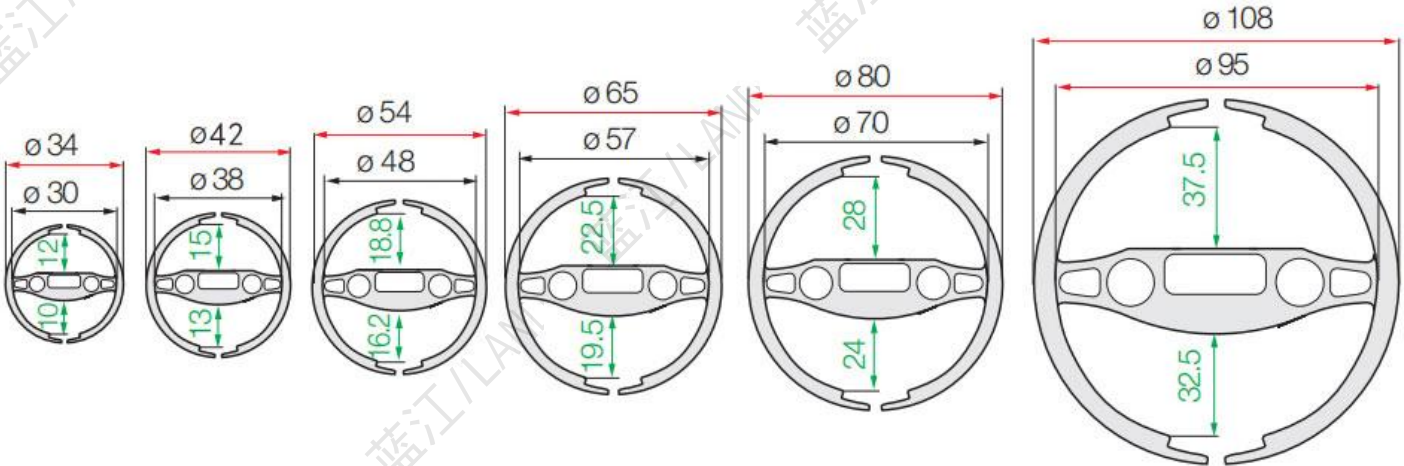

机器人封闭拖链管

Robot enclosed drag chain tube

品牌：蓝江/Winlink


材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：耐磨性好，三维万向伸缩，扭转，弯曲

应用：工业机器人，协作机器人

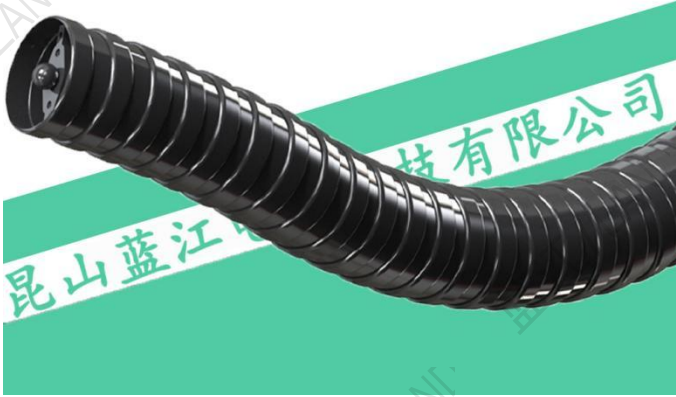

Brand: Winlink


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS


Performance:Wear resistant, stretchable, twisting, bending

Applications: Industrial robots, collaborative robots



产品选型参数表

蓝江产品型号	内部宽度		最大电缆直径		外径	弯曲半径
Product model	inner width		Maximum cable		outside	bending
PN.	L1 mm	L2 mm	D1 mm	D2 mm	L mm	mm
WLK-RGTL-30B	12	10	10	8	34	50
WLK-RGTL-38B	15	13	13	11	42	58
WLK-RGTL-48B	19	16	16	14	54	80
WLK-RGTL-57B	22	19	20	17	65	87
WLK-RGTL-70B	28	24	26	22	80	110
WLK-RGTL-95B	37	32	35	30	108	145

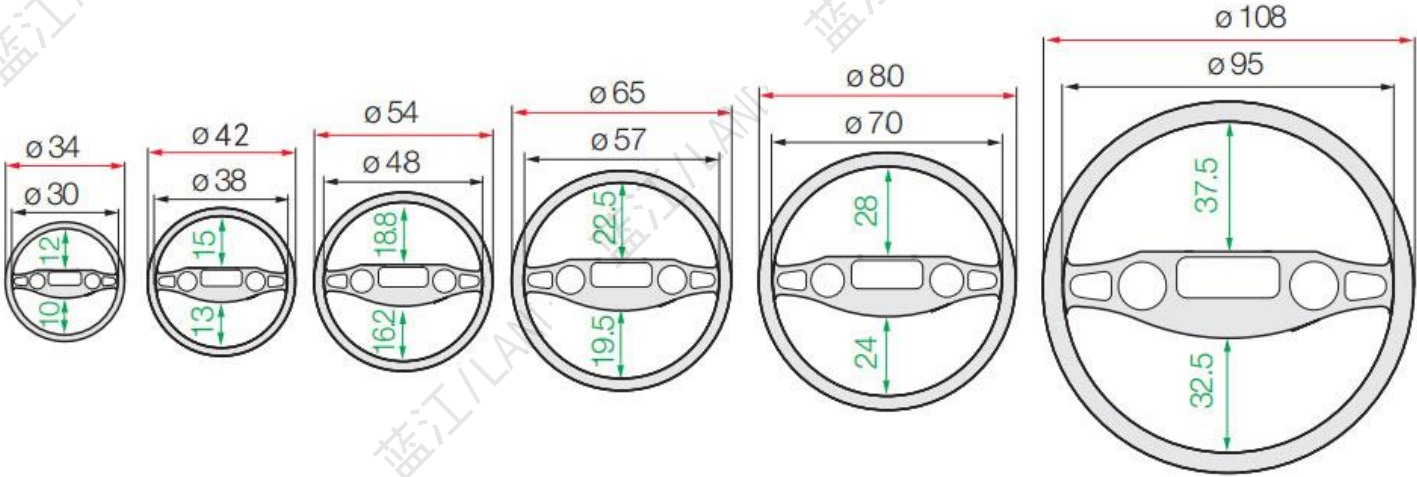

拖链配球固定支架

Drag chain ball fixing bracket

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：单扣适配器，可固定任意节距软管及拖链，
可配合机器人360摆动
应用：机器人拖链，机器人波纹管





Brand: Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Single buckle adapter, can fix
hoses and drag chains of any pitch
Application: Robot drag chain, robot hose

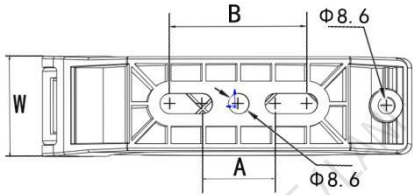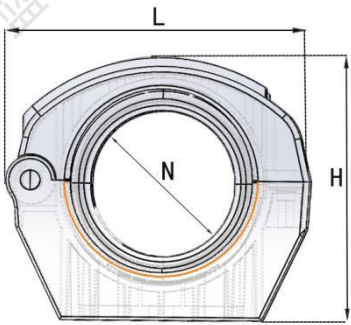

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGTLR-30A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGTLR-38A	R38	36×42.3	105	34	93	30~44	45	10
WLK-RGTLR-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGTLR-57A	R57	56×67.2	150	38	135	30~56	63	5
WLK-RGTLR-70A	R70	70×80.0	150	38	135	30~56	88	5

拖链导向滑动支架

Drag chain sliding bracket

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：双头喇叭口设计，内壁光滑，软管可自由伸缩滑动

应用：机器人拖链管、机器人波纹管



Brand: Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Double headed horn mouth design, smooth inner wall, flexible hose can freely expand and slide

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

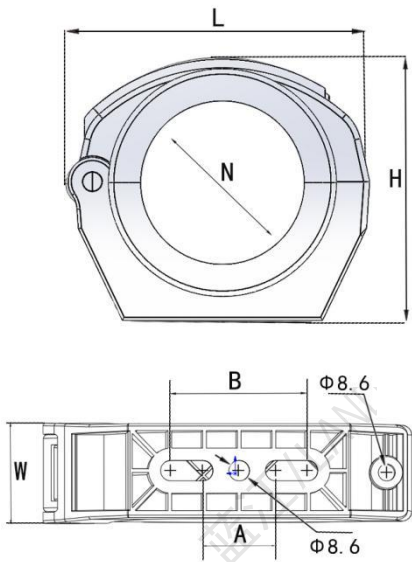

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGZD-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGZD-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGZD-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGZD-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGZD-70A	R70	70×80.0	150	38	135	30~56	88	5

拖链前末端固定支架

Drag chain six axis bracket

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：机器人前端节点对拖链进行固定并出线

适配：机器人拖链管、机器人波纹管



Brand: Winlink


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: The front-end node of the robot
fixes the drag chain and leads it out

Adaptation: Robot drag chain, robot hose

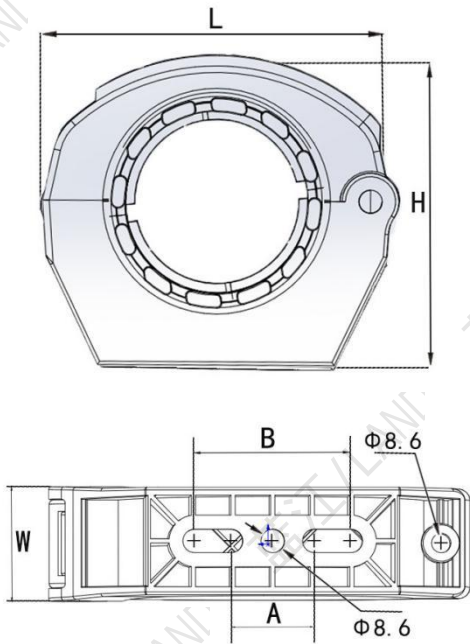

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长. L	宽. W	高. H	A~B mm	内径. N	PCS
WLK-RGTFW-30A	R30	28×34.2	82	33	72	30~33	36	10
WLK-RGTFW-38A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGTFW-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGTFW-57A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGTFW-70A	R70	70×80.0	150	38	135	30~56	88	5

拖链旋转配球支架

Drag chain rotating ball bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝万向旋转盘为底座，连接万能配球固定座支架，可以实现跟随机器人万向旋转

适配：机器人拖链，机器人波纹管

Brand: Winlink


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot hoses and drag chains, it can rotate along with the robot's movement

Adaptation: Robot drag chain, robot hose

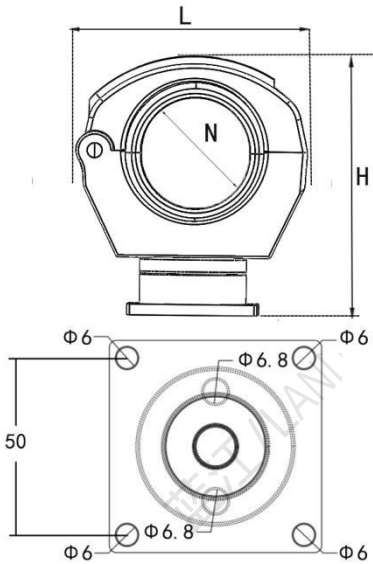

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底盘孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	厚.W	高.H	mm	内径.N	PCS
WLK-RGMXQ-23A	/	23×28.2	82	34	99	50	27	10
WLK-RGMXQ-28A	R30	28×34.2	82	34	99	50	32	10
WLK-RGMXQ-36A	R38	36×42.3	105	33	120	50	37	10
WLK-RGMXQ-48A	R48	48×54.0	105	33	120	50	48.5	10
WLK-RGMXQ-56A	R57	56×67.2	150	38	162	50	63	5
WLK-RGMXQ-70A	R70	70×80.0	150	38	162	50	72	5

拖链旋转滑动支架

Drag chain rotating guide bracket

品牌：蓝江/Winlink


材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接导向固定座支架, 内壁光滑, 可以实现跟随机器人万向旋转

适配：机器人拖链管、机器人波纹管

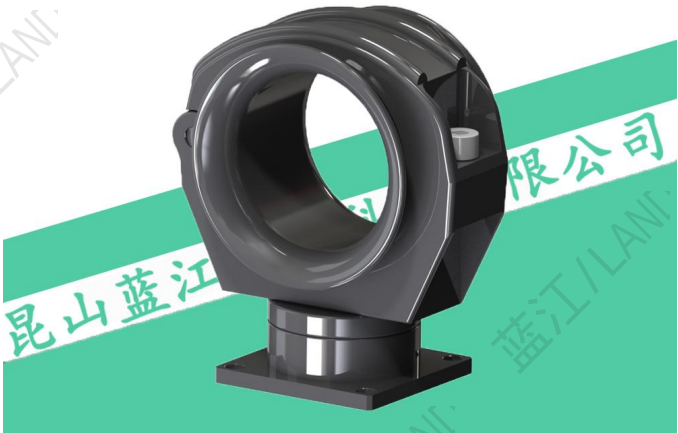

Brand: Winlink


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot hoses and drag chains, the inner wall is smooth and can follow the movement of the robot to expand and rotate

Adaptation: Robot drag chain, robot hose

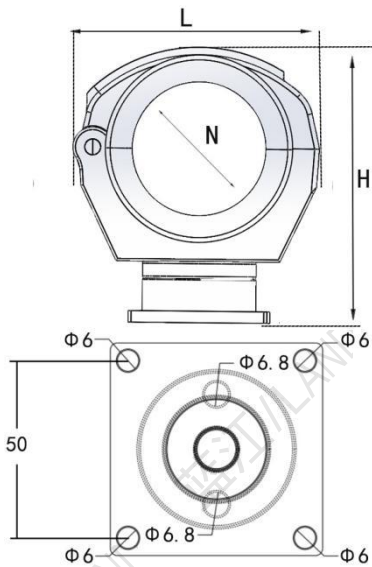

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDMX-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDMX-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDMX-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDMX-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDMX-70A	R70	70×80.0	150	38	135	30~56	88	5

拖链旋转前末端支架

Drag chain rotating six axis bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接带爪前末端固定座支架，可以实现跟随机器人万向旋转

适配：机器人拖链管，机器人波纹管

Brand: Winlink


Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance: Equipped with robot drag chains and hoses, fixed and divided lines, which can expand and rotate with the movement of the robot

Adaptation: Robot drag chain, robot hose

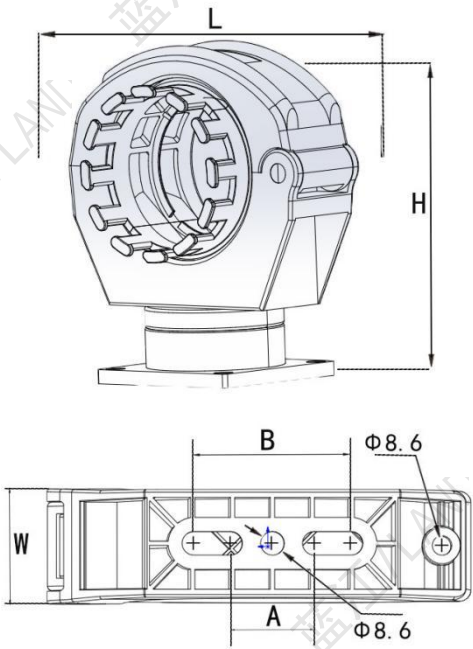

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底盘孔距	孔数	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	holes	Packing
PN.	AD	AD	长. L	厚. W	高. H	A~B mm	N	PCS
WLK-RGMXF-23A	/	23×28.2	82	34	99	50	定制	10
WLK-RGMXF-28A	R30	28×34.2	82	34	99	50	定制	10
WLK-RGMXF-36A	R38	36×42.3	105	33	120	50	6孔	10
WLK-RGMXF-48A	R48	48×54.0	105	33	120	50	6孔	10
WLK-RGMXF-56A	R57	56×67.2	150	38	162	50	13孔	5
WLK-RGMXF-70A	R70	70×80.0	150	38	162	50	13孔	5

协作机器人拖链固定支架

Collaborative robot drag chain fixed bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架固定拖链及软管

适配：机器人拖链，机器人波纹管




Brand: Winlink

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the mechanical arm with a clamp, fix the drag chain and hose with a bracket

Adaptation: Robot drag chain, robot hose

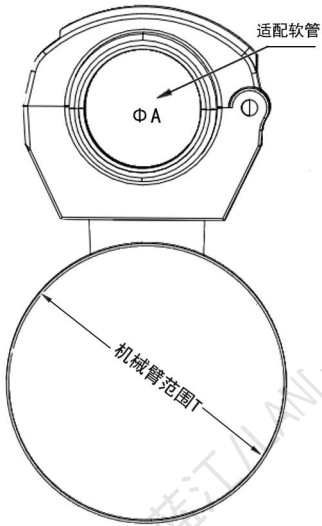

产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	AD	Φ A	PCS	T mm		
WLK-RGTLQ-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGTLQ-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGTLQ-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGTLQ-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGTLQ-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGTLQ-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作机器人拖链滑动支架

Collaborative robot drag chain sliding bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：抱箍锁紧机械手臂，支架内壁光滑，软管可自由伸缩滑动。

适配：机器人拖链，机器人波纹管



Brand: Winlink

Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the mechanical arm with a clamp, the inner wall of the bracket is smooth, and the hose can freely extend and slide.

Adaptation: Robot drag chain, robot hose



产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	AD	Φ A	PCS	T mm		
WLK-RGCPD-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPD-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPD-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPD-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPD-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPD-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作机器人拖链前端支架

Collaborative robot drag chain six axis bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人前端手臂抱紧，并锁紧软管出线

适配：机器人拖链，机器人波纹管



Brand: Winlink

Material: Modified Nylon, stainless steel

Authentication: CE、ROHS

Performance:The front arm of the robot is tightly held, locking the hose outlet

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	Φ A	Φ A	PCS	T mm		
WLK-RGTLF-30A	R30	28×34.2	10	56-59mm	60-63mm	64-67mm
WLK-RGTLF-38A	R38	36×42.3	10	68-73mm	74-79mm	80-85mm
WLK-RGTLF-48A	R48	48×54.0	10	86-91mm	92-97mm	98-103mm
WLK-RGTLF-57A	R57	56×67.2	10	104-112mm	113-121mm	122-130mm
WLK-RGTLF-70A	R70	70×80.0	5	131-139mm	140-148mm	149-161mm

拖链摩擦球

Drag chain friction ball

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：单扣锁紧设计，可配套支架使用，也可以单独用于摩擦球，通用拖链与软管，具备耐摩擦，可转动，钢性强，耐腐蚀性等特点

适配：机器人拖链管，机器人波纹管



Brand: Winlink



Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Install friction balls at key nodes of the drag chain to protect it

Adaptation: Robot drag chain, robot hose

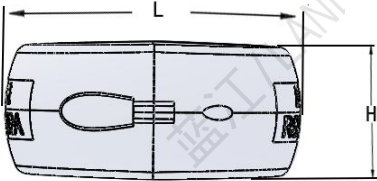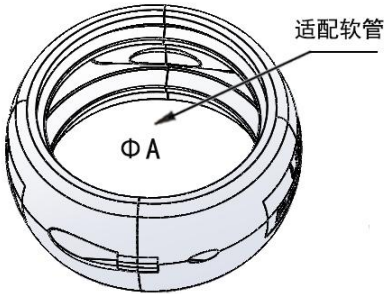

产品选型参数表

蓝江产品型号	适配拖链	适配软管	配件主体尺寸		内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)		inside	Packing
PN.	Φ A	Φ A	长.L	高.H	N mm	PCS
WLK-RGT-23A	/	23×28.2	53	35	27	50
WLK-RGT-28A	R30	28×34.2	53	35	32	50
WLK-RGT-36A	R38	36×42.3	70	47	37	20
WLK-RGT-48A	R48	48×54.0	70	36	48.5	20
WLK-RGT-56A	R57	56×67.2	103	47	63	5
WLK-RGT-70A	R70	70×80.0	103	47	72	5

拖链前端球套

Drag chain front end ball sleeve

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：管线包配件，配套支架使用于六轴分线

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管，机器人波纹管

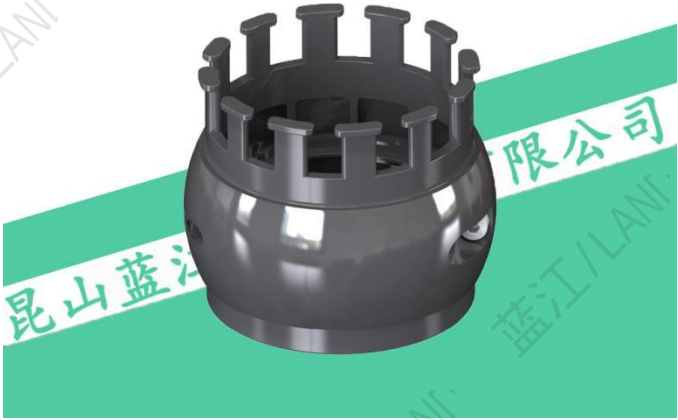

Brand: Winlink

Material: Modified Nylon

Color: Black


Authentication: CE、ROHS

Performance: Pipeline package accessories, matched with brackets for use in six axis distribution lines

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	适配拖链	适配软管	整袋包装
Product model	drag chain	Adapt hose	package
PN.	Φ A	Φ A	pcs
WLK-RGF-30A	R30	28×34.2	10
WLK-RGF-38A	R38	36×42.3	10
WLK-RGF-48A	R48	48×54.0	10
WLK-RGF-57A	R57	56×67.2	5
WLK-RGF-70A	R70	70×80.0	5

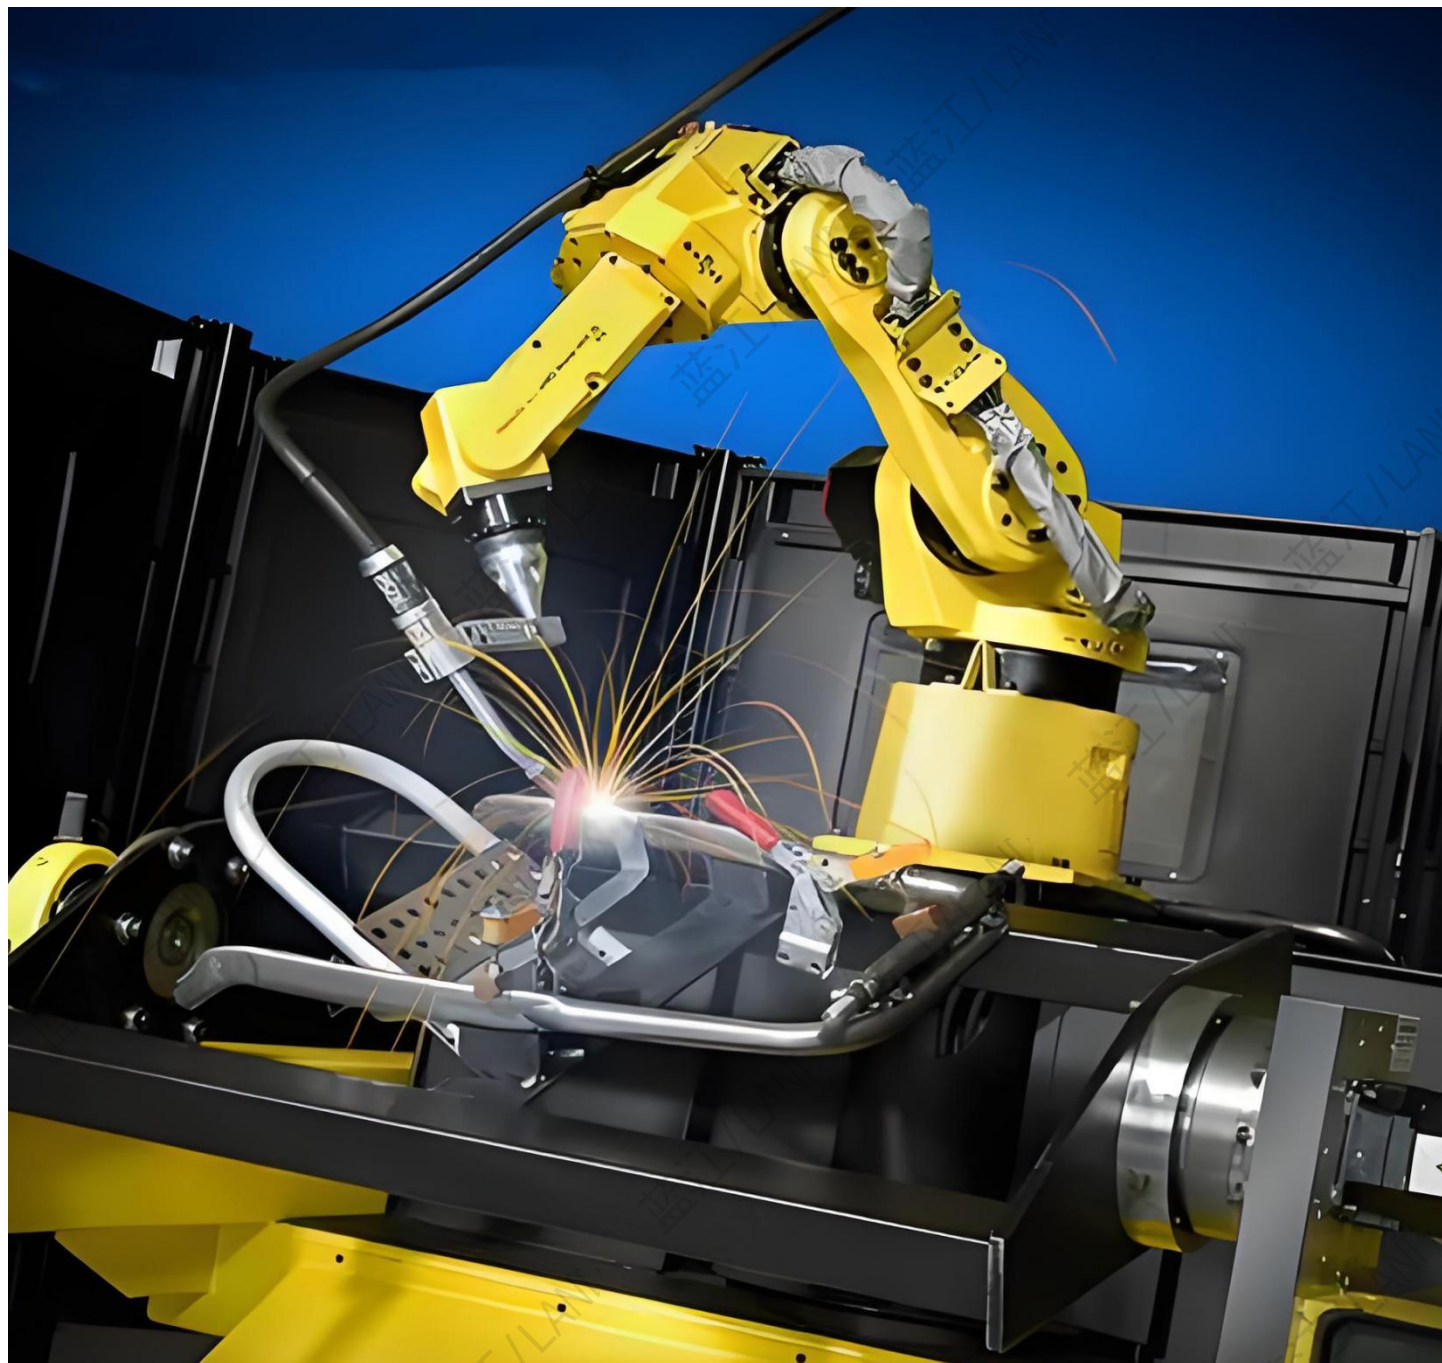

包线布机器人管线包系统

机器人包线布因其使用简单，功能齐全而被广泛应用于各类机器人保护线束。

根据不同场景，可以选择焊接式，阻燃式，无尘式，电磁屏蔽式等，环保材质制成，耐磨，防水，阻燃，可反复使用，广泛应用于各类机器人。

而使用仅需包线布配合绑带或者扎带即可完成线束固定，大大节约了时间成本

①耐磨阻燃包线布（78页）

②阻燃耐磨包线布（79页）

③阻燃扣式包线布（80页）

耐磨阻燃机器人包线布

Wear resistant robot conduit


品牌：蓝江/Winlink

材料：凯拉夫纤维，魔术贴

颜色：浅灰色

性能：防飞溅，阻燃，耐磨，防水，耐高温

应用：工业机器人，协作机器人

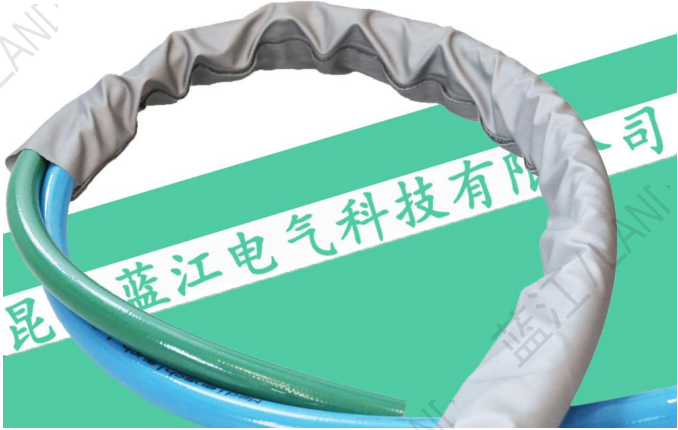

Brand: Winlink

Material:Kailaf fiber, Velcro

Color: Light Grey

Performance: Splash proof, flame retardant, wear-resistant, waterproof, high temperature resistant

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	布展宽度	直径	整盒长度
Product model	width	diameter	length
PN.	Φ mm	Φ mm	米/M
WLK-RGNW-15G	75	15	25M
WLK-RGNW-20G	84	20	25M
WLK-RGNW-25G	100	25	25M
WLK-RGNW-30G	115	30	25M
WLK-RGNW-40G	147	40	25M
WLK-RGNW-50G	183	50	25M
WLK-RGNW-60G	220	60	25M
WLK-RGNW-70G	246	70	25M
WLK-RGNW-100G	340	100	25M

阻燃机器人包线布

Fireproof robot conduit


品牌：蓝江/Winlink

材料：尼龙/PVC

颜色：黑色

性能：阻燃，防水，耐磨，耐温，牢固

应用：工业机器人，协作机器人

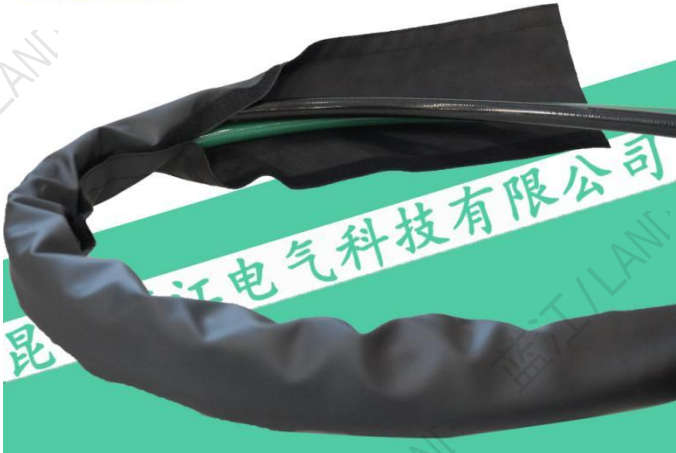

Brand: Winlink

Material: Nylon/PVC

Color: Black

Performance: Flame retardant, waterproof, wear-resistant, temperature resistant

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	内径	适用内径	布展宽度	厚度	整盒长度
Product model	within Φ	In use Φ	width	thickness	box length
PN.	mm	mm	Φ mm	mm	米/M
WLK-RGNT-15B	15	14-15	75	0.7	50M
WLK-RGNT-20B	20	17-20	90	0.7	50M
WLK-RGNT-25B	25	21-25	105	0.7	50M
WLK-RGNT-30B	30	26-30	120	0.7	50M
WLK-RGNT-35B	35	31-35	140	0.7	50M
WLK-RGNT-40B	40	36-40	155	0.7	50M
WLK-RGNT-50B	50	41-50	185	0.7	50M
WLK-RGNT-60B	60	51-60	220	0.7	50M
WLK-RGNT-70B	70	61-70	245	0.7	50M
WLK-RGNT-80B	80	71-80	280	0.7	50M
WLK-RGNT-90B	90	81-90	310	0.7	50M
WLK-RGNT-100B	100	91-100	345	0.7	50M

扣式机器人包线布

Button style robot conduit


品牌：威联科/Winlink

材料：尼龙/PVC

颜色：黑色

性能：阻燃，防水，耐磨，耐温，牢固

应用：工业机器人，协作机器人

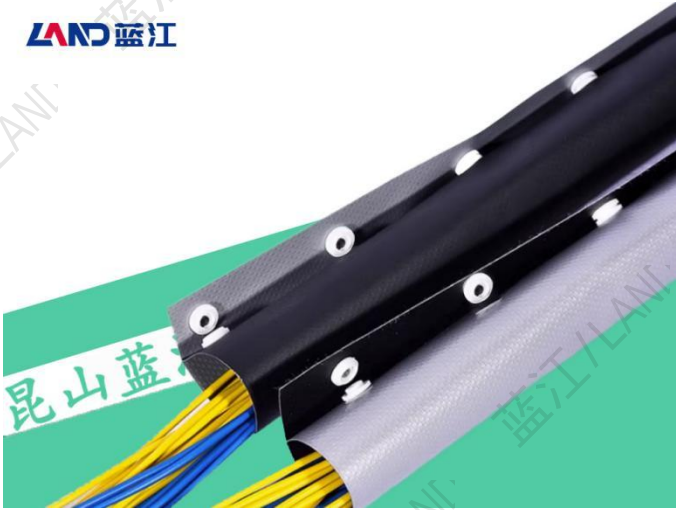

Brand: Winlink

Material: Nylon/PVC

Color: Black

Performance: Flame retardant, waterproof, wear-resistant, temperature resistant

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	宽度	束径	整盒长度
Product model	width	In use ϕ	box length
PN.	mm	mm	米/M
WLK-RGNK-10B	57	10	50M
WLK-RGNK-15B	75	15	50M
WLK-RGNK-20B	90	20	50M
WLK-RGNK-25B	100	25	50M
WLK-RGNK-30B	115	30	50M
WLK-RGNK-40B	146	40	50M
WLK-RGNK-50B	175	50	50M
WLK-RGNK-70B	241	70	50M
WLK-RGNK-100B	333	100	50M