

LAND 蓝江

**MADE IN 
CHINA**

中国制造 引领未来

Made in China Leading the Future



蓝江软管与管接头.2025-A3版

LAND Electronic Manual. 2025-A3 Edition



创新 引领未来

Customer first, service foremost
客户第一，服务至上



公司简介 company Profile

昆山蓝江电气科技有限公司，成立于2010年，地址位于苏州昆山市，我们始终专注于电缆防水接头，软管与管接头，机器人管线包研发与生产，公司严格执行ISO9001质量体系标准，可靠的质量，快速的交期获得广大客户一致认可。

业务介绍 Company business

电缆防水接头系列



软管及管接头系列



机器人管线包系统




昆山蓝江电气科技有限公司

Kunshan Land Electric Technology Co., Ltd

产品页码索引

LAND 蓝江

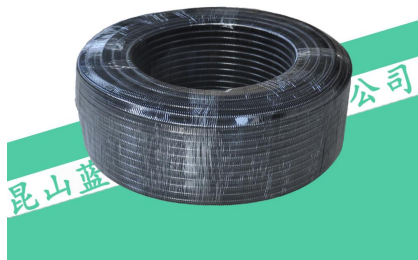

波纹管系列(6-11页)

LAND 蓝江



防水密封管接头(12-17页)

LAND 蓝江



防水管金属接头(18-22页)

LAND 蓝江



90度防水管弯头(23-24页)

LAND 蓝江



防水内牙管接头(25-26页)

LAND 蓝江



拧紧防水管接头(27页)

LAND 蓝江



快速管接头(28-30页)

LAND 蓝江



快速管弯头(31-33页)

LAND 蓝江



快速金属牙管接头(34-35页)

LAND 蓝江



快速内牙管接头(36-37页)

LAND 蓝江



90度弧形管弯头(38-39页)

LAND 蓝江



快速电缆软管接头(40-41页)

产品页码索引

LAND 蓝江



带锁紧快速管接头(42-46页)

LAND 蓝江




带锁紧防水管接头(47-50页)

LAND 蓝江



带锁紧快速管弯头(51-54页)

LAND 蓝江

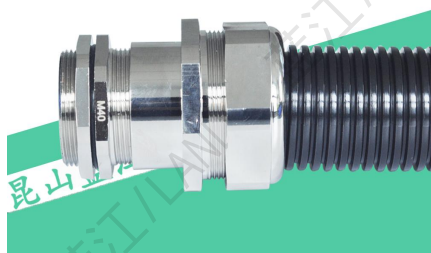

带锁紧管金属接头(55-62页)

LAND 蓝江



万向旋转管接头(63页)

LAND 蓝江



三通二通管接头(64-70页)

LAND 蓝江



抗拉带爪管接头(71-73页)

LAND 蓝江



双拼管可拆接头(74页)

LAND 蓝江



法兰软管固定座(75-77页)

LAND 蓝江



软管钢管连接器(78页)

LAND 蓝江



软管支架(79-80页)


LAND 蓝江



软管护套(81-82页)


产品页码索引

LAND 蓝江

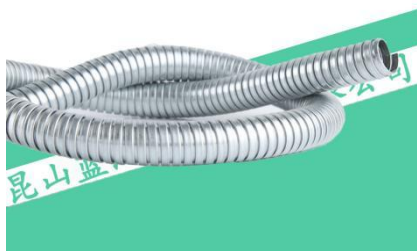

锌合金裸露软管(83-84页)

LAND 蓝江

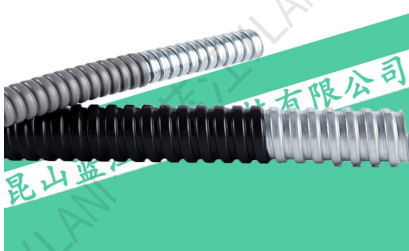


锌合金包塑软管(85-89页)

LAND 蓝江



平包塑金属软管(90-91页)

LAND 蓝江

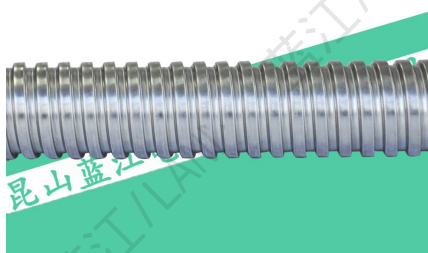

不锈钢裸露软管(92-95页)

LAND 蓝江



不锈钢包塑软管(96-100页)

LAND 蓝江



不锈钢编织管(101页)

LAND 蓝江




锌合金软管接头(102-108页)

LAND 蓝江



带锁紧不锈钢管接头(109-111页)

LAND 蓝江

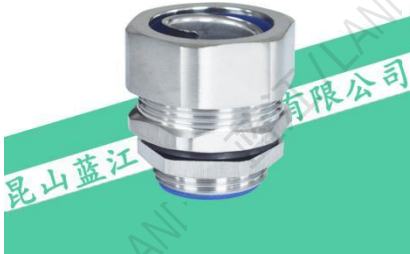

不锈钢软管接头(112-119页)

LAND 蓝江



铜镀镍软管接头(120-121页)

LAND 蓝江



尼龙材质软管接头(122页)

LAND 蓝江



90度金属弯头(123-124页)

环保尼龙波纹管

Nylon flexible conduit

品牌：蓝江/Land

材料：尼龙6

阻燃：UL94V-2

温度：-40°C-105°C

性能：韧性好，表面光泽，耐扭曲，高机械强度

应用：机床，照明，安防，轨道交通，机械设备

Brand: Land


Material: Nylon 6

Flame retardant: UL94V-2

Temperature:- 40°C-105°C

Performance: Soft and tough, glossy surface, torsion resistant, high mechanical strength

Applications: Machine tools, lighting, security access control, rail transit etc

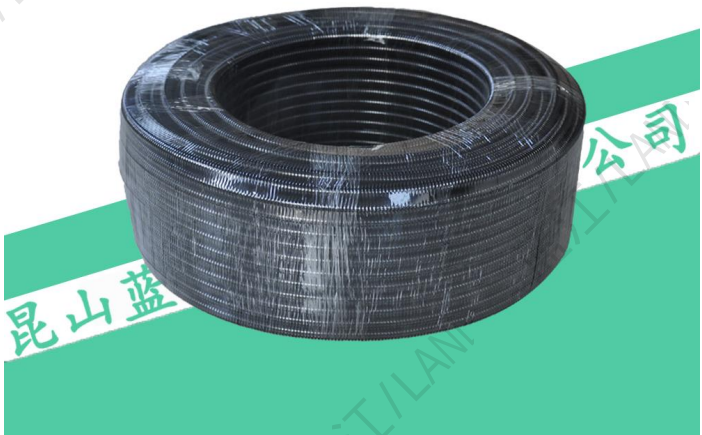

产品选型参数表

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半径	包装数量
Product model	Metric	ID×OD	Stat. r	Dyn. r	Packing
PN.	Φ mm	mm	mm	mm	M/ring
PA-AD10.0	Φ 10	6.5×10	15	35	100
PA-AD13.0	Φ 13	9.5×13	20	45	100
PA-AD15.8	Φ 15.8	12×15.8	25	55	100
PA-AD18.5	Φ 18.5	14.3×18.5	35	65	100
PA-AD21.2	Φ 21.2	17×21.2	40	75	100/50
PA-AD25.5	Φ 25.5	21×25.5	42	85	50
PA-AD28.5	Φ 28.5	23×28.5	45	100	50
PA-AD34.5	Φ 34.5	29×34.5	55	120	25
PA-AD42.5	Φ 42.5	36×42.5	65	150	25
PA-AD54.5	Φ 54.5	48×54.5	80	190	25
PA-AD67.2	Φ 67.2	56.3×67.2	130	270	20
PA-AD80.0	Φ 80	66.5×80	170	350	20
PA-AD106.0	Φ 106	91×106	225	450	10

阻燃尼龙波纹管

Flame retardant nylon corrugated pipe

品牌：蓝江/Land



材料：尼龙6

阻燃：UL94V-0

温度：-40°C-105°C

性能：韧性好，表面光泽，耐扭曲，防火阻燃

应用：机床，照明，安防，轨道交通，机械设备



Brand: Land

Material: Nylon 6

Flame retardant: UL94V-0

Temperature:- 40°C-105°C

Performance: Soft and tough, glossy surface, torsion resistant, high mechanical strength

Applications: Machine tools, lighting, security access control, rail transit etc

产品选型参数表

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半径	包装数量
Product model	Metric	ID×OD	Stat. r	Dyn. r	Packing
PN.	Φ mm	mm	mm	mm	M/ring
PA-AD10.0-V0	Φ 10	6.5×10	15	35	100
PA-AD13.0-V0	Φ 13	9.5×13	20	45	100
PA-AD15.8-V0	Φ 15.8	12×15.8	25	55	100
PA-AD18.5-V0	Φ 18.5	14.3×18.5	35	65	100
PA-AD21.2-V0	Φ 21.2	17×21.2	40	75	100/50
PA-AD25.5-V0	Φ 25.5	21×25.5	42	85	50
PA-AD28.5-V0	Φ 28.5	23×28.5	45	100	50
PA-AD34.5-V0	Φ 34.5	29×34.5	55	120	25
PA-AD42.5-V0	Φ 42.5	36×42.5	65	150	25
PA-AD54.5-V0	Φ 54.5	48×54.5	80	190	25
PA-AD67.2-V0	Φ 67.2	56.3×67.2	130	270	20
PA-AD80.0-V0	Φ 80	66.5×80	170	350	20
PA-AD106.0-V0	Φ 106	91×106	225	450	10

PE加厚波纹管

PE Corrugated Pipe

品牌：蓝江/Land

材料：聚乙烯

阻燃：UL94-HB

温度：-40°C-105°C

性能：柔软有韧性，加厚设计，表面光泽，

应用：机床，照明，安防，轨道交通，机械设备

Brand: Land

Material: polyethylene

Flame retardant: UL94-HB

Temperature:- 40°C-105°C

Performance: The product is soft, with a thickened design, a glossy surface, and toughness

Applications: Machine tools, lighting, security access control, rail transit etc



产品选型参数表

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半	包装数量
Product model	Metric	ID×OD	Stat. r	Dyn. r	Packing
PN.	Φ mm	mm	mm	mm	M/ring
PE-AD10.0	Φ 10	6.5×10	15	35	100
PE-AD13.0	Φ 13	9.5×13	20	45	100
PE-AD15.8	Φ 15.8	12×15.8	25	55	100
PE-AD18.5	Φ 18.5	14.3×18.5	35	65	100
PE-AD21.2	Φ 21.2	17×21.2	40	75	100/50
PE-AD25.5	Φ 25.5	21×25.5	42	85	50
PE-AD28.5	Φ 28.5	23×28.5	45	100	50
PE-AD34.5	Φ 34.5	29×34.5	55	120	50/25
PE-AD42.5	Φ 42.5	36×42.5	65	150	25
PE-AD54.5	Φ 54.5	48×54.5	80	190	25
PE-AD67.2	Φ 67.2	56.3×67.2	130	270	25
PE-AD80.0	Φ 80	66.5×80	170	350	25
PE-AD106.0	Φ 106	91×106	225	450	25

PP阻燃波纹管

PP flame retardant corrugated pipe

品牌：蓝江/Land

材料：聚丙烯

阻燃：UL94V-0

温度：-40℃-105℃

性能：硬度高，加厚设计，耐磨擦，强度好

应用：机床，照明，安防，轨道交通，机械设备

Brand: Land


Material: polypropylene

Flame retardant: UL94V-0

Temperature:- 40℃-105℃

Performance: The product has high hardness, thickened design, abrasion resistance

Applications: Machine tools, lighting, security access control, rail transit etc

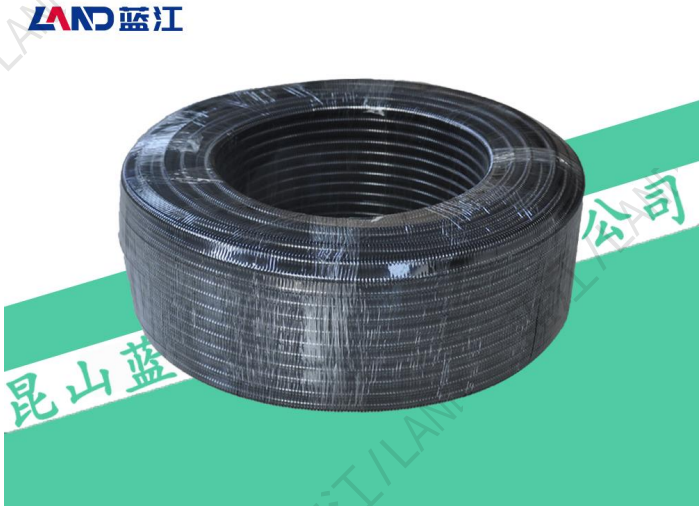

产品选型参数表

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半径	包装数量
Product model	Metric	ID×OD	Stat. r	Dyn. r	Packing
PN.	Φ mm	mm	mm	mm	M/ring
PP-AD10.0-V0	Φ 10	6.5×10	15	35	100
PP-AD13.0-V0	Φ 13	9.5×13	20	45	100
PP-AD15.8-V0	Φ 15.8	12×15.8	25	55	100
PP-AD18.5-V0	Φ 18.5	14.3×18.5	35	65	100
PP-AD21.2-V0	Φ 21.2	17×21.2	40	75	50
PP-AD25.5-V0	Φ 25.5	21×25.5	42	85	50
PP-AD28.5-V0	Φ 28.5	23×28.5	45	100	50
PP-AD34.5-V0	Φ 34.5	29×34.5	55	120	25
PP-AD42.5-V0	Φ 42.5	36×42.5	65	150	25
PP-AD54.5-V0	Φ 54.5	48×54.5	80	190	25
PP-AD67.2-V0	Φ 67.2	56.3×67.2	130	270	25
PP-AD80.0-V0	Φ 80	66.5×80	170	350	25
PP-AD106.0-V0	Φ 106	91×106	225	450	25

双拼尼龙波纹管

Double stranded nylon corrugated pipe

品牌：蓝江/Land

材料：尼龙6

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

性能：双层软管设计,穿线便捷,韧性好,耐摩擦

应用：机床，照明，安防，轨道交通，机器人

Brand: Land

Material: nylon 6

Flame retardant: UL94V-2(Customizable V0)

Temperature:- 40°C-105°C

Performance: Double layered hose design, more flexible threading, good flexibility, and friction resistance

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



产品选型参数表

蓝江产品型号	软管规格	内径×外径	静态弯曲半径	包装数量
Product model	Conduit size	ID×OD	Stat.r	Packing
PN.	Φ mm	mm	mm	M/ring
WLK-DPA-AD10.0	AD10	8.8×13.5	15	50
WLK-DPA-AD11.0	AD11	11×16.1	15	50
WLK-DPA-AD14.0	AD14	13.2×18.7	20	50
WLK-DPA-AD16.0	AD16	16×21.5	20	50
WLK-DPA-AD20.0	AD20	20×25.7	25	50
WLK-DPA-AD23.0	AD23	23.9×31.3	35	50
WLK-DPA-AD29.0	AD29	27.3×35.5	35	50
WLK-DPA-AD37.0	AD37	32.5×43.2	40	25
WLK-DPA-AD45.0	AD45	43.1×54.2	70	25
WLK-DPA-AD70.0	AD70	67.0×79.8	95	10
WLK-DPA-AD100.0	AD100	92×106	100	10

尼龙12波纹管

Nylon12 flexible conduit

品牌：蓝江/Land

材料：尼龙12

阻燃：UL94V-2

温度：-40℃-105℃

性能：硬度高，表面光泽，耐摩擦，高机械强度

应用：机床，照明，安防，轨道交通，机械设备

Brand: Land


Material: Nylon 12

Flame retardant: UL94V-2

Temperature:- 40℃-105℃

Performance: High hardness, surface gloss, friction resistance, high mechanical strength

Applications: Machine tools, lighting, security access control, rail transit etc

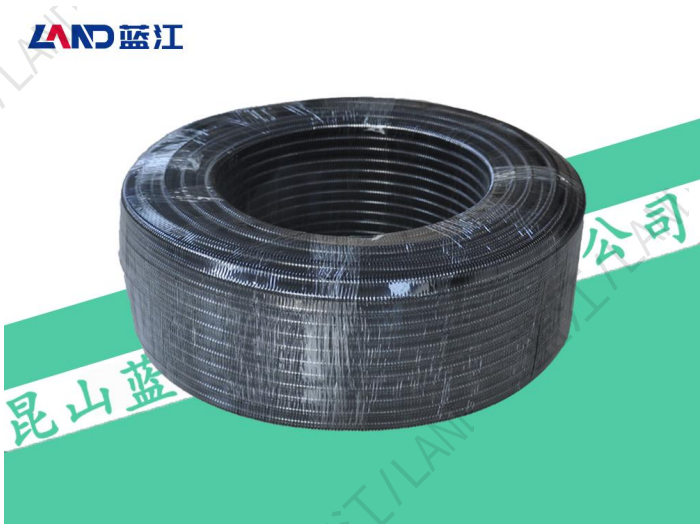

产品选型参数表

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半径	包装数量
Product model	Metric	ID×OD	Stat. r	Dyn. r	Packing
PN.	Φ mm	mm	mm	mm	M/ring
WLK-PA-AD10.0	Φ 10	6.5×10	15	35	100
WLK-PA-AD13.0	Φ 13	9.5×13	20	45	100
WLK-PA-AD15.8	Φ 15.8	12×15.8	25	55	100
WLK-PA-AD18.5	Φ 18.5	14.3×18.5	35	65	100
WLK-PA-AD21.2	Φ 21.2	17×21.2	40	75	100/50
WLK-PA-AD25.5	Φ 25.5	21×25.5	42	85	50
WLK-PA-AD28.5	Φ 28.5	23×28.5	45	100	50
WLK-PA-AD34.5	Φ 34.5	29×34.5	55	120	25
WLK-PA-AD42.5	Φ 42.5	36×42.5	65	150	25
WLK-PA-AD54.5	Φ 54.5	48×54.5	80	190	25
WLK-PA-AD67.2	Φ 67.2	56.3×67.2	130	270	25
WLK-PA-AD80.0	Φ 80	66.5×80	170	350	25
WLK-PA-AD106.0	Φ 106	91×106	225	450	25

防水波纹管接头/黑色

Waterproof hose connector/B

品牌: 蓝江/Land

LAND 蓝江

材料: 尼龙6

颜色: 黑色

阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

防水: IP68

环保: 符合ROHS2.0标准

性能: 拧紧式设计, 防水密封, 锁紧后抗拉力强

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人



Brand: Land

Material: Nylon 6

Color: black

Flame retardant: UL94V-2 (customizable V0)

Temperature: - 40°C-105°C

Waterproof: IP68

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Tightening design, waterproof sealing, strong tensile strength after locking

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



拧紧螺帽




夹紧圈



基本躯体



垫片 螺母

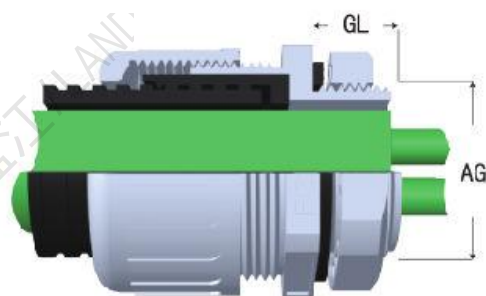

产品选型参数表/M

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	AG φ mm	φ mm	AG mm	GL mm	pcs
RQ-M12-AD10.0B	M12×1.5	12	AD10	12	9	50
RQ-M16-AD10.0B	M16×1.5	16	AD10	16	15	50
RQ-M16-AD13.0B	M16×1.5	16	AD13	16	15	50
RQ-M16-AD15.8B	M16×1.5	16	AD15.8	16	15	50
RQ-M16-AD18.5B	M16×1.5	16	AD18.5	16	15	50
RQ-M16-AD21.2B	M16×1.5	16	AD21.2	16	15	50
RQ-M20-AD13.0B	M20×1.5	20	AD13	20	15	50
RQ-M20-AD15.8B	M20×1.5	20	AD15.8	20	15	50
RQ-M20-AD18.5B	M20×1.5	20	AD18.5	20	15	50
RQ-M20-AD21.2B	M20×1.5	20	AD21.2	20	15	50
RQ-M22-AD15.8B	M22×1.5	22	AD15.8	22	10	50
RQ-M22-AD18.5B	M22×1.5	22	AD18.5	22	10	50
RQ-M25-AD15.8B	M25×1.5	25	AD15.8	25	12	50
RQ-M25-AD18.5B	M25×1.5	25	AD18.5	25	12	50
RQ-M25-AD21.2B	M25×1.5	25	AD21.2	25	15	50
RQ-M25-AD25.0B	M25×1.5	25	AD25	25	15	50
RQ-M25-AD28.5B	M25×1.5	25	AD28.5	25	15	50
RQ-M32-AD34.5B	M32×1.5	32	AD34.5	32	15	20
RQ-M40-AD42.5B	M40×1.5	40	AD42.5	40	15	10
RQ-M50-AD42.5B	M50×1.5	50	AD42.5	50	15	10
RQ-M50-AD54.5B	M50×1.5	50	AD54.5	50	26	10
RQ-M63-AD54.5B	M63×1.5	63	AD54.5	63	26	10

产品选型参数表/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	AG φ mm	φ mm	AG mm	GL mm	pcs
RQ-PG7-AD10.0B	PG7	12.5	AD10	12.5	9	50
RQ-PG9-AD10.0B	PG9	15.2	AD10	15.2	9	50
RQ-PG9-AD13.0B	PG9	15.2	AD13	15.2	9	50
RQ-PG11-AD13.0B	PG11	18.6	AD13	18.6	10	50
RQ-PG11-AD15.8B	PG11	18.6	AD15.8	18.6	10	50
RQ-PG11-AD18.5B	PG11	18.6	AD18.5	18.6	10	50
RQ-PG13.5-AD15.8B	PG13.5	20.4	AD15.8	20.4	10	50
RQ-PG13.5-AD18.5B	PG13.5	20.4	AD18.5	20.4	10	50
RQ-PG16-AD15.8B	PG16	22.5	AD15.8	22.5	11	50
RQ-PG16-AD18.5B	PG16	22.5	AD18.5	22.5	11	50
RQ-PG16-AD21.2B	PG16	22.5	AD21.2	22.5	11	50
RQ-PG21-AD21.2B	PG21	28.3	AD21.2	28.3	13	50
RQ-PG21-AD25.0B	PG21	28.3	AD25.0	28.3	13	50
RQ-PG21-AD28.5B	PG21	28.3	AD28.5	28.3	13	50
RQ-PG29-AD34.5B	PG29	37	AD34.5	37	13	20
RQ-PG36-AD42.5B	PG36	47	AD42.5	47	13	10
RQ-PG42-AD42.5B	PG42	54	AD42.5	54	15	10
RQ-PG48-AD54.5B	PG48	59.3	AD54.5	59.3	16	10
RQ-G1/4-AD10.0B	G1/4	13.13	AD10	13.15	9	50
RQ-G3/8-AD13.0B	G3/8	16.66	AD13	16.66	15	50
RQ-G1/2-AD15.8B	G1/2	20.95	AD15.8	20.95	15	50
RQ-G1/2-AD18.5B	G1/2	20.95	AD18.5	20.95	15	50
RQ-G1/2-AD21.2B	G1/2	20.95	AD21.2	20.95	15	50
RQ-G3/4-AD21.2B	G3/4	26.66	AD21.2	26.44	15	50
RQ-G3/4-AD25.0B	G3/4	26.66	AD25.0	26.44	15	50
RQ-G3/4-AD28.5B	G3/4	26.66	AD28.5	26.44	15	50
RQ-G1-AD34.5B	G1	33.2	AD34.5	33.2	15	20
RQ-G1-1/4-AD42.5B	G1-1/4	41.9	AD42.5	41.9	15	10
RQ-G1-1/2-AD42.5B	G1-1/2	47.8	AD42.5	47.8	15	10
RQ-G2-AD54.5B	G2	59.6	AD54.5	59.6	15	10

防水波纹管接头/灰白

Waterproof hose connector/G

品牌: 蓝江/Land

材料: 尼龙6

颜色: 灰白色

阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

防水: IP68

环保: 符合ROHS2.0标准

性能: 拧紧式设计, 防水密封, 锁紧后抗拉力强

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人

LAND 蓝江



Brand: Land

Material: Nylon 6

Color: gray white

Flame retardant: UL94V-2 (customizable V0)

Temperature: - 40°C-105°C

Waterproof: IP68

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Tightening design, waterproof sealing, strong tensile strength after locking

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



拧紧螺帽




夹紧圈



基本躯体



垫片 螺母

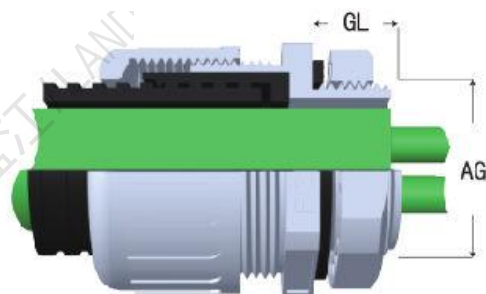

产品选型参数表/M

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	AG φ mm	φ mm	AG mm	GL mm	pcs
RQ-M12-AD10.0G	M12×1.5	12	AD10	12	9	50
RQ-M16-AD10.0G	M16×1.5	16	AD10	16	15	50
RQ-M16-AD13.0G	M16×1.5	16	AD13	16	15	50
RQ-M16-AD15.8G	M16×1.5	16	AD15.8	16	15	50
RQ-M16-AD18.5G	M16×1.5	16	AD18.5	16	15	50
RQ-M16-AD21.2G	M16×1.5	16	AD21.2	16	15	50
RQ-M20-AD13.0G	M20×1.5	20	AD13	20	15	50
RQ-M20-AD15.8G	M20×1.5	20	AD15.8	20	15	50
RQ-M20-AD18.5G	M20×1.5	20	AD18.5	20	15	50
RQ-M20-AD21.2G	M20×1.5	20	AD21.2	20	15	50
RQ-M22-AD15.8G	M22×1.5	22	AD15.8	22	10	50
RQ-M22-AD18.5G	M22×1.5	22	AD18.5	22	10	50
RQ-M25-AD15.8G	M25×1.5	25	AD15.8	25	12	50
RQ-M25-AD18.5G	M25×1.5	25	AD18.5	25	12	50
RQ-M25-AD21.2G	M25×1.5	25	AD21.2	25	15	50
RQ-M25-AD25.0G	M25×1.5	25	AD25	25	15	50
RQ-M25-AD28.5G	M25×1.5	25	AD28.5	25	15	50
RQ-M32-AD34.5G	M32×1.5	32	AD34.5	32	15	20
RQ-M40-AD42.5G	M40×1.5	40	AD42.5	40	15	10
RQ-M50-AD42.5G	M50×1.5	50	AD42.5	50	15	10
RQ-M50-AD54.5G	M50×1.5	50	AD54.5	50	26	10
RQ-M63-AD54.5G	M63×1.5	63	AD54.5	63	26	10

产品选型参数表/PG/G(PF)

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	AG φ mm	φ mm	AG mm	GL mm	pcs
RQ-PG7-AD10.0G	PG7	12.5	AD10	12.5	9	50
RQ-PG9-AD10.0G	PG9	15.2	AD10	15.2	9	50
RQ-PG9-AD13.0G	PG9	15.2	AD13	15.2	9	50
RQ-PG11-AD13.0G	PG11	18.6	AD13	18.6	10	50
RQ-PG11-AD15.8G	PG11	18.6	AD15.8	18.6	10	50
RQ-PG11-AD18.5G	PG11	18.6	AD18.5	18.6	10	50
RQ-PG13.5-AD15.8G	PG13.5	20.4	AD15.8	20.4	10	50
RQ-PG13.5-AD18.5G	PG13.5	20.4	AD18.5	20.4	10	50
RQ-PG16-AD15.8G	PG16	22.5	AD15.8	22.5	11	50
RQ-PG16-AD18.5G	PG16	22.5	AD18.5	22.5	11	50
RQ-PG16-AD21.2G	PG16	22.5	AD21.2	22.5	11	50
RQ-PG21-AD21.2G	PG21	28.3	AD21.2	28.3	13	50
RQ-PG21-AD25.0G	PG21	28.3	AD25.0	28.3	13	50
RQ-PG21-AD28.5G	PG21	28.3	AD28.5	28.3	13	50
RQ-PG29-AD34.5G	PG29	37	AD34.5	37	13	20
RQ-PG36-AD42.5G	PG36	47	AD42.5	47	13	10
RQ-PG42-AD42.5G	PG42	54	AD42.5	54	15	10
RQ-PG48-AD54.5G	PG48	59.3	AD54.5	59.3	16	10
RQ-G1/4-AD10.0G	G1/4	13.13	AD10	13.15	9	50
RQ-G3/8-AD13.0G	G3/8	16.66	AD13	16.66	15	50
RQ-G1/2-AD15.8G	G1/2	20.95	AD15.8	20.95	15	50
RQ-G1/2-AD18.5G	G1/2	20.95	AD18.5	20.95	15	50
RQ-G1/2-AD21.2G	G1/2	20.95	AD21.2	20.95	15	50
RQ-G3/4-AD21.2G	G3/4	26.66	AD21.2	26.44	15	50
RQ-G3/4-AD25.0G	G3/4	26.66	AD25.0	26.44	15	50
RQ-G3/4-AD28.5G	G3/4	26.66	AD28.5	26.44	15	50
RQ-G1-AD34.5G	G1	33.2	AD34.5	33.2	15	20
RQ-G1-1/4-AD42.5G	G1-1/4	41.9	AD42.5	41.9	15	10
RQ-G1-1/2-AD42.5G	G1-1/2	47.8	AD42.5	47.8	15	10
RQ-G2-AD54.5G	G2	59.6	AD54.5	59.6	15	10

不锈钢防水波纹管接头

Stainless steel waterproof hose connector

品牌: 蓝江/Land

LAND 蓝江

材料: 默认304, 可选316或316L

颜色: 银色

阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

防水: IP68

性能: 304不锈钢制成, 配合三元乙丙密封圈,

拧紧后密封波纹管且防护等级为IP68, 机械强度高

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人等



Brand: Land

Material: Default 304, optional 316 or 316L

Color: silvery

Flame retardant: UL94V-2 (customizable V0)

Temperature: - 40°C-105°C

Waterproof: IP68

Performance: Made of 304 stainless steel, combined with EPDM sealing ring, it seals the corrugated pipe after tightening and has a protection level of IP68. It has high mechanical strength and strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



迫紧螺帽




夹紧圈



基本躯体



垫片 螺母

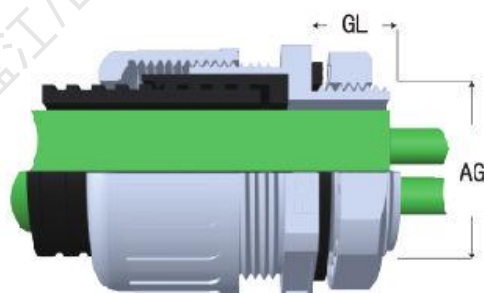

产品选型参数表/M

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	GL mm	pcs
RQ-M12-AD10.0-SS	M12×1.5	12	AD10	9	50
RQ-M12-AD13.0-SS	M12×1.5	12	AD13	9	50
RQ-M14-AD13.0-SS	M14×1.5	14	AD13	9	50
RQ-M16-AD10.0-SS	M16×1.5	16	AD10	9.5	50
RQ-M16-AD13.0-SS	M16×1.5	16	AD13	9.5	50
RQ-M16-AD15.8-SS	M16×1.5	16	AD15.8	9.5	50
RQ-M18-AD15.8-SS	M18×1.5	18	AD15.8	9.5	50
RQ-M20-AD13.0-SS	M20×1.5	20	AD13	12	50
RQ-M20-AD15.8-SS	M20×1.5	20	AD15.8	12	50
RQ-M20-AD18.5-SS	M20×1.5	20	AD18.5	12	50
RQ-M20-AD21.2-SS	M20×1.5	20	AD21.2	12	50
RQ-M22-AD15.8-SS	M22×1.5	22	AD15.8	12	50
RQ-M22-AD18.5-SS	M22×1.5	22	AD18.5	12	50
RQ-M22-AD21.2-SS	M22×1.5	22	AD21.2	12	50
RQ-M24-AD15.8-SS	M24×1.5	24	AD15.8	12	50
RQ-M24-AD18.5-SS	M24×1.5	24	AD18.5	12	50
RQ-M24-AD21.2-SS	M24×1.5	24	AD21.2	12	50
RQ-M25-AD15.8-SS	M25×1.5	25	AD15.8	12	50
RQ-M25-AD18.5-SS	M25×1.5	25	AD8.5	12	50
RQ-M25-AD21.2-SS	M25×1.5	25	AD21.2	12	50
RQ-M25-AD25.0-SS	M25×1.5	25	AD25	12	50
RQ-M25-AD28.5-SS	M25×1.5	25	AD28.5	12	50
RQ-M27-AD28.5-SS	M27×1.5	27	AD28.5	12	50
RQ-M30-AD28.5-SS	M30×1.5	30	AD28.5	12	50
RQ-M32-AD28.5-SS	M32×1.5	32	AD28.5	12.5	20
RQ-M32-AD34.5-SS	M32×1.5	32	AD34.5	12.5	20
RQ-M40-AD34.5-SS	M40×1.5	40	AD34.5	14	10
RQ-M40-AD42.5-SS	M40×1.5	40	AD42.5	14	10
RQ-M50-AD42.5-SS	M50×1.5	50	AD42.5	15	10
RQ-M50-AD54.5-SS	M50×1.5	50	AD54.5	15	10
RQ-M63-AD54.5-SS	M63×1.5	63	AD54.5	15	10

产品选型参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	GL mm	pcs
RQ-G1/4-AD10.0-SS	G1/4	13.15	AD10	9	50
RQ-G1/4-AD13.0-SS	G1/4	13.15	AD13	9	50
RQ-G3/8-AD13.0-SS	G3/8	16.66	AD13	9.5	50
RQ-G3/8-AD15.8-SS	G3/8	16.66	AD15.8	9.5	50
RQ-G1/2-AD15.8-SS	G1/2	20.99	AD15.8	12	50
RQ-G1/2-AD18.5-SS	G1/2	20.99	AD18.5	12	50
RQ-G1/2-AD21.2-SS	G1/2	20.99	AD21.2	12	50
RQ-G3/4-AD21.2-SS	G3/4	26.44	AD21.2	12	50
RQ-G3/4-AD25.0-SS	G3/4	26.44	AD25.0	12	50
RQ-G3/4-AD28.5-SS	G3/4	26.44	AD28.5	12	50
RQ-G1-AD28.5-SS	G1	33.25	AD28.5	15	20
RQ-G1-AD34.5-SS	G1	33.25	AD34.5	15	20
RQ-G1-1/4-AD42.5-SS	G1-1/4	41.91	AD42.5	15	10
RQ-G1-1/2-AD42.5-SS	G1-1/2	47.8	AD42.5	15	10
RQ-G1-1/2-AD54.5-SS	G1-1/2	47.8	AD54.5	15	10
RQ-G2-AD54.5-SS	G2	59.61	AD54.5	15	10
RQ-NPT1/4-AD10.0-SS	NPT1/4	13.15	AD10	9	50
RQ-NPT1/4-AD13.0-SS	NPT1/4	13.15	AD13	9	50
RQ-NPT3/8-AD13.0-SS	NPT3/8	17.05	AD13	9.5	50
RQ-NPT3/8-AD15.8-SS	NPT3/8	17.05	AD15.8	9.5	50
RQ-NPT1/2-AD15.8-SS	NPT1/2	20.99	AD15.8	12	50
RQ-NPT1/2-AD18.5-SS	NPT1/2	20.99	AD18.5	12	50
RQ-NPT1/2-AD21.2-SS	NPT1/2	20.99	AD21.2	12	50
RQ-NPT3/4-AD21.2-SS	NPT3/4	26.56	AD21.2	12	50
RQ-NPT3/4-AD25.0-SS	NPT3/4	26.56	AD25.0	12	50
RQ-NPT3/4-AD28.5-SS	NPT3/4	26.56	AD28.5	12	50
RQ-NPT1-AD28.5-SS	NPT1	33.25	AD28.5	15	20
RQ-NPT1-AD34.5-SS	NPT1	33.25	AD34.5	15	20
RQ-NPT1-1/4-AD42.5-SS	NPT1-1/4	41.98	AD42.5	15	10
RQ-NPT1-1/2-AD42.5-SS	NPT1-1/2	48.05	AD42.5	15	10
RQ-NPT1-1/2-AD54.5-SS	NPT1-1/2	48.05	AD54.5	15	10
RQ-NPT2-AD54.5-SS	NPT2	60.09	AD54.5	15	10

铜镀镍防水波纹管接头

Nickel Plated Brass waterproof hose connector

品牌: 蓝江/Land

材料: 黄铜镀镍

颜色: 银色

阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

防水: IP68

性能: 黄铜镀镍制成, 配合三元乙丙密封圈, 拧紧后密封波纹管且防护等级为IP68, 机械强度高

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人等

LAND 蓝江



Brand: Land

Material: Nickel plated brass

Color: silvery

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Waterproof: IP68

Performance: Made of nickel plated brass, combined with EPDM sealing ring, it seals the corrugated pipe after tightening and has a protection level of IP68. It has high mechanical strength and strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



迫紧螺帽



夹紧圈




基本躯体



垫片



螺母

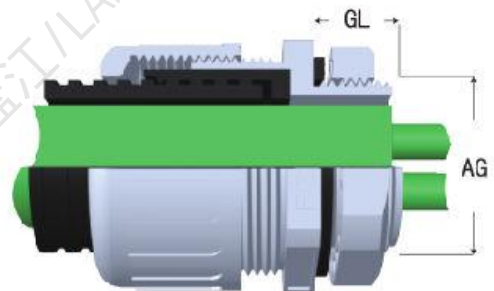

产品选型参数表

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	GL mm	pcs
RQ-M12A-AD10.0	M12×1.5	12	AD10	9	50
RQ-M12A-AD13.0	M12×1.5	12	AD13	9	50
RQ-M16A-AD13.0	M16×1.5	16	AD13	9.5	50
RQ-M16A-AD15.8	M16×1.5	16	AD15.8	9.5	50
RQ-M20A-AD15.8	M20×1.5	20	AD15.8	12	50
RQ-M20A-AD18.5	M20×1.5	20	AD18.5	12	50
RQ-M20A-AD21.2	M20×1.5	20	AD21.2	12	50
RQ-M25A-AD21.2	M25×1.5	25	AD21.2	12	50
RQ-M25A-AD25.0	M25×1.5	25	AD25	12	50
RQ-M25A-AD28.5	M25×1.5	25	AD28.5	12	50
RQ-M32A-AD28.5	M32×1.5	32	AD28.5	12.5	20
RQ-M32A-AD34.5	M32×1.5	32	AD34.5	12.5	20
RQ-M40A-AD34.5	M40×1.5	40	AD34.5	14	10
RQ-M40A-AD42.5	M40×1.5	40	AD42.5	14	10
RQ-M50A-AD42.5	M50×1.5	50	AD42.5	15	10
RQ-M50A-AD54.5	M50×1.5	50	AD54.5	15	10
RQ-M63A-AD54.5	M63×1.5	63	AD54.5	15	10
RQ-G1/4A-AD10.0	G1/4	13.15	AD10	9	50
RQ-G1/4A-AD13.0	G1/4	13.15	AD13	9	50
RQ-G3/8A-AD15.8	G3/8	16.66	AD15.8	9.5	50
RQ-G1/2A-AD15.8	G1/2	20.99	AD15.8	12	50
RQ-G1/2A-AD18.5	G1/2	20.99	AD18.5	12	50
RQ-G1/2A-AD21.2	G1/2	20.99	AD21.2	12	50
RQ-G3/4A-AD21.2	G3/4	26.44	AD21.2	12	50
RQ-G3/4A-AD25.0	G3/4	26.44	AD25.0	12	50
RQ-G3/4A-AD28.5	G3/4	26.44	AD28.5	12	50
RQ-G1A-AD34.5	G1	33.25	AD34.5	15	20
RQ-G1-1/4A-AD42.5	G1-1/4	41.91	AD42.5	15	10
RQ-G1-1/2A-AD42.5	G1-1/2	47.8	AD42.5	15	10
RQ-G1-1/2A-AD54.5	G1-1/2	47.8	AD54.5	15	10
RQ-G2A-AD54.5	G2	59.61	AD54.5	15	10

标准防水波纹管弯头

Standard Waterproof hose elbow

品牌：蓝江/Land

材料：尼龙6

颜色：默认黑色，可选灰白色

温度：-40°C-105°C

认证：符合ROHS2.0与IP68

性能：90度拧紧式设计，防水密封，锁紧后抗拉力强

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6

Color: default black, optional gray white

Temperature:- 40°C-105°C

Certification: Compliant with ROHS2.0 and IP68

Performance: Tightening design, waterproof sealing, strong tensile strength after locking

Applications: Machine tools, lighting, security access control, rail transit, robots, etc

产品选型参数表

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RQW-M16-AD13.0	M16×1.5	16	AD13	16	15	50
RQW-M20-AD15.8	M20×1.5	20	AD15.8	20	15	50
RQW-M20-AD18.5	M20×1.5	20	AD18.5	20	15	50
RQW-M20-AD21.2	M20×1.5	20	AD21.2	20	15	50
RQW-M25-AD21.2	M25×1.5	25	AD21.2	25	15	50
RQW-M25-AD25.0	M25×1.5	25	AD25	25	15	50
RQW-M25-AD28.5	M25×1.5	25	AD28.5	25	15	50
RQW-M32-AD34.5	M32×1.5	32	AD34.5	32	15	20
RQW-M40-AD42.5	M40×1.5	40	AD42.5	40	15	10

弧形防水波纹管弯头

Curved waterproof hose elbow

品牌：蓝江/Land

材料：尼龙6

颜色：默认黑色，可选灰白色

温度：-40℃-105℃

认证：符合ROHS2.0与IP68

性能：90度弧形拧紧式设计，防水密封

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6

Color: default black, optional gray white

Temperature:- 40℃-105℃

Certification: Compliant with ROHS2.0 and IP68

Performance: 90 degree curved tightening design, waterproof sealing, easy installation

Applications: Machine tools, lighting, security access control, rail transit, robots

产品选型参数表

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RQHW-M16-AD13.0	M16×1.5	16	AD13	16	15	50
RQHW-M20-AD15.8	M20×1.5	20	AD15.8	20	15	50
RQHW-M20-AD18.5	M20×1.5	20	AD18.5	20	15	50
RQHW-M20-AD21.2	M20×1.5	20	AD21.2	20	15	50
RQHW-M25-AD21.2	M25×1.5	25	AD21.2	25	15	50
RQHW-M25-AD25.0	M25×1.5	25	AD25	25	15	50
RQHW-M25-AD28.5	M25×1.5	25	AD28.5	25	15	50
RQHW-M32-AD34.5	M32×1.5	32	AD34.5	32	15	20
RQHW-M40-AD42.5	M40×1.5	40	AD42.5	40	15	10

内螺纹防水波纹管接头

Internal thread waterproof hose connector

品牌：蓝江/Land



材料：尼龙6，黑色

认证：符合ROHS2.0与IP68

性能：内螺纹防水密封设计，锁紧软管防水密封

应用：机床，照明，安防门禁，轨道交通，机器人

Brand: Land

Material: Nylon 6, Black

Authentication: Compliant with ROHS2.0 and IP68

Performance: Internal thread waterproof sealing design, locking hose and sealing waterproof

Applications: Machine tools, lighting, security access control, rail transit, robots



产品选型参数表

蓝江产品型号	螺纹规格	适配软管	螺纹长度	包装数量
Product model	Thread size	Adapt hose	Thread length	Packing
PN.	Metric	Φ mm	GL mm	pcs
RQF-M16-AD10.0	M16×1.5	AD10	9	50
RQF-M20-AD13.0	M20×1.5	AD13	12	50
RQF-M20-AD15.8	M20×1.5	AD15.8	12	50
RQF-M25-AD21.2	M25×1.5	AD21.2	13	50
RQF-M30-AD28.5	M30×2.0	AD28.5	16	50
RQF-M32-AD34.5	M32×1.5	AD34.5	16	20
RQF-M47-AD42.5	M47×2.0	AD42.5	24	10
RQF-G1/2-AD15.8	G1/2	AD15.8	15	50
RQF-G1/2-AD18.5	G1/2	AD18.5	15	50
RQF-G1/2-AD21.2	G1/2	AD21.2	15	50
RQF-G3/4-AD21.2	G3/4	AD21.2	15	50
RQF-G3/4-AD25.0	G3/4	AD25.0	15	50
RQF-G3/4-AD28.5	G3/4	AD28.5	15	50
RQF-G1-AD34.5	G1	AD34.5	15	20
RQF-G1-1/2-AD42.5	G1-1/2	AD42.5	15	10

加长内螺纹防水波纹管接头

Extended internal thread waterproof hose connector

品牌：蓝江/Land



材料：尼龙6，黑色

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

认证：符合ROHS2.0与IP68

性能：加长内螺纹防水密封设计，锁紧软管防水

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6, Black

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Authentication: Compliant with ROHS2.0 and IP68

Performance: Extended internal thread waterproof sealing design, locking hose and waterproof

Applications: Machine tools, lighting, security access control, rail transit, robots

产品选型参数表

蓝江产品型号	螺纹规格	适配软管	螺纹长度	包装数量
Product model	Thread size	Adapt hose	Thread length	Packing
PN.	Metric	Φ mm	GL mm	pcs
RQF-M20L-AD13.0	M20×1.5	AD13.0	17	50
RQF-M25L-AD15.8	M25×1.5	AD15.8	17	50
RQF-M25L-AD18.5	M25×1.5	AD18.5	17	50

拧紧密封波纹管接头

Tighten the sealed hose connector

品牌：蓝江/Land

材料：尼龙6

温度：-40℃-105℃

应用：机床，照明，安防门禁，轨道交通，机器人

Brand: Land

Material: Nylon 6

Temperature:- 40℃-105℃

Applications: Machine tools, lighting, security access control, rail transit, robots



产品尺寸表

蓝江产品型号	螺纹规格	适配软管	螺纹直径	螺纹长度	包装
Product model	Thread size	Adapt Hose	Thread diameter	Thread length	packing
PN.	Metric	Φ mm	AG mm	GL mm	pcs
RF-M12-AD13.0	M12×1.5	AD13	12	10	100
RF-M16-AD13.0	M16×1.5	AD13	16	10	100
RF-M16-AD15.8	M16×1.5	AD15.8	16	10	100
RF-M18-AD13.0	M16×1.5	AD13	18	10	100
RF-M18-AD15.8	M16×1.5	AD15.8	18	10	100
RF-M20-AD15.8	M20×1.5	AD15.8	20	10	50
RF-M20-AD18.5	M20×1.5	AD18.5	20	10	50
RF-M20-AD21.2	M20×1.5	AD21.2	20	10	50
RF-M24-AD21.2	M24×1.5	AD21.2	24	10	50
RF-M25-AD21.2	M25×1.5	AD21.2	25	10	50
RF-M25-AD25.0	M25×1.5	AD25	25	14	50
RF-M25-AD28.5	M25×1.5	AD28.5	25	14	50
RF-M27-AD28.5	M27×2.0	AD28.5	27	14	50
RF-M30-AD28.5	M30×2.0	AD28.5	30	14	50
RF-M32-AD28.5	M32×1.5	AD28.5	32	14	20
RF-M32-AD34.5	M32×1.5	AD34.5	32	14	20
RF-M40-AD42.5	M40×1.5	AD42.5	40	14	10
RF-M42-AD42.5	M42×2.0	AD42.5	42	14	10
RF-M48-AD42.5	M48×2.0	AD42.5	48	14	10
RF-M50-AD54.5	M50×1.5	AD54.5	50	14	10
RF-M60-AD54.5	M60×2.0	AD54.5	60	15	10
RF-M63-AD54.5	M63×1.5	AD54.5	63	15	10

快速波纹管接头

Quick hose connector

品牌: 蓝江/Land

材料: 尼龙6

颜色: 默认黑色, 可选灰白色

阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

环保: 符合ROHS2.0标准

性能: 快速连接软管, 抗拉力强, 安装高效便捷

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人

LAND 蓝江



Brand: Land

Material: Nylon 6

Color: default black, optional gray white


Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Quick connect hose, strong tensile strength, efficient and convenient installation

Applications: Machine tools, lighting, security access control, rail transit, robots, etc

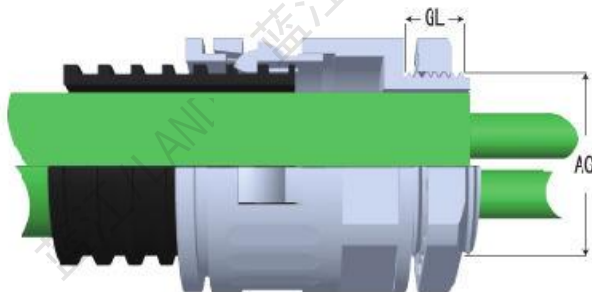

产品选型参数表/M

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RK-M10-AD10.0	M10×1.5	10	AD10	10	10	50
RK-M12-AD10.0	M12×1.5	12	AD10	12	10	50
RK-M12-AD13.0	M12×1.5	12	AD10	12	10	50
RK-M16-AD13.0	M16×1.5	16	AD13	16	10	50
RK-M16-AD15.8	M16×1.5	16	AD15.8	16	10	50
RK-M18-AD13.0	M18×1.5	18	AD13	16	10	50
RK-M18-AD15.8	M18×1.5	18	AD15.8	16	12	50
RK-M20-AD13.0	M20×1.5	20	AD13	20	10	50
RK-M20-AD15.8	M20×1.5	20	AD15.8	20	12	50
RK-M20-AD18.5	M20×1.5	20	AD18.5	20	12	50
RK-M20-AD21.2	M20×1.5	20	AD21.2	20	13	50
RK-M22-AD18.5	M22×1.5	22	AD18.5	22	12	50
RK-M22-AD21.2	M22×1.5	22	AD21.2	22	13	50
RK-M24-AD21.2	M24×1.5	24	AD21.2	22	13	50
RK-M25-AD21.2	M25×1.5	25	AD21.2	25	13	50
RK-M25-AD25.0	M25×1.5	25	AD25	25	13	50
RK-M25-AD28.5	M25×1.5	25	AD28.5	25	13	50
RK-M27-AD28.5	M27×1.5	27	AD28.5	25	13	50
RK-M30-AD28.5	M30×1.5/2	30	AD28.5	25	13	50
RK-M32-AD28.5	M32×1.5	32	AD28.5	32	13	20
RK-M32-AD34.5	M32×1.5	32	AD34.5	32	14	20
RK-M36-AD34.5	M36×1.5/2	36	AD34.5	32	14	10
RK-M40-AD34.5	M40×1.5	40	AD34.5	40	14	10
RK-M40-AD42.5	M40×1.5	40	AD42.5	40	15	10
RK-M42-AD42.5	M42×1.5	42	AD42.5	40	15	10
RK-M48-AD42.5	M48×1.5/2	48	AD42.5	40	15	10
RK-M50-AD42.5	M50×1.5	50	AD42.5	50	15	10
RK-M50-AD54.5	M50×1.5	50	AD54.5	50	16	10
RK-M60-AD54.5	M60×1.5	60	AD54.5	63	16	10
RK-M63-AD54.5	M63×1.5	63	AD54.5	63	16	10
RK-M64-AD54.5	M64×2.0	64	AD54.5	63	16	10

产品选型参数表/PG/G (PF)

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RK-PG7-AD10.0	PG7	12.5	AD10	12.5	10	50
RK-PG9-AD13.0	PG9	15.2	AD13	15.2	10	50
RK-PG11-AD15.8	PG11	18.6	AD15.8	18.6	12	50
RK-PG13.5-AD18.5	PG13.5	20.4	AD18.5	20.4	12	50
RK-PG16-AD21.2	PG16	22.5	AD21.2	22.5	13	50
RK-PG21-AD25.0	PG21	28.3	AD25.0	28.3	13	50
RK-PG21-AD28.5	PG21	28.3	AD28.5	28.3	13	50
RK-PG29-AD34.5	PG29	37	AD34.5	37	14	20
RK-PG36-AD42.5	PG36	47	AD42.5	47	15	20
RK-PG42-AD54.5	PG42	54	AD54.5	54	16	10
RK-PG48-AD54.5	PG48	59.3	AD54.5	59.3	16	10
RK-G1/4-AD10.0	G1/4	13.15	AD10	13.15	10	50
RK-G3/8-AD15.8	G3/8	16.66	AD15.8	16.66	10	50
RK-G1/2-AD15.8	G1/2	20.95	AD15.8	20.95	12	50
RK-G1/2-AD18.5	G1/2	20.95	AD18.5	20.95	12	50
RK-G1/2-AD21.2	G1/2	20.95	AD21.2	20.95	13	50
RK-G3/4-AD25.0	G3/4	26.66	AD25.0	26.44	13	50
RK-G3/4-AD28.5	G3/4	26.66	AD28.5	26.44	13	50
RK-G1-AD34.5	G1	33.2	AD34.5	33.2	14	20
RK-G1-1/4-AD42.5	G1-1/4	41.9	AD42.5	41.9	15	20
RK-G1-1/2-AD42.5	G1-1/2	47.8	AD42.5	47.8	15	10
RK-G1-1/2-AD54.5	G1-1/2	47.8	AD54.5	47.8	16	10
RK-G2-AD54.5	G2	59.6	AD54.5	59.6	16	10

快速波纹管弯头

Quick hose elbow

品牌：蓝江/Land

材料：尼龙6

颜色：默认黑色，可选灰白色

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：快速连接软管，抗拉力强，安装高效便捷

应用：机床，照明，安防门禁，轨道交通，机器人等

LAND 蓝江



Brand: Land

Material: Nylon 6

Color: default black, optional gray white


Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Quick connect hose, strong tensile strength, efficient and convenient installation

Applications: Machine tools, lighting, security access control, rail transit, robots, etc

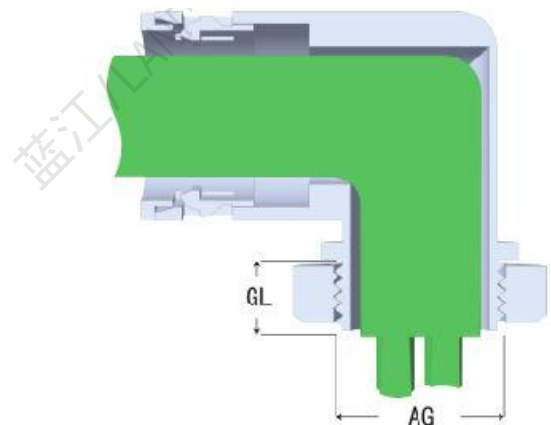

产品选型参数表/M

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RW-M12-AD10.0	M12×1.5	12	AD10	12	10	50
RW-M12-AD13.0	M12×1.5	12	AD10	12	10	50
RW-M16-AD13.0	M16×1.5	16	AD13	16	10	50
RW-M16-AD15.8	M16×1.5	16	AD15.8	16	10	50
RW-M18-AD13.0	M18×1.5	18	AD13	16	10	50
RW-M18-AD15.8	M18×1.5	18	AD15.8	16	12	50
RW-M20-AD13.0	M20×1.5	20	AD13	20	10	50
RW-M20-AD15.8	M20×1.5	20	AD15.8	20	12	20
RW-M20-AD18.5	M20×1.5	20	AD18.5	20	12	20
RW-M20-AD21.2	M20×1.5	20	AD21.2	20	13	10
RW-M24-AD21.2	M24×1.5	24	AD18.5	22	13	10
RW-M25-AD21.2	M25×1.5	25	AD21.2	25	13	50
RW-M25-AD25.0	M25×1.5	25	AD25	25	13	50
RW-M25-AD28.5	M25×1.5	25	AD28.5	25	13	50
RW-M27-AD28.5	M27×1.5	27	AD28.5	25	13	50
RW-M30-AD28.5	M30×1.5/2	30	AD28.5	25	13	50
RW-M32-AD34.5	M32×1.5	32	AD34.5	32	14	50
RW-M36-AD34.5	M36×1.5/2	36	AD34.5	32	14	50
RW-M40-AD34.5	M40×1.5	40	AD42.5	40	14	20
RW-M40-AD42.5	M40×1.5	40	AD42.5	40	15	20
RW-M48-AD42.5	M48×1.5/2	48	AD42.5	40	15	10
RW-M50-AD54.5	M50×1.5	50	AD54.5	50	16	10
RW-M60-AD54.5	M60×1.5	60	AD54.5	63	16	10
RW-M63-AD54.5	M63×1.5	63	AD54.5	63	16	10

产品选型参数表/PG/G (PF)

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RW-PG7-AD10.0	PG7	12.5	AD10	12.5	10	50
RW-PG9-AD13.0	PG9	15.2	AD13	15.2	10	50
RW-PG11-AD15.8	PG11	18.6	AD15.8	18.6	12	50
RW-PG13.5-AD18.5	PG13.5	20.4	AD18.5	20.4	12	50
RW-PG16-AD21.2	PG16	22.5	AD21.2	22.5	13	50
RW-PG21-AD28.5	PG21	28.3	AD28.5	28.3	13	50
RW-PG29-AD34.5	PG29	37	AD34.5	37	14	20
RW-PG36-AD42.5	PG36	47	AD42.5	47	15	10
RW-PG42-AD54.5	PG42	54	AD54.5	54	16	10
RW-PG48-AD54.5	PG48	59.3	AD54.5	59.3	16	10
RW-G1/4-AD10.0	G1/4	13.15	AD10	13.15	10	50
RW-G3/8-AD15.8	G3/8	16.66	AD15.8	16.66	10	50
RW-G1/2-AD15.8	G1/2	20.95	AD15.8	20.95	12	50
RW-G1/2-AD18.5	G1/2	20.95	AD18.5	20.95	12	50
RW-G1/2-AD21.2	G1/2	20.95	AD21.2	20.95	13	50
RW-G3/4-AD28.5	G3/4	26.66	AD28.5	26.44	13	50
RW-G1-AD34.5	G1	33.2	AD34.5	33.2	14	20
RW-G1-1/4-AD42.5	G1-1/4	41.9	AD42.5	41.9	15	10
RW-G1-1/2-AD42.5	G1-1/2	47.8	AD42.5	47.8	15	10
RW-G1-1/2-AD42.5	G1-1/2	47.8	AD54.5	47.8	16	10
RW-G2-AD54.5	G2	59.6	AD54.5	59.6	16	10

金属螺纹快速波纹管接头

Metal thread quick hose connector

品牌: 蓝江/Land



材料: 尼龙6/黄铜镀镍

阻燃: UL94V-0

温度: -40°C-105°C

性能: 本体采用优质尼龙, 螺纹部分为黄铜镀镍制成, 具有螺纹连接强度高, 快速锁紧软管, 使用便捷高效

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人



Brand: Land

Material: Nylon 6/brass nickel plating

Flame retardant: UL94V-0

Temperature:- 40°C-105°C

Performance: The body is made of high-quality nylon, and the threaded part is made of nickel plated brass, which has high thread connection strength, quick locking of hoses, and convenient and efficient use

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



产品选型参数表

蓝江产品型号	螺纹规格	建议开孔	适配软管	螺纹直径	螺纹长度	包装
Product model	Thread size	Hole size	Adapt hose	Thread diameter	Thread length	Packing
PN.	Metric	Φ mm	Φ mm	AG mm	GL mm	pcs
RKG-M16-AD13.0	M16×1.5	16	AD13	16	12	50
RKG-M16-AD15.8	M16×1.5	16	AD15.8	16	12	50
RKG-M20-AD15.8	M20×1.5	20	AD15.8	20	13	50
RKG-M20-AD21.2	M20×1.5	20	AD21.2	20	13	50
RKG-M25-AD21.2	M25×1.5	25	AD21.2	25	13	50
RKG-M25-AD28.5	M25×1.5	25	AD28.5	25	13	50
RKG-M32-AD34.5	M32×1.5	32	AD34.5	32	14	20
RKG-M40-AD42.5	M40×1.5	40	AD42.5	40	17	20
RKG-M50-AD54.5	M50×1.5	50	AD54.5	50	17	10
RKG-M63-AD54.5	M63×1.5	63	AD54.5	63	17	10
RKG-G3/8-AD13.0	G3/8	16.66	AD13	16.66	12	50
RKG-G3/8-AD15.8	G3/8	16.66	AD15.8	16.66	12	50
RKG-G1/2-AD15.8	G1/2	20.95	AD15.8	20.95	13	50
RKG-G1/2-AD21.2	G1/2	20.95	AD21.2	20.95	13	50
RKG-G3/4-AD21.2	G3/4	26.66	AD21.2	26.44	13	50
RKG-G3/4-AD28.5	G3/4	26.66	AD28.5	26.44	13	50
RKG-G1-AD34.5	G1	33.2	AD34.5	33.2	14	20
RKG-G1-1/4-AD42.5	G1-1/4	41.9	AD42.5	41.9	15	10
RKG-G1-1/2-AD42.5	G1-1/2	47.8	AD42.5	47.8	15	10
RKG-G2-AD54.5	G2	59.3	AD54.5	59.3	16	10
RKG-PG11-AD13.0	PG11	18.6	AD13	18.6	12	50
RKG-PG11-AD15.8	PG11	18.6	AD15.8	18.6	12	50
RKG-PG16-AD15.8	PG16	22.5	AD15.8	22.5	13	50
RKG-PG16-AD21.2	PG16	22.5	AD21.2	22.5	13	50
RKG-PG21-AD21.2	PG21	28.3	AD21.2	28.3	13	50
RKG-PG21-AD28.5	PG21	28.3	AD28.5	28.3	13	50
RKG-PG29-AD34.5	PG29	37	AD34.5	37	14	20
RKG-PG36-AD42.5	PG36	47	AD42.5	47	15	10
RKG-PG42-AD42.5	PG42	54	AD42.5	54	15	10
RKG-PG48-AD54.5	PG48	59.3	AD54.5	59.3	16	10

内螺纹快速波纹管接头

Internal thread quick hose connector

品牌: 蓝江/Land

材料: 尼龙6

颜色: 默认黑色, 可选灰白色

阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

环保: 符合ROHS2.0标准

性能: 内螺纹快速连接软管, 抗拉力强, 安装高效便捷

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人

Brand: Land

Material: Nylon 6

Color: default black, optional gray white

Flame retardant: UL94V-2 (customizable V0)

Temperature: - 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Internal thread quick connect hose, strong tensile strength, efficient and convenient installation

Applications: Machine tools, lighting, security access control, rail transit, robots, etc


LAND 蓝江



卡扣



主体

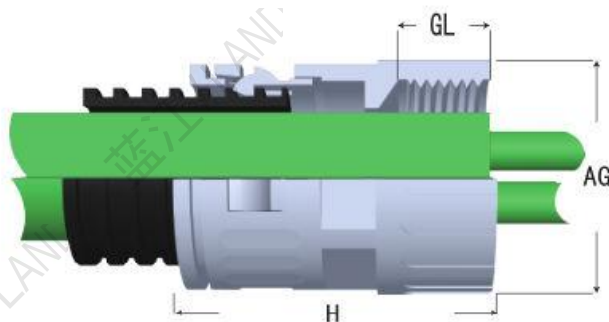

产品选型参数表

蓝江产品型号	螺纹规格	适配软管	螺纹长度	包装数量
Product model	Thread size	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	GL mm	Pcs/bag
RKF-M12-AD10.0	M12×1.5	AD10	10	50
RKF-M16-AD13.0	M16×1.5	AD13	13	50
RKF-M16-AD15.8	M16×1.5	AD15.8	13	50
RKF-M20-AD15.8	M20×1.5	AD15.8	13.5	50
RKF-M20-AD18.5	M20×1.5	AD18.5	13.5	50
RKF-M20-AD21.2	M20×1.5	AD21.2	13.5	50
RKF-M22-AD18.5	M22×1.5	AD18.5	14	50
RKF-M25-AD21.2	M25×1.5	AD21.2	15	50
RKF-M25-AD28.5	M25×1.5	AD28.5	15	50
RKF-M30-AD25.0	M30×1.5	AD25	15	50
RKF-M30-AD28.5	M30×1.5	AD28.5	15	50
RKF-M32-AD34.5	M32×1.5	AD34.5	17	20
RKF-M40-AD42.5	M40×1.5	AD42.5	17	10
RKF-M50-AD54.5	M50×1.5	AD54.5	17	10
RKF-M63-AD54.5	M63×1.5	AD54.5	20	10
RKF-G1/4-AD10.0	G1/4	AD10	10	50
RKF-G3/8-AD13.0	G3/8	AD13.0	13	50
RKF-G3/8-AD15.8	G3/8	AD15.8	13	50
RKF-G1/2-AD15.8	G1/2	AD15.8	13.5	50
RKF-G1/2-AD18.5	G1/2	AD18.5	13.5	50
RKF-G1/2-AD21.2	G1/2	AD21.2	13.5	50
RKF-G3/4-AD21.2	G3/4	AD21.2	15	50
RKF-G3/4-AD25.0	G3/4	AD25.0	15	50
RKF-G3/4-AD28.5	G3/4	AD28.5	15	50
RKF-G1-AD28.5	G1	AD28.5	15	50
RKF-G1-AD34.5	G1	AD34.5	17	20
RKF-G1-1/4-AD34.5	G1-1/4	AD34.5	17	20
RKF-G1-1/4-AD42.5	G1-1/4	AD42.5	17	10
RKF-G1-1/2-AD42.5	G1-1/2	AD42.5	28.5	10
RKF-G1-1/2-AD54.5	G1-1/2	AD54.5	28.5	10
RKF-G2-AD54.5	G2	AD54.5	28.5	10

弧形90度快速弯头

Curved 90 degree quick bend

品牌：蓝江/Land

材料：尼龙6

颜色：默认黑色，可选灰白色

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：90度弧形弯角设计，穿线方便，锁管便捷

应用：机床，照明，安防门禁，轨道交通，机器人

LAND 蓝江



Brand: Land

Material: Nylon 6

Color: default black, optional gray white


Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance:90 degree curved angle design, easy to thread and lock tube

Applications: Machine tools, lighting, security access control, rail transit, robots

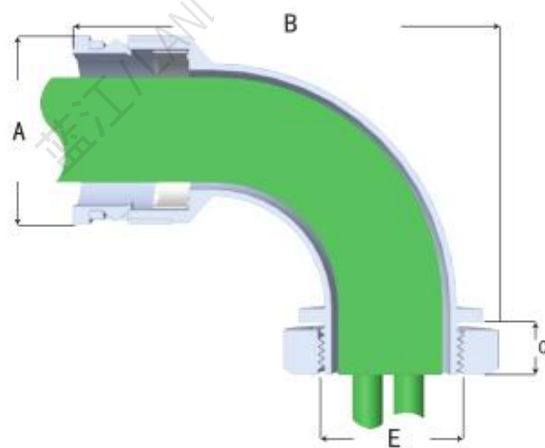

产品选型参数表

蓝江产品型号	螺纹规格	适配软管	产品尺寸					
Product model	Thread size	Adapt hose	Product size					
PN.	Metric	Φ mm	I.D.	A	B	C	D	E
RKHW-M10-AD10.0	M10×1.5	AD10	7	17.5	46	8	17	10
RKHW-M12-AD13.0	M12×1.5	AD10	9	20.5	53.3	10.2	19	12
RKHW-M16-AD15.8	M16×1.5	AD15.8	13	23	60	10.3	22.5	16
RKHW-M20-AD18.5	M20×1.5	AD18.5	16.5	28	70	12.2	26	20
RKHW-M20-AD21.2	M20×1.5	AD21.2	15.3	30	72	12	26.2	20
RKHW-M25-AD25.0	M25×1.5	AD25	21	34	82	12.2	28	25
RKHW-M25-AD28.5	M25×1.5	AD28.5	21	37	81	12.3	29.9	25
RKHW-M32-AD34.5	M32×1.5	AD34.5	28	44	95	14.9	37.2	32
RKHW-M40-AD42.5	M40×1.5	AD42.5	35.2	53	107.5	12.2	41.8	40
RKHW-M50-AD54.5	M50×1.5	AD54.5	44.5	66.5	120	14.7	46.1	50
RKHW-PG7-AD10.0	PG7	AD10	7.5	17.5	46	8	16.5	12.3
RKHW-PG9-AD13.0	PG9	AD13	11	20.5	56	10.2	18.8	15
RKHW-PG11-AD15.8	PG11	AD15.8	13.5	23	60.5	10.2	22.6	18.6
RKHW-PG13.5-AD18.5	PG13.5	AD18.5	16.5	28	70	12	25.7	20.4
RKHW-PG16-AD21.2	PG16	AD21.2	17.5	30	73.5	12	26	22.5
RKHW-PG21-AD25.0	PG21	AD25.0	21.5	34	82	12	28.5	28.3
RKHW-PG21-AD28.5	PG21	AD28.5	23	37	82	12.2	27.8	28.3
RKHW-PG29-AD34.5	PG29	AD34.5	30.5	44	96.5	12	36.5	37
RKHW-PG36-AD42.5	PG36	AD42.5	37.5	531	110	12	41.7	47.3
RKHW-PG48-AD54.5	PG48	AD54.5	48.5	66.5	126	14.5	46	59.3

波纹管电缆格兰头

Tensile hose connector

品牌：蓝江/Land



材料：尼龙6

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：一端快速锁紧波纹管，一端锁紧电缆线

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: One end quickly locks the corrugated tube, and the other end locks the cable

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装数量
Product model	Thread size	Cable range	Adapter hose	Thread length	quantity
PN.	Metric	Φ mm	AD mm	L mm	Pcs/bag
RKD-M12B-08-AD10	M12×1.5	4~8	AD10	8.5	50
RKD-M12B-05-AD10	M12×1.5	3~5	AD10	8.5	50
RKD-M12BL-08-AD10	M12×1.5	4~8	AD10	15	50
RKD-M12BL-05-AD10	M12×1.5	3~5	AD10	15	50
RKD-M16BS-08-AD10	M16×1.5	4~8	AD10	10	50
RKD-M16BS-05-AD10	M16×1.5	3~5	AD10	10	50
RKD-M16BSL-08-AD10	M16×1.5	4~8	AD10	15	50
RKD-M16BSL-05-AD10	M16×1.5	3~5	AD10	15	50

RKD-M16B-10-AD13	M16×1.5	6~10	AD13	10	50
RKD-M16B-07-AD13	M16×1.5	4~7	AD13	10	50
RKD-M16BL-10-AD13	M16×1.5	6~10	AD13	15	50
RKD-M16BL-07-AD13	M16×1.5	4~7	AD13	15	50
RKD-M18B-10-AD13	M18×1.5	6~10	AD13	10	50
RKD-M18B-07-AD13	M18×1.5	4~7	AD13	10	50
RKD-M18BL-10-AD13	M18×1.5	6~10	AD13	15	50
RKD-M18BL-07-AD13	M18×1.5	4~7	AD13	15	50
RKD-M20BM-10-AD15.8	M20×1.5	6~10	AD15.8	10	50
RKD-M20BM-07-AD15.8	M20×1.5	4~7	AD15.8	10	50
RKD-M20BS-12-AD15.8	M20×1.5	6~12	AD15.8	10	50
RKD-M20BS-09-AD15.8	M20×1.5	5~9	AD15.8	10	50
RKD-M20BSL-12-AD15.8	M20×1.5	6~12	AD15.8	15	50
RKD-M20BSL-09-AD15.8	M20×1.5	5~9	AD15.8	15	50
RKD-M20B-14-AD15.8	M20×1.5	8~14	AD15.8	10	50
RKD-M20B-11-AD15.8	M20×1.5	6~11	AD15.8	10	50
RKD-M20B-07-AD15.8	M20×1.5	4~7	AD15.8	10	50
RKD-M20BL-14-AD15.8	M20×1.5	8~14	AD15.8	15	50
RKD-M20BL-11-AD15.8	M20×1.5	6~11	AD15.8	15	50
RKD-M20BL-07-AD15.8	M20×1.5	4~7	AD15.8	15	50
RKD-M22B-14-AD18.5	M22×1.5	8~14	AD18.5	10	50
RKD-M22B-11-AD18.5	M22×1.5	6~11	AD18.5	10	50
RKD-M25B-18-AD21.2	M25×1.5	13~18	AD21.2	12	50
RKD-M25B-13-AD21.2	M25×1.5	7~13	AD21.2	12	50
RKD-M25B-08-AD21.2	M25×1.5	4~8	AD21.2	12	50
RKD-M25BL-18-AD21.2	M25×1.5	13~18	AD21.2	15	50
RKD-M25BL-13-AD21.2	M25×1.5	7~13	AD21.2	15	50
RKD-M25BL-08-AD21.2	M25×1.5	4~8	AD21.2	15	50
RKD-M25BS-14-AD21.2	M25×1.5	8~14	AD21.2	12	50
RKD-M25BS-10-AD21.2	M25×1.5	6~10	AD21.2	12	50
RKD-M25BS-07-AD21.2	M25×1.5	4~7	AD21.2	12	50
RKD-M32B-25-AD34.5	M32×1.5	18~25	AD34.5	15	20
RKD-M32B-22-AD34.5	M32×1.5	16~22	AD34.5	15	20
RKD-M32B-18-AD34.5	M32×1.5	13~18	AD34.5	15	20

带锁紧快速波纹管接头

Waterproof gland for hose and cable

品牌：蓝江/Land

LAND 蓝江

材料：尼龙6

颜色：默认黑色

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：可同时锁紧波纹管与电缆，电缆锁紧后达IP68

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6

Color: default black, optional gray white



Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Can simultaneously lock the corrugated pipe and cable to maintain a waterproof and sealed state

Applications: Machine tools, lighting, security access control, rail transit, robots, etc

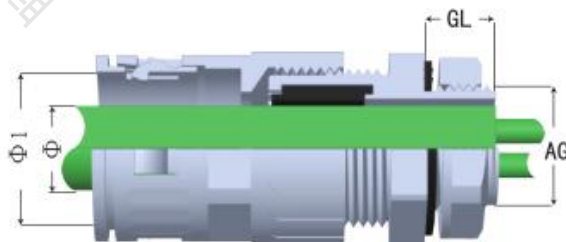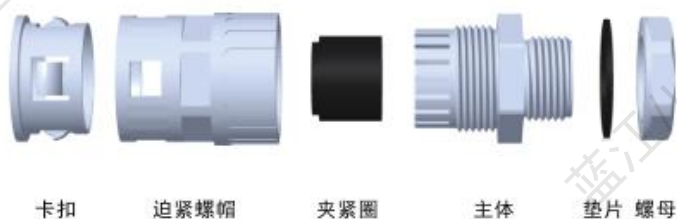

产品尺寸表/M牙

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread L	Wrench Size
PN.	Metric	Φ mm	AD mm	GL mm	nut/cap mm
RGK10-MG12S-07	M12×1.5	3~6.5	AD10	8.5	18/15
RGK13-MG12-08	M12×1.5	4~8	AD13	8.5	18/19
RGK13-MG12-05	M12×1.5	3~5	AD13	8.5	18/19
RGK13-MG14-08	M14×1.5	4~8	AD13	8.5	18/19
RGK13-MG16S-08	M16×1.5	4~8	AD13	10	22/19
RGK15.8-MG16-10	M16×1.5	6~10	AD15.8	10	22/22
RGK15.8-MG16-07	M16×1.5	4~7	AD15.8	10	22/22
RGK15.8-MG18-10	M18×1.5	6~10	AD15.8	10	24/22
RGK15.8-MG20M-10	M20×1.5	6~10	AD15.8	10	27/22
RGK15.8-MG20M-07	M20×1.5	4~7	AD15.8	10	27/22
RGK18.5-MG20S-12	M20×1.5	6~12	AD18.5	10	27/24
RGK18.5-MG20S-09	M20×1.5	5~9	AD18.5	10	27/24
RGK21.2-MG20-14	M20×1.5	8~14	AD21.2	10	27/27
RGK21.2-MG20-11	M20×1.5	6~11	AD21.2	10	27/27
RGK21.2-MG20-07	M20×1.5	4~7	AD21.2	10	27/27
RGK21.2-MG22-14	M22×1.5	8~14	AD21.2	10	29/27
RGK21.2-MG24-14	M24×1.5	8~14	AD21.2	10	29/27
RGK21.2-MG25S-14	M25×1.5	8~14	AD21.2	12	33/27
RGK25.0-MG25-18	M25×1.5	13~18	AD25	12	33/33
RGK28.5-MG25-18	M25×1.5	13~18	AD28.5	12	33/33
RGK25.0-MG32S-18	M32×1.5	13~18	AD25	15	41/33
RGK28.5-MG32S-18	M32×1.5	13~18	AD28.5	15	41/33
RGK34.5-MG32-25	M32×1.5	18~25	AD34.5	15	41/41
RGK34.5-MG32-22	M32×1.5	16~22	AD34.5	15	41/41
RGK34.5-MG36-25	M36×1.5	18~25	AD34.5	12	45/41
RGK34.5-MG40S-25	M40×1.5	18~25	AD34.5	20	50/41
RGK42.5-MG40-32	M40×1.5	24~32	AD42.5	20	50/50
RGK42.5-MG40-25	M40×1.5	18~25	AD42.5	20	50/50
RGK54.5-MG50-41	M50×1.5	31~41	AD54.5	22	62/62
RGK54.5-MG50-33	M50×1.5	25~33	AD54.5	22	62/62

产品尺寸表PG牙

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	PG	Φ mm	AD mm	GL mm	nut/cap mm
RGK10-PG7S-07	PG7	3~6.5	AD10	8.5	17/15
RGK13-PG7-08	PG7	4~8	AD13	8.5	17/19
RGK13-PG7-05	PG7	3~5	AD13	8.5	17/19
RGK13-PG9-08	PG9	4~8	AD13	8.5	22/19
RGK13-PG9-05	PG9	3~5	AD13	8.5	22/19
RGK15.8-PG11-10	PG11	6~10	AD15.8	10	22/22
RGK15.8-PG11-07	PG11	4~7	AD15.8	10	22/22
RGK18.5-PG13.5-12	PG13.5	6~12	AD18.5	10	27/24
RGK18.5-PG13.5-09	PG13.5	5~9	AD18.5	10	27/24
RGK21.2-PG16-14	PG16	8~14	AD21.2	11	30/27
RGK21.2-PG16-11	PG16	6~11	AD21.2	11	30/27
RGK21.2-PG16-09	PG16	6~9	AD21.2	11	30/27
RGK21.2-PG16-07	PG16	4~7	AD21.2	11	30/27
RGK21.2-PG19-14	PG19	8~14	AD21.2	11	30/27
RGK21.2-PG19-11	PG19	6~11	AD21.2	11	30/27
RGK25-PG21-18	PG21	13~18	AD25	12	36/33
RGK25-PG21-13	PG21	8~13	AD25	12	36/33
RGK25-PG21-08	PG21	4~8	AD25	12	36/33
RGK28.5-PG21-18	PG21	13~18	AD28.5	12	36/33
RGK28.5-PG21-13	PG21	8~13	AD28.5	12	36/33
RGK28.5-PG21-08	PG21	4~8	AD28.5	12	36/33
RGK34.5-PG29-25	PG29	18~25	AD34.5	12	46/41
RGK34.5-PG29-22	PG29	16~22	AD34.5	12	46/41
RGK42.5-PG36-32	PG36	24~32	AD42.5	15	57/50
RGK42.5-PG36-25	PG36	18~25	AD42.5	15	57/50
RGK54.5-PG42-41	PG42	31~41	AD54.5	15.5	62/62
RGK54.5-PG42-33	PG42	25~33	AD54.5	15.5	62/62

产品规尺寸表G(PF)/NPT

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	G (PF)	Φ mm	AD mm	GL mm	nut/cap mm
RGK13.0-G1/4-08	G1/4	4~8	AD13	8.5	19/19
RGK15.8-G3/8-10	G3/8	6~10	AD15.8	10	22/22
RGK18.5-G1/2-12	G1/2	6~12	AD18.5	10	27/24
RGK21.2-G1/2-14	G1/2	8~14	AD21.2	15	30/27
RGK25.0-G3/4-18	G3/4	13~18	AD25	12	33/33
RGK25.0-G3/4-13	G3/4	7~13	AD25	12	33/33
RGK28.5-G3/4-18	G3/4	13~18	AD28.5	12	33/33
RGK28.5-G3/4-13	G3/4	7~13	AD28.5	12	33/33
RGK34.5-G1-25	G1	18~25	AD34.5	13.5	42/41
RGK34.5-G1-22	G1	16~22	AD34.5	13.5	42/41
RGK42.5-G1-1/4-32	G1-1/4	24~32	AD42.5	15	51/50
RGK42.5-G1-1/4-25	G1-1/4	18~25	AD42.5	15	51/50
RGK54.5-G1-1/2-41	G1-1/2	31~41	AD54.5	16	62/62
RGK54.5-G1-1/2-33	G1-1/2	25~33	AD54.5	16	62/62
RGK13.0-NPT1/4-08	NPT1/4	4~8	AD13	8.5	19/19
RGK15.8-NPT3/8-10	NPT3/8	6~10	AD15.8	10	22
RGK18.5-NPT1/2-12	NPT1/2	6~12	AD18.5	10	27
RGK25.0-NPT3/4-18	NPT3/4	13~18	AD25	15	33
RGK25.0-NPT3/4-13	NPT3/4	7~13	AD25	15	33
RGK28.5-NPT3/4-18	NPT3/4	13~18	AD28.5	15	33
RGK28.5-NPT3/4-13	NPT3/4	7~13	AD28.5	15	33
RGK34.5-NPT1-25	NPT1	18~25	AD34.5	17	41
RGK34.5-NPT1-22	NPT1	16~22	AD34.5	17	41
RGK42.5-NPT1-1/4-32	NPT1-1/4	24~32	AD42.5	17	50
RGK42.5-NPT1-1/4-25	NPT1-1/4	18~25	AD42.5	17	50
RGK54.5-NPT1-1/2-41	NPT1-1/2	31~41	AD54.5	16	62/62
RGK54.5-NPT1-1/2-33	NPT1-1/2	25~33	AD54.5	16	62/62

加长尺寸表M/PG

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread L	Wrench Size
PN.	Metric	Φ mm	AD mm	GL mm	nut/cap mm
RGK10-MG12SL-07	M12×1.5	3~6.5	AD10	15	18/15
RGK13-MG12L-08	M12×1.5	4~8	AD13	15	18/19
RGK13-MG12L-05	M12×1.5	3~5	AD13	15	18/19
RGK13-MG16SL-08	M16×1.5	4~8	AD13	15	22/19
RGK15.8-MG16L-10	M16×1.5	6~10	AD15.8	15	22/22
RGK15.8-MG16L-07	M16×1.5	4~7	AD15.8	15	22/22
RGK15.8-MG18L-10	M18×1.5	6~10	AD15.8	15	24/22
RGK18.5-MG20SL-12	M20×1.5	6~12	AD18.5	15	27/24
RGK18.5-MG20SL-09	M20×1.5	5~9	AD18.5	15	27/24
RGK21.2-MG20L-14	M20×1.5	8~14	AD21.2	15	27/27
RGK21.2-MG20L-11	M20×1.5	6~11	AD21.2	15	27/27
RGK25-MG25L-18	M25×1.5	13~18	AD25	15	33/33
RGK25-MG25L-13	M25×1.5	7~13	AD25	15	33/33
RGK28.5-MG25L-18	M25×1.5	13~18	AD28.5	15	33/33
RGK28.5-MG25L-13	M25×1.5	7~13	AD28.5	15	33/33
RGK10-PG7SL-07	PG7	3~6.5	AD10	15	17/15
RGK13-PG7L-08	PG7	4~8	AD13	15	17/19
RGK13-PG7L-05	PG7	3~5	AD13	15	17/19
RGK13-PG9L-08	PG9	4~8	AD13	15	22/19
RGK13-PG9L-05	PG9	3~5	AD13	15	22/19
RGK15.8-PG11L-10	PG11	6~10	AD15.8	15	22/22
RGK15.8-PG11L-07	PG11	4~7	AD15.8	15	22/22
RGK18.5-PG13.5L-12	PG13.5	6~12	AD18.5	15	27/24
RGK18.5-PG13.5L-09	PG13.5	5~9	AD18.5	15	27/24
RGK21.2-PG16L-14	PG16	8~14	AD21.2	15	30/27
RGK25-PG21L-18	PG21	13~18	AD25	15	36/33
RGK25-PG21L-13	PG21	8~13	AD25	15	36/33
RGK25-PG21L-08	PG21	4~8	AD25	15	36/33
RGK28.5-PG21L-18	PG21	13~18	AD28.5	15	36/33
RGK28.5-PG21L-13	PG21	8~13	AD28.5	15	36/33

带锁紧防水波纹管接头

Waterproof gland for hose and cable

品牌：蓝江/Land

LAND 蓝江

材料：尼龙6

颜色：默认黑色

防水：IP68

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：可同时锁紧波纹管与电缆，软管与电缆可

同时达到IP68防护，抗拉力强

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6

Color: default black

Waterproof: IP68

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance:It can simultaneously lock the corrugated pipe and cable, and the hose and cable can achieve IP68 protection at the same time, with strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表/M

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	G (PF)	Φ mm	AD mm	GL mm	nut/cap mm
RGQ10-MG12-08	M12×1.5	4~8	AD10	8.5	18/19
RGQ10-MG12-05	M12×1.5	3~5	AD10	8.5	18/19
RGQ10-MG14-08	M14×1.5	4~8	AD10	8.5	18/19
RGQ10-MG16S-08	M16×1.5	4~8	AD10	10	22/19
RGQ13-MG16-10	M16×1.5	6~10	AD13	10	22/22
RGQ13-MG16-07	M16×1.5	4~7	AD13	10	22/22
RGQ13-MG18-10	M18×1.5	6~10	AD13	10	24/22
RGQ13-MG20M-10	M20×1.5	6~10	AD13	10	27/22
RGQ13-MG20M-07	M20×1.5	4~7	AD13	10	27/22
RGQ15.8-MG16-10	M16×1.5	6~10	AD15.8	10	22/22
RGQ15.8-MG16-07	M16×1.5	4~7	AD15.8	10	22/22
RGQ15.8-MG18-10	M18×1.5	6~10	AD15.8	10	24/22
RGQ15.8-MG18-07	M18×1.5	4~7	AD15.8	10	24/22
RGQ15.8-MG20M-10	M20×1.5	6~10	AD13	10	27/22
RGQ15.8-MG20M-07	M20×1.5	4~7	AD13	10	27/22
RGQ21.2-MG20-14	M20×1.5	8~14	AD21.2	10	27/27
RGQ21.2-MG20-11	M20×1.5	6~11	AD21.2	10	27/27
RGQ21.2-MG22-14	M22×1.5	8~14	AD21.2	10	29/27
RGQ21.2-MG22-11	M22×1.5	6~11	AD21.2	10	29/27
RGQ21.2-MG24-14	M24×1.5	8~14	AD21.2	10	30/27
RGQ21.2-MG25S-14	M25×1.5	8~14	AD21.2	10	27/27
RGQ28.5-MG25-18	M25×1.5	13~18	AD28.5	12	33/33
RGQ28.5-MG27-18	M27×1.5	13~18	AD28.5	12	33/33
RGQ34.5-MG32-25	M32×1.5	18~25	AD34.5	15	41/41
RGQ34.5-MG32-22	M32×1.5	16~22	AD34.5	15	41/41
RGQ34.5-MG36-25	M36×1.5	18~25	AD34.5	15	41/41
RGQ42.5-MG40-31	M40×1.5	24~31	AD42.5	20	50/50
RGQ42.5-MG40-25	M40×1.5	18~25	AD42.5	20	50/50
RGQ42.5-MG42-31	M42×2.0	24~31	AD42.5	20	50/50

产品尺寸表/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	G(PF)	Φ mm	AD mm	GL mm	nut/cap mm
RGQ10.0-PG7-08	PG7	4~8	AD10	8.5	18/19
RGQ10.0-PG9-08	PG9	4~8	AD10	10	22/19
RGQ13.0-PG11-10	PG11	6~10	AD13.0	10	24/22
RGQ15.8-PG11-10	PG11	6~10	AD15.8	10	22/22
RGQ21.2-PG16-14	PG16	8~14	AD21.2	10	27/27
RGQ21.2-PG19-14	PG19	8~14	AD21.2	10	30/27
RGQ28.5-PG21-18	PG21	13~18	AD28.5	12	33/33
RGQ34.5-PG29-25	PG29	18~25	AD34.5	15	41/41
RGQ42.5-PG36-32	PG36	24~32	AD42.5	20	50/50
RGQ10.0-G1/4-08	G1/4	4~8	AD10	8.5	18/19
RGQ13.0-G3/8-10	G3/8	6~10	AD13.0	10	24/22
RGQ15.8-G3/8-10	G3/8	6~10	AD15.8	10	24/22
RGQ21.2-G1/2-14	G1/2	8~14	AD21.2	10	27/27
RGQ28.5-G3/4-18	G3/4	13~18	AD28.5	12	33/33
RGQ34.5-G1-25	G1	18~25	AD34.5	15	41/41
RGQ42.5-G1-1/4-32	G1-1/4	24~32	AD42.5	20	50/50
RGQ10-NPT1/4-08	NPT1/4	4~8	AD10	8.5	18/19
RGQ13-NPT3/8-10	NPT3/8	6~10	AD13	10	24/22
RGQ15.8-NPT3/8-10	NPT3/8	6~10	AD15.8	10	24/22
RGQ21.2-NPT1/2-14	NPT1/2	8~14	AD21.2	10	27/27
RGQ28.5-NPT3/4-18	NPT3/4	13~18	AD28.5	12	33/33
RGQ34.5-NPT1-25	NPT1	18~25	AD34.5	15	41/41
RGQ42.5-NPT1-1/4-32	NPT1-1/4	24~32	AD42.5	20	50/50

产品尺寸表/M/PG加长款

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	G (PF)	φ mm	AD mm	GL mm	nut/cap mm
RGQ10-MG12L-08	M12×1.5	4~8	AD10	15	18/19
RGQ10-MG12L-05	M12×1.5	3~5	AD10	15	18/19
RGQ10-MG16SL-08	M16×1.5	4~8	AD10	15	22/19
RGQ13-MG16L-10	M16×1.5	6~10	AD13	15	22/22
RGQ13-MG16L-07	M16×1.5	4~7	AD13	15	22/22
RGQ13-MG18L-10	M18×1.5	6~10	AD13	15	24/22
RGQ13-MG18L-07	M18×1.5	4~7	AD13	15	24/22
RGQ15.8-MG16L-10	M16×1.5	6~10	AD15.8	15	22/22
RGQ15.8-MG16L-07	M16×1.5	4~7	AD15.8	15	22/22
RGQ15.8-MG18L-10	M18×1.5	6~10	AD15.8	15	24/22
RGQ15.8-MG18L-07	M18×1.5	4~7	AD15.8	15	24/22
RGQ21.2-MG20L-14	M20×1.5	8~14	AD21.2	15	27/27
RGQ21.2-MG20L-11	M20×1.5	6~11	AD21.2	15	27/27
RGQ21.2-MG20L-07	M20×1.5	4~7	AD21.2	15	27/27
RGQ28.5-MG25L-18	M25×1.5	13~18	AD28.5	15	33/33
RGQ28.5-MG25L-13	M25×1.5	7~13	AD28.5	15	33/33
RGQ28.5-MG25L-08	M25×1.5	4~8	AD28.5	15	33/33
RGQ10-PG7L-08	PG7	4~8	AD10	15	18/19
RGQ10-PG7L-05	PG7	3~5	AD10	15	18/19
RGQ10-PG9L-08	PG9	4~8	AD10	15	22/19
RGQ13-PG11L-10	PG11	6~10	AD13.0	15	24/22
RGQ13-PG11L-07	PG11	4~7	AD13.0	15	24/22
RGQ15.8-PG11L-10	PG11	6~10	AD15.8	15	22/22
RGQ15.8-PG11L-07	PG11	4~7	AD15.8	15	22/22
RGQ21.2-PG16L-14	PG16	8~14	AD21.2	15	27/27
RGQ21.2-PG16L-11	PG16	6~11	AD21.2	15	27/27
RGQ21.2-PG16L-07	PG16	4~7	AD21.2	15	27/27
RGQ28.5-PG21L-18	PG21	13~18	AD28.5	15	33/33
RGQ28.5-PG21L-13	PG21	7~13	AD28.5	15	33/33
RGQ28.5-PG21L-08	PG21	4~8	AD28.5	15	33/33

带锁紧快速波纹管弯头

Quick hose elbow with locking mechanism

品牌：蓝江/Land

LAND 蓝江

材料：尼龙6

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：90度弯角设计，可同时锁紧波纹管与电

缆，软管与电缆可达到IP68防护，抗拉力强

应用：机床，照明，安防，轨道交通，机器人



Brand: Land

Material: Nylon 6

Color: default black


Waterproof: IP68

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Designed with a 90 degree bend angle, it can simultaneously lock the corrugated pipe and cable. The hose and cable can achieve IP68 protection at the same time, with strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots

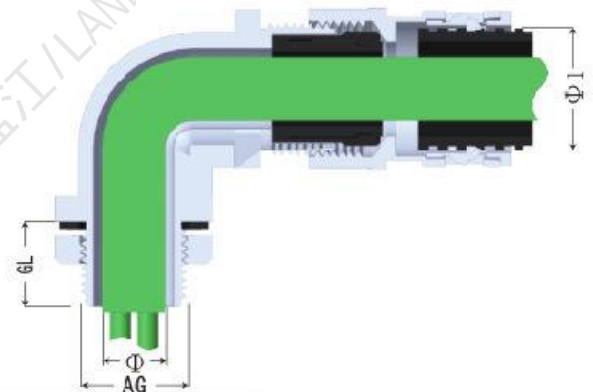

产品尺寸表

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	Metric	Φ mm	AD mm	GL mm	nut/cap mm
RGW13.0-MG12-08	M12×1.5	4~8	AD13.0	8	17/16
RGW13.0-MG12-05	M12×1.5	3~5.5	AD13.0	8	17/16
RGW13.0-MG12-03	M12×1.5	1.5~3	AD13.0	8	17/16
RGW15.8-MG16-10	M16×1.5	6~10	AD15.8	10	22/22
RGW15.8-MG16-07	M16×1.5	4~7	AD15.8	10	22/22
RGW15.8-MG16-05	M16×1.5	3~5	AD15.8	10	22/22
RGW15.8-MG16-04	M16×1.5	2~4	AD15.8	10	22/22
RGW21.2-MG20-14	M20×1.5	8~14	AD21.2	15	27/27
RGW21.2-MG20-11	M20×1.5	6~11	AD21.2	15	27/27
RGW21.2-MG20-09	M20×1.5	5~9	AD21.2	15	27/27
RGW25.0-MG25-18	M25×1.5	13~18	AD25	15	33/33
RGW25.0-MG25-16	M25×1.5	11~16	AD25	15	33/33
RGW25.0-MG25-14	M25×1.5	8~14	AD25	15	33/33
RGW25.0-MG25-10	M25×1.5	6~10	AD25	15	33/33
RGW28.5-MG25-18	M25×1.5	13~18	AD28.5	15	33/33
RGW28.5-MG25-16	M25×1.5	11~16	AD28.5	15	33/33
RGW28.5-MG25-14	M25×1.5	8~14	AD28.5	15	33/33
RGW28.5-MG25-10	M25×1.5	6~10	AD28.5	15	33/33
RGW34.5-MG32-25	M32×1.5	18~25	AD34.5	15	41/41
RGW34.5-MG32-22	M32×1.5	16~22	AD34.5	15	41/41
RGW42.5-MG40-31	M40×1.5	24~31	AD42.5	20	50/50
RGW42.5-MG40-25	M40×1.5	18~25	AD42.5	20	50/50
RGW54.5-MG50-41	M50×1.5	35~31	AD54.5	20	50/50
RGW54.5-MG50-33	M50×1.5	25~33	AD54.5	20	50/50
RGW21.2-G1/2-14	G1/2	8~14	AD21.2	15	27/27
RGW21.2-MG20-11	G1/2	6~11	AD21.2	15	27/27
RGW21.2-G1/2-09	G1/2	5~9	AD21.2	15	27/27

带锁紧快速波纹管弯头

Quick hose elbow with locking mechanism

品牌：蓝江/Land



材料：尼龙6

颜色：默认黑色

防水：IP68

阻燃：UL94V-2(可定制V0)

温度：-40°C-105°C

环保：符合ROHS2.0标准

性能：90度弧形弯角设计，可同时锁紧波纹管

与电缆，软管与电缆可同时达到IP68防护，穿

线便捷，使用高效

应用：机床，照明，安防门禁，轨道交通，机器人



Brand: Land

Material: Nylon 6

Color: default black

Waterproof: IP68

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Designed with a 90 degree curved angle, it can lock both the corrugated pipe and the cable at the same time. The hose and cable can achieve IP68 protection at the same time, making it easy to thread and efficient to use

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	螺纹规格	适配软管	电缆范围	螺纹长度	扳手尺寸
Product model	Thread size	Adapter hose	Cable range	Thread length	Wrench Size
PN.	Metric	AD	Φ mm	GL mm	nut/cap mm
RGHW13.0-MG12-08	M12×1.5	4~8	AD13.0	8	17/16
RGHW13.0-MG12-05	M12×1.5	3~5.5	AD13.0	8	17/16
RGHW13.0-MG12-03	M12×1.5	1.5~3	AD13.0	8	17/16
RGHW15.8-MG16-10	M16×1.5	6~10	AD15.8	10	22/22
RGHW15.8-MG16-07	M16×1.5	4~7	AD15.8	10	22/22
RGHW15.8-MG16-05	M16×1.5	3~5	AD15.8	10	22/22
RGHW15.8-MG16-04	M16×1.5	2~4	AD15.8	10	22/22
RGHW21.2-MG20-14	M20×1.5	8~14	AD21.2	15	27/27
RGHW21.2-MG20-11	M20×1.5	6~11	AD21.2	15	27/27
RGHW21.2-MG20-09	M20×1.5	5~9	AD21.2	15	27/27
RGHW25.0-MG25-18	M25×1.5	13~18	AD25	15	33/33
RGHW25.0-MG25-16	M25×1.5	11~16	AD25	15	33/33
RGHW25.0-MG25-14	M25×1.5	8~14	AD25	15	33/33
RGHW25.0-MG25-10	M25×1.5	6~10	AD25	15	33/33
RGHW28.5-MG25-18	M25×1.5	13~18	AD28.5	15	33/33
RGHW28.5-MG25-16	M25×1.5	11~16	AD28.5	15	33/33
RGHW28.5-MG25-14	M25×1.5	8~14	AD28.5	15	33/33
RGHW28.5-MG25-10	M25×1.5	6~10	AD28.5	15	33/33
RGHW34.5-MG32-25	M32×1.5	18~25	AD34.5	15	41/41
RGHW34.5-MG32-22	M32×1.5	16~22	AD34.5	15	41/41
RGHW42.5-MG40-31	M40×1.5	24~31	AD42.5	20	50/50
RGHW42.5-MG40-25	M40×1.5	18~25	AD42.5	20	50/50
RGHW54.5-MG50-41	M50×1.5	35~31	AD54.5	20	50/50
RGHW54.5-MG50-33	M50×1.5	25~33	AD54.5	20	50/50

带锁紧不锈钢防水波纹管接头

Waterproof stainless steel gland for hose and cable

品牌: 蓝江/Land



材料: 304, 可选316或316L

颜色: 银色

防水: IP68


阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

性能: 可同时锁紧波纹管与电缆, 软管与电缆可

同时达到IP68防护, 抗拉力强

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人

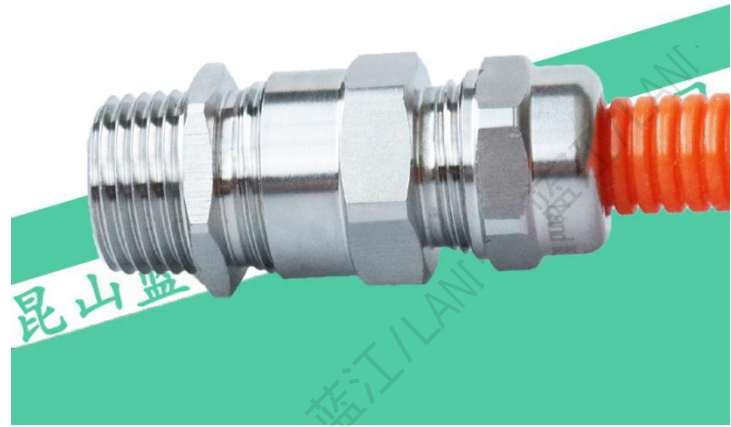

Brand: Land

Material: 304, optional 316 or 316L

Color: silvery

Waterproof: IP68

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Performance:It can simultaneously lock the corrugated pipe and cable, and the hose and cable can achieve IP68 protection at the same time, with strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表/M

蓝江产品型号	螺纹规格	适配软管	电缆范围	螺纹长度	包装数量
Product Model	Thread size	Adaptor hose	Cable range	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RGQ-M12-05-AD10.0-SS	M12×1.5	AD10.0	3~5.5	9	50
RGQ-M12-08-AD13.0-SS	M12×1.5	AD13.0	4~8	9	50
RGQ-M16-08-AD13.0-SS	M16×1.5	AD13.0	4~8	9.5	50
RGQ-M16-10-AD15.8-SS	M16×1.5	AD15.8	6~10	9.5	50
RGQ-M18-10-AD15.8-SS	M18×1.5	AD15.8	6~10	9.5	50
RGQ-M20-08-AD13.0-SS	M20×1.5	AD13.0	4~8	12	50
RGQ-M20-10-AD15.8-SS	M20×1.5	AD15.8	5~9	12	50
RGQ-M20-12-AD18.5-SS	M20×1.5	AD18.5	7~12	12	50
RGQ-M20-14-AD21.2-SS	M20×1.5	AD21.2	8~14	12	50
RGQ-M22-12-AD18.5-SS	M22×1.5	AD18.5	8~12	12	50
RGQ-M22-14-AD21.2-SS	M22×1.5	AD21.2	8~14	12	50
RGQ-M24-12-AD18.5-SS	M24×1.5	AD18.5	8~12	10.5	50
RGQ-M24-14-AD21.2-SS	M24×1.5	AD21.2	8~14	10.5	50
RGQ-M25-16-AD21.2-SS	M25×1.5	AD21.2	12~16	12	20
RGQ-M25-18-AD25.0-SS	M25×1.5	AD25.0	13~18	12	20
RGQ-M25-18-AD28.5-SS	M25×1.5	AD28.5	13~18	12	20
RGQ-M27-18-AD28.5-SS	M27×1.5	AD28.5	13~18	12	20
RGQ-M30-18-AD28.5-SS	M30×2.0	AD28.5	13~18	12.5	20
RGQ-M32-18-AD28.5-SS	M32×1.5	AD28.5	13~18	12	20
RGQ-M32-22-AD28.5-SS	M32×1.5	AD28.5	17~22	12.5	20
RGQ-M32-25-AD34.5-SS	M32×1.5	AD34.5	18~25	12.5	20
RGQ-M36-25-AD34.5-SS	M36×2.0	AD34.5	18~25	13	20
RGQ-M40-25-AD34.5-SS	M40×1.5	AD34.5	18~25	14	10
RGQ-M40-31-AD42.5-SS	M40×1.5	AD42.5	25~31	14	10
RGQ-M42-31-AD42.5-SS	M42×2.0	AD42.5	25~31	15	10
RGQ-M48-31-AD42.5-SS	M48×2.0	AD42.5	25~31	15	10
RGQ-M50-33-AD42.5-SS	M50×1.5	AD42.5	25~33	15	10
RGQ-M50-41-AD54.5-SS	M50×1.5	AD54.5	33~41	15	10
RGQ-M60-44-AD54.5-SS	M60×2.0	AD54.5	36~44	15	10
RGQ-M63-44-AD54.5-SS	M63×1.5	AD54.5	36~44	15	10
RGQ-M63-54-AD54.5-SS	M63×1.5	AD54.5	46~54	15	10

产品尺寸表/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	适配软管	电缆范围	螺纹长度	包装数量
Product Model	Thread size	Adaptor hose	Cable range	Thread length	quantity
PN.	G&NPT	Φ mm	Φ mm	GL mm	Pcs/bag
RGQ-G1/4-05-AD10.0-SS	G1/4	AD10.0	3~5.5	9	50
RGQ-G1/4-08-AD13.0-SS	G1/4	AD13.0	4~8	9	50
RGQ-G3/8-10-AD15.8-SS	G3/8	AD15.8	6~10	9.5	50
RGQ-G1/2-10-AD15.8-SS	G1/2	AD15.8	5~9	12	50
RGQ-G1/2-12-AD18.5-SS	G1/2	AD18.5	7~12	12	50
RGQ-G1/2-14-AD21.2-SS	G1/2	AD21.2	8~14	12	50
RGQ-G3/4-18-AD28.5-SS	G3/4	AD28.5	13~18	12	20
RGQ-G1-25-AD34.5-SS	G1	AD34.5	18~25	15	20
RGQ-G1-1/4-25-AD34.5-SS	G1-1/4	AD34.5	18~25	15	10
RGQ-G1-1/4-31-AD42.5-SS	G1-1/4	AD42.5	25~31	15	10
RGQ-G1-1/2-31-AD42.5-SS	G1-1/2	AD42.5	25~31	15	10
RGQ-G1-1/2-41-AD54.5-SS	G1-1/2	AD54.5	33~41	15	10
RGQ-G2-44-AD54.5-SS	G2	AD54.5	36~44	15	10
RGQ-NPT1/4-05-AD10.0-SS	NPT1/4	AD10.0	3~5.5	9	50
RGQ-NPT1/4-08-AD13.0-SS	NPT1/4	AD13.0	4~8	9	50
RGQ-NPT3/8-10-AD15.8-SS	NPT3/8	AD15.8	6~10	9.5	50
RGQ-NPT1/2-10-AD15.8-SS	NPT1/2	AD15.8	5~9	12	50
RGQ-NPT1/2-12-AD18.5-SS	NPT1/2	AD18.5	7~12	12	50
RGQ-NPT1/2-14-AD21.2-SS	NPT1/2	AD21.2	8~14	12	50
RGQ-NPT3/4-18-AD28.5-SS	NPT3/4	AD28.5	13~18	12	20
RGQ-NPT1-25-AD34.5-SS	NPT1	AD34.5	18~25	15	20
RGQ-NPT1-1/4-25-AD34.5-SS	NPT1-1/4	AD34.5	18~25	15	10
RGQ-NPT1-1/4-31-AD42.5-SS	NPT1-1/4	AD42.5	25~31	15	10
RGQ-NPT1-1/2-31-AD42.5-SS	NPT1-1/2	AD42.5	25~31	15	10
RGQ-NPT1-1/2-41-AD54.5-SS	NPT1-1/2	AD54.5	33~41	15	10
RGQ-NPT2-44-AD54.5-SS	NPT2	AD54.5	36~44	15	10

带锁紧铜镀镍防水波纹管接头

Waterproof gland for hose and cable

品牌: 蓝江/Land



材料: 黄铜镀镍

颜色: 银色

防水: IP68


阻燃: UL94V-2(可定制V0)

温度: -40°C-105°C

性能: 可同时锁紧波纹管与电缆, 软管与电缆

可同时达到IP68防护, 抗拉力强

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人

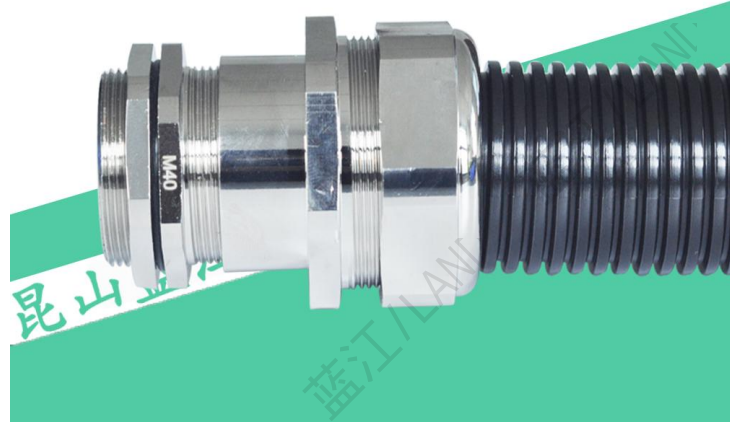

Brand: Land

Material: Nickel Plated Brass

Color: silvery

Waterproof: IP68

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Performance:It can simultaneously lock the corrugated pipe and cable, and the hose and cable can achieve IP68 protection at the same time, with strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	Metric	Φ mm	AD mm	GL mm	nut/cap mm
RGQ-M12-08-AD13.0	M12×1.5	4~8	AD13	8	14/22
RGQ-M16-08-AD13.0	M16×1.5	4~8	AD13	8	18/22
RGQ-M16-10-AD15.8	M16×1.5	6~10	AD15.8	8	18/24
RGQ-M20-12-AD15.8	M20×1.5	7~12	AD21.2	8	22/24
RGQ-M20-14-AD18.5	M20×1.5	8~14	AD21.2	9	22/28
RGQ-M20-14-AD21.2	M20×1.5	8~14	AD21.2	9	22/28
RGQ-M25-16-AD21.2	M25×1.5	12~16	AD21.2	10	27/32
RGQ-M25-18-AD25.0	M25×1.5	13~18	AD28.5	10	27/38
RGQ-M25-18-AD28.5	M25×1.5	13~18	AD28.5	10	27/40
RGQ-M32-25-AD34.5	M32×1.5	18~25	AD34.5	10	36/44
RGQ-M40-28-AD34.5	M40×1.5	25~30	AD42.5	12	45/54
RGQ-M40-30-AD42.5	M40×1.5	25~30	AD42.5	12	45/54
RGQ-M50-38-AD54.5	M50×1.5	32~38	AD54.5	12	58/68
RGQ-M63-44-AD54.5	M63×1.5	36~44	AD54.5	15	64/68
RGQ-G1/4-08-AD13.0	G1/4	4~8	AD13	8	14/22
RGQ-G3/8-08-AD13.0	G3/8	4~8	AD13	8	18/22
RGQ-G1/2-12-AD15.8	G1/2	7~12	AD21.2	8	22/24
RGQ-G1/2-14-AD18.5	G1/2	8~14	AD21.2	9	22/28
RGQ-G1/2-14-AD21.2	G1/2	8~14	AD21.2	9	22/28
RGQ-G3/4-16-AD21.2	G3/4	12~16	AD21.2	10	27/32
RGQ-G3/4-18-AD25.0	G3/4	13~18	AD28.5	10	27/38
RGQ-G3/4-18-AD28.5	G3/4	13~18	AD28.5	10	27/40
RGQ-G1-25-AD34.5	G1	18~25	AD34.5	10	36/44
RGQ-G1-1/4-28-AD34.5	G1-1/4	25~30	AD42.5	12	45/54
RGQ-G1-1/4-30-AD42.5	G1-1/4	25~30	AD42.5	12	45/54
RGQ-G1-1/2-38-AD54.5	G1-1/2	32~38	AD54.5	12	58/68
RGQ-G2-44-AD54.5	G2	36~44	AD54.5	15	64/68

组合带锁紧波纹管接头

Combination with locking hose connector

品牌: 蓝江/Land

材料: 不锈钢

颜色: 银色

防水: IP68

阻燃: UL94V-2(可定制V0)


温度: -40°C-105°C

性能: 本款产品由接管式与快速管接头组合而成

,能同时锁紧电缆与软管, 抗拉力强, 防水密封

应用: 机床, 照明, 安防门禁, 轨道交通, 机器人

LAND 蓝江

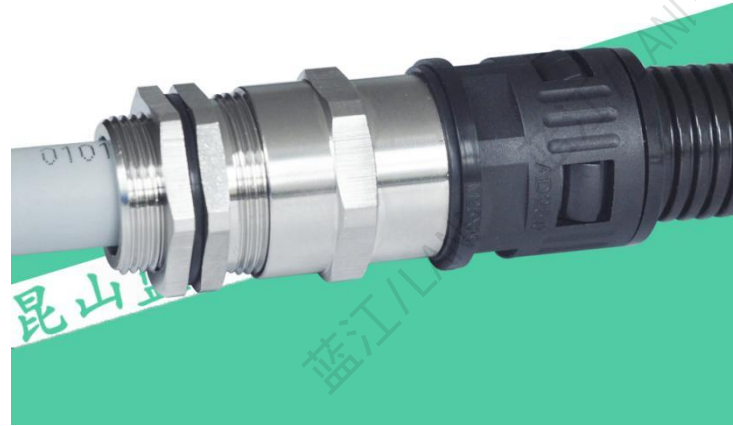

Brand: Land

Material: Nickel Plated Brass

Color: silvery

Waterproof: IP68

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40°C-105°C

Performance: This product is composed of a connecting type and a quick coupling, which can simultaneously lock cables and hoses. It has strong tensile strength and waterproof sealing

Applications: Machine tools, lighting, security access control, rail transit, robots, etc

产品尺寸表/M

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	Metric	Φ mm	AD mm	GL mm	nut/cap mm
RGAD10-M12-06-SS	M12×1.5	3~6	AD10	7	15/14
RGAD10-M12-05-SS	M12×1.5	3~5.5	AD10	9	15/17
RGAD13-M12-08-SS	M12×1.5	4~8	AD13	9	15/17
RGAD13-M16-08-SS	M16×1.5	4~8	AD13	9.5	20/17
RGAD15.8-M16-07-SS	M16×1.5	4~7	AD15.8	9.5	20/21
RGAD15.8-M16-10-SS	M16×1.5	6~10	AD15.8	9.5	20/21
RGAD15.8-M18-07-SS	M18×1.5	4~7	AD15.8	9.5	21/21
RGAD15.8-M18-10-SS	M18×1.5	6~10	AD15.8	9.5	21/21
RGAD21.2-M20-14-SS	M20×1.5	8~14	AD21.2	12	24/26
RGAD18.5-M20-12-SS	M20×1.5	7~12	AD18.5	12	24/24
RGAD15.8-M20-09-SS	M20×1.5	5~9	AD15.8	12	24/24
RGAD21.2-M22-14-SS	M22×1.5	8~14	AD21.2	12	26/26
RGAD21.2-M24-14-SS	M24×1.5	8~14	AD21.2	10.5	28/26
RGAD28.5-M25-18-SS	M25×1.5	13~18	AD28.5	12	30/31
RGAD25.0-M25-18-SS	M25×1.5	13~18	AD25	12	30/31
RGAD21.2-M25-16-SS	M25×1.5	12~16	AD21.2	12	30/31
RGAD21.2-M25-14-SS	M25×1.5	8~14	AD21.2	12	30/31
RGAD28.5-M27-18-SS	M27×1.5/2.0	13~18	AD28.5	12	30/31
RGAD28.5-M30-18-SS	M30×1.5/2.0	13~18	AD28.5	12.5	34/31
RGAD34.5-M32-25-SS	M32×1.5	18~25	AD34.5	12.5	38/40
RGAD28.5-M32-18-SS	M32×1.5	13~18	AD28.5	12	38/31
RGAD34.5-M36-25-SS	M36×1.5/2.0	18~25	AD34.5	13	42/40
RGAD42.5-M40-31-SS	M40×1.5/2.0	25~31	AD42.5	14	48/50
RGAD34.5-M40-25-SS	M40×1.5/2.0	18~25	AD34.5	14	48/50
RGAD54.5-M50-41-SS	M50×1.5	33~41	AD54.5	15	58/60
RGAD54.5-M63-44-SS	M63×1.5	36~44	AD54.5	15	71/65

产品尺寸表/G(PF)

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread length	Wrench Size
PN.	G(PF)	mm	AD mm	mm	nut/cap mm
RGAD10-G1/4-05-SS	G1/4	3~5.5	AD10	9	17/17
RGAD13-G1/4-08-SS	G1/4	4~8	AD13	9	17/17
RGAD15.8-G3/8-10-SS	G3/8	6~10	AD15.8	9.5	21/21
RGAD15.8-G1/2-09-SS	G1/2	5~9	AD15.8	12	24/24
RGAD18.5-G1/2-12-SS	G1/2	7~12	AD18.5	12	24/24
RGAD21.2-G1/2-14-SS	G1/2	8~14	AD21.2	12	24/26
RGAD21.2-G3/4-16-SS	G3/4	12~16	AD21.2	12	30/31
RGAD25-G3/4-18-SS	G3/4	13~18	AD25	12	30/31
RGAD28.5-G3/4-18-SS	G3/4	13~18	AD28.5	12	30/31
RGAD34.5-G1-25-SS	G1	18~25	AD34.5	15	38/40
RGAD42.5-G1-1/4-31-SS	G1-1/4	25~31	AD42.5	15	48/50
RGAD54.5-G1-1/2-41-SS	G1-1/2	33~41	AD54.5	15	55/60
RGAD42.5-G1-1/2-31-SS	G1-1/2	25~31	AD42.5	15	55/50
RGAD54.5G2-44-SS	G2	36~44	AD54.5	15	71/65
RGAD10-NPT1/4-05-SS	NPT1/4	3~5.5	AD10	9	17/17
RGAD13-NPT1/4-08-SS	NPT1/4	4~8	AD13	9	17/17
RGAD15.8-NPT3/8-10-SS	NPT3/8	6~10	AD15.8	9.5	21/21
RGAD15.8-NPT1/2-09-SS	NPT1/2	5~9	AD15.8	12	24/24
RGAD18.5-NPT1/2-12-SS	NPT1/2	7~12	AD18.5	12	24/24
RGAD21.2-NPT1/2-14-SS	NPT1/2	8~14	AD21.2	12	24/26
RGAD21.2-NPT3/4-16-SS	NPT3/4	12~16	AD21.2	12	30/31
RGAD25-NPT3/4-18-SS	NPT3/4	13~18	AD25	12	30/31
RGAD28.5-NPT3/4-18-SS	NPT3/4	13~18	AD28.5	12	30/31
RGAD34.5-NPT1-25-SS	NPT1	18~25	AD34.5	15	38/40
RGAD42.5-NPT1-1/4-31-SS	NPT1-1/4	25~31	AD42.5	15	48/50
RGAD54.5-NPT1-1/2-41-SS	NPT1-1/2	33~41	AD54.5	15	55/60
RGAD42.5-NPT1-1/2-31-SS	NPT1-1/2	25~31	AD42.5	15	55/50
RGAD54.5-NPT2-44-SS	NPT2	36~44	AD54.5	15	71/65

万向旋转管接头

Rotating bellows connector

品牌：蓝江/LAND

材料：尼龙

代码：WLK-RGQX

性能：可跟随机器人360度旋转

应用：工业机器人，协作机器人，自动化设备



产品选型参数表

蓝江产品型号	适配软管	螺纹尺寸	产品类型
LAND model	Adapt hose	Thread size	Product Type
PN.	mm	mm	description
WLK-RGQX-M32-23	23*28.5	M32×1.5	360度直型防水
WLK-RGQX-M32-28	28*34.5	M32×1.5	360度直型防水
WLK-RGQX-PG36-36	36*42.5	PG36	360度直型防水
WLK-RGQX-M63-48	48*54.5	M63×1.5	360度直型防水
WLK-RGQX45-M32-23	23*28.5	M32×1.5	360度弯角防水
WLK-RGQX45-M32-28	28*34.5	M32×1.5	360度弯角防水
WLK-RGQX45-PG36-36	36*42.5	PG36	360度弯角防水
WLK-RGQX45-M63-48	48*54.5	M63×1.5	360度弯角防水
WLK-RGQX90-M32-28	28*34.5	M32×1.5	360度弯角防水
WLK-RGKX-PG36-36	36*42.5	PG36	360度快速抗拉
WLK-RGKX-M63-48	48*54.5	M63×1.5	360度快速抗拉



波纹管防水三通接头/Y型

Three way waterproof connector/Y

品牌：蓝江/Land

材料：尼龙6

温度：-40° C-105° C

性能：Y型三通结构设计，防护等级IP68

Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Y-shaped three-way structure design, protection level IP68

产品尺寸表

蓝江产品型号	适配软管1	适配软管2	适配软管3	包装
Product model	Adapt hose 1	Adapt hose 2	Adapt hose 3	package
PN.	Φ mm	Φ mm	Φ mm	pcs
RQY-3*AD15.8	15.8	15.8	15.8	10
RQY-3*AD18.5	18.5	18.5	18.5	10
RQY-3*AD21.2	21.2	21.2	21.2	10
RQY-3*AD25.0	25	25	25	10
RQY-3*AD28.5	28.5	28.5	28.5	10
RQY-AD15.8/2*13.0	15.8	13	13	10
RQY-AD18.5/2*13.0	18.5	13	13	10
RQY-AD18.5/2*15.8	18.5	15.8	15.8	10
RQY-AD21.2/2*15.8	21.2	15.8	15.8	10
RQY-AD21.2/2*18.5	21.2	18.5	18.5	10
RQY-AD25.0/2*21.2	25.0	21.2	21.2	10
RQY-AD28.5/2*21.2	28.5	21.2	21.2	10
RQY-AD34.5/2*25.0	34.5	25.0	25.0	10
RQY-AD34.5/2*28.5	34.5	28.5	28.5	10
RQY-AD42.5/2*34.5	42.5	34.5	34.5	10
RQY-AD54.5/2*42.5	54.5	42.5	42.5	10



波纹管防水三通接头/T型

Three way waterproof connector/T

品牌：蓝江/Land



材料：尼龙6

温度：-40° C-105° C

性能：T型三通结构设计，防护等级IP68



Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: T-shaped three-way structure design, protection level IP68

产品尺寸表

蓝江产品型号	适配软管1	适配软管2	适配软管3	包装
Product model	Adapt hose 1	Adapt hose 2	Adapt hose 3	package
PN.	Φ mm	Φ mm	Φ mm	pcs
RQT-3*AD15.8	15.8	15.8	15.8	10
RQT-3*AD18.5	18.5	18.5	18.5	10
RQT-3*AD21.2	21.2	21.2	21.2	10
RQT-3*AD25.0	25	25	25	10
RQT-3*AD28.5	28.5	28.5	28.5	10
RQT-3*AD34.5	34.5	34.5	34.5	10
RQT-3*AD42.5	42.5	42.5	42.5	10
RQT-AD18.5/2*15.8	18.5	15.8	15.8	10
RQT-AD21.2/2*15.8	21.2	15.8	15.8	10
RQT-AD21.2/2*18.5	21.2	18.5	18.5	10
RQT-AD25.0/2*21.2	25	21.2	21.2	10
RQT-AD28.5/2*21.2	28.5	21.2	21.2	10
RQT-AD34.5/2*28.5	34.5	28.5	28.5	10
RQT-AD42.5/2*34.5	42.5	34.5	34.5	10
RQT-AD54.5/2*42.5	54.5	42.5	42.5	10

快速三通软管接头

Quick three-way hose connector

品牌：蓝江/Land

材料：尼龙6

温度：-40° C-105° C

性能：Y型三通结构设计，快速锁紧软管

Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Y-shaped three-way structure design, quick locking hose



产品尺寸表

蓝江产品型号	适配波纹管规格		产品尺寸/Product size						
Product model	Adapt hose		B1	B2	B3	C	D	E	F
PN.	BG1	BG2/BG3	mm	mm	mm	mm	mm	mm	mm
PA-RY-13B	AD13	AD10	20.5	17.5	17.5	36.5	68	20	6.5
PA-RY-15B	AD15.8	AD13	23	20.5	20.5	43.7	71	23	6.5
PA-RY-21B	AD21.2	AD15.8	30	23	23	49	87	31	6.5
PA-RY-28B	AD28.5	AD21.2	37	30	30	63	99	38	6.5
PA-RY-34B	AD34.5	AD28.5	44	37	37	77	106	46	6.5
PA-RY-42B	AD42.5	AD34.5	53	44	44	92	126	54	6.5
PA-RY-54B	AD54.5	AD42.5	66.5	53	53	109	130	62	6.5

TPE三通软管接头/Y

TPE three-way hose connector/Y

品牌：蓝江/Land



材料：TPE

温度：-40° C-105° C

性能：Y型三通结构设计，直接插入软管

Brand: Land

Material: TPE

Temperature:- 40° C-105° C

Performance: Y-shaped three-way structure design, directly inserted into the hose



产品尺寸表

蓝江产品型号	产品尺寸/Product size			包装
Product model	适配软管	宽度	总长度	package
PN.	Adapt hose	width	Total length	pcs
RY-3*AD10	AD10	36.5	54.5	10
RY-2*AD10/AD13	2*AD10/AD13	36	63	10
RY-3*AD13	3*AD13	43	65	10
RY-2*AD13/AD15.8	2*AD13/AD15.8	45	66	10
RY-3*AD15.8	3*AD15.8	46	68	10
RY-2*AD15.8/21.2	2*AD15.8/AD21.2	52	75	10
RY-2*AD15.8/28.5	2*AD15.8/AD28.5	52	75	10
RY-3*AD18.5	3*AD18.5	54.5	81	10
RY-3*AD21.2	3*AD21.2	62.5	82.5	10
RY-2*AD21.2/28.5	2*AD15.8/28.5	60.5	68	10
RY-2*AD28.5/34.5	2*AD28.5/AD34.5	77	86	10
RY-2*AD34.5/42.5	2*AD34.5/AD42.5	89	98.5	10
RY-2*AD42.5/54.5	2*AD42.5/AD54.5	109.5	116	10

TPE三通软管接头/T

TPE three-way hose connector/T

品牌：蓝江/Land



材料：TPE

温度：-40° C-105° C

性能：T型三通结构设计，直接插入软管



Brand: Land

Material: TPE

Temperature:- 40° C-105° C

Performance: T-shaped three-way structure design, directly inserted into the hose

产品尺寸表

蓝江产品型号	产品尺寸/Product size			包装
Product model	适配软管	宽度	总长度	package
PN.	Adapt hose	width	Total length	pcs
RT-3*AD10	AD10	32.5	46.5	10
RT-3*AD13	3*AD13	36	51	10
RT-3*AD15.8	3*AD15.8	44	63	10
RT-3*AD18.5	3*AD18.5	48.5	70	10
RT-3*AD21.2	3*AD21.2	50	71	10
RT-2*AD21.2/28.5	2*AD15.8/28.5	51	78	10
RT-3*28.5	3*AD28.5	57	78	10
RT-2*AD28.5/34.5	2*AD28.5/AD34.5	57	83	10
RT-3*AD34.5	3*AD34.5	64	85	10
RT-3*AD42.5	3*AD42.5	74.5	96	10

TPE波纹管尼龙对接头

TPE Bellows docking connector

品牌：蓝江/Land



材料：TPE

温度：-40° C-100° C

性能：快速对接波纹管

应用：机床，照明，安防门禁，轨道交通



Brand: Land

Material: TPE

Temperature:- 40° C-100° C

Performance: Quick docking of corrugated pipes

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	适配软管1	适配软管2	包装数量
Product model	Adapter hose1	Adapter hose 2	quantity
PN.	Φ 1	Φ 2	Pcs/bag
RKC-2*AD10.0	AD10	AD10	50
RKC-2*-AD13.0	AD13	AD13	50
RKC-2*AD15.8	AD15.8	AD15.8	50
RKC-2*AD18.5	AD18.5	AD18.5	50
RKC-2*AD21.2	AD21.2	AD21.2	50
RKC-AD21.2/AD28.5	AD21.2	AD28.5	50
RKC-2*-AD34.5	AD34.5	AD34.5	20
RKC-2*-AD42.5	AD42.5	AD42.5	20
RKC-2*-AD54.5	AD54.5	AD54.5	20

波纹管尼龙对接头

Bellows docking connector

品牌：蓝江/Land

材料：尼龙6

温度：-40° C-105° C

性能：快速对接波纹管，抗拉力强

应用：机床，照明，安防门禁，轨道交通

Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Quick docking of corrugated pipes, strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots



产品尺寸表

蓝江产品型号	适配软管1	适配软管2	包装数量
Product model	Adapter hose1	Adapter hose 2	quantity
PN.	φ 1	φ 2	Pcs/bag
RKC-2*AD10.0	AD10	AD10	50
RKC-AD10.0/AD13.0	AD10	AD13	50
RKC-2*-AD13.0	AD13	AD13	50
RKC-AD13.0/AD15.8	AD13	AD15.8	50
RKC-2*AD15.8	AD15.8	AD15.8	50
RKC-AD15.8/AD18.5	AD15.8	AD18.5	50
RKC-2*AD18.5	AD18.5	AD18.5	50
RKC-AD18.5/AD21.2	AD18.5	AD21.2	50
RKC-2*AD21.2	AD21.2	AD21.2	50
RKC-AD21.2/AD25.0	AD21.2	AD25	50
RKC-AD21.2/AD28.5	AD21.2	AD28.5	50
RKC-AD25.0/AD28.5	AD25	AD28.5	50
RKC-2*-AD34.5	AD34.5	AD34.5	20

抗拉波纹管接头

Tensile hose connector

- 品牌: 蓝江/Land
- 材料: 尼龙6
- 阻燃: UL94V-2 (可定制V0)
- 温度: -40° C-105° C
- 环保: 符合ROHS2.0标准
- 性能: 拧紧式设计, 内置夹紧爪, 抗拉力强

Brand: Land

Material: Nylon 6

Flame retardant: UL94V-2 (customizable V0)

Temperature:- 40° C-105° C

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Tightening design, built-in clamping claws, strong tensile strength



产品尺寸表

蓝江产品型号	螺纹规格	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Adapter hose	Thread diameter	Thread length	quantity
PN.	Metric	AD mm	AG mm	GL mm	Pcs/bag
RL-M12-AD10.0	M12×1.5	AD10	12	9	50
RL-M16-AD10.0	M16×1.5	AD10	16	15	50
RL-M16-AD13.0	M16×1.5	AD13	16	15	50
RL-M16-AD15.8	M16×1.5	AD15.8	16	15	50
RL-M16-AD18.5	M16×1.5	AD18.5	16	15	50
RL-M16-AD21.2	M16×1.5	AD21.2	16	15	50
RL-M20-AD13.0	M20×1.5	AD13	20	15	50
RL-M20-AD15.8	M20×1.5	AD15.8	20	15	50
RL-M20-AD18.5	M20×1.5	AD18.5	20	15	50
RL-M20-AD21.2	M20×1.5	AD21.2	20	15	50
RL-M22-AD15.8	M22×1.5	AD15.8	22	10	50
RL-M22-AD18.5	M22×1.5	AD18.5	22	10	50

RL-M25-AD21.2	M25×1.5	AD21.2	25	15	50
RL-M25-AD25.0	M25×1.5	AD25	25	15	50
RL-M25-AD28.5	M25×1.5	AD28.5	25	15	50
RL-M32-AD34.5	M32×1.5	AD34.5	32	15	20
RL-M40-AD42.5	M40×1.5	AD42.5	40	15	10
RL-M50-AD42.5	M50×1.5	AD42.5	50	15	10
RL-M50-AD54.5	M50×1.5	AD54.5	50	26	10
RL-M63-AD54.5	M63×1.5	AD54.5	63	26	10
RL-PG7-AD10.0	PG7	AD10	12.5	9	50
RL-PG9-AD10.0	PG9	AD10	15.2	9	50
RL-PG9-AD13.0	PG9	AD13	15.2	9	50
RL-PG11-AD13.0	PG11	AD13	18.6	10	50
RL-PG11-AD15.8	PG11	AD15.8	18.6	10	50
RL-PG11-AD18.5	PG11	AD18.5	18.6	10	50
RL-PG13.5-AD15.8	PG13.5	AD15.8	20.4	10	50
RL-PG13.5-AD18.5	PG13.5	AD18.5	20.4	10	50
RL-PG16-AD15.8	PG16	AD15.8	22.5	11	50
RL-PG16-AD18.5	PG16	AD18.5	22.5	11	50
RL-PG16-AD21.2	PG16	AD21.2	22.5	11	50
RL-PG21-AD21.2	PG21	AD21.2	28.3	13	50
RL-PG21-AD25.0	PG21	AD25.0	28.3	13	50
RL-PG21-AD28.5	PG21	AD28.5	28.3	13	50
RL-PG29-AD34.5	PG29	AD34.5	37	13	20
RL-PG36-AD42.5	PG36	AD42.5	47	13	10
RL-PG42-AD42.5	PG42	AD42.5	54	15	10
RL-PG48-AD54.5	PG48	AD54.5	59.3	16	10
RL-G1/4-AD10.0	G1/4	AD10	13.15	9	50
RL-G3/8-AD13.0	G3/8	AD13	16.66	15	50
RL-G1/2-AD15.8	G1/2	AD15.8	20.95	15	50
RL-G1/2-AD18.5	G1/2	AD18.5	20.95	15	50
RL-G1/2-AD21.2	G1/2	AD21.2	20.95	15	50
RL-G3/4-AD21.2	G3/4	AD21.2	26.44	15	50
RL-G3/4-AD25.0	G3/4	AD25.0	26.44	15	50
RL-G3/4-AD28.5	G3/4	AD28.5	26.44	15	50
RL-G1-AD34.5	G1	AD34.5	33.2	15	20
RL-G1-1/4-AD42.5	G1-1/4	AD42.5	41.9	15	10
RL-G1-1/2-AD42.5	G1-1/2	AD42.5	47.8	15	10
RL-G2-AD54.5	G2	AD54.5	59.6	15	10

抗拉波纹管弯头

Tensile hose elbow

品牌：蓝江/Land

材料：尼龙6

环保：符合ROHS2.0标准

性能：弯头拧紧式设计，内置抗拉夹紧爪

应用：机床，照明，安防，轨道交通，机器人



Brand: Land

Material: Nylon 6

Environmental Protection: Compliant with ROHS2.0 standards

Performance: Elbow tightening design with built-in tensile clamping claws

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	螺纹规格	适配软管	螺纹直径	螺纹长度	包装数量
Product model	Thread size	Hose	Thread diameter	Thread length	quantity
PN.	Metric	Φ mm	AG mm	GL mm	Pcs/bag
RLW-M12-AD10.0	M12×1.5	AD10.0	12	8.5	50
RLW-M16-AD13.0	M16×1.5	AD13	16	15	50
RLW-M20-AD15.8	M20×1.5	AD15.8	20	15	50
RLW-M20-AD18.5	M20×1.5	AD18.5	20	15	50
RLW-M20-AD21.2	M20×1.5	AD21.2	20	15	50
RLW-M25-AD21.2	M25×1.5	AD21.2	25	15	50
RLW-M25-AD25.0	M25×1.5	AD25	25	15	50
RLW-M25-AD28.5	M25×1.5	AD28.5	25	15	50
RLW-M32-AD34.5	M32×1.5	AD34.5	32	15	20
RLW-M40-AD42.5	M40×1.5	AD42.5	40	15	10

可打开式双拼管接头

Double splicing hose connector


品牌：蓝江/Land

材料：尼龙6

温度：-40° C-105° C

性能：可打开式设计，锁紧双拼软管

应用：机床，照明，安防，轨道交通，机器人

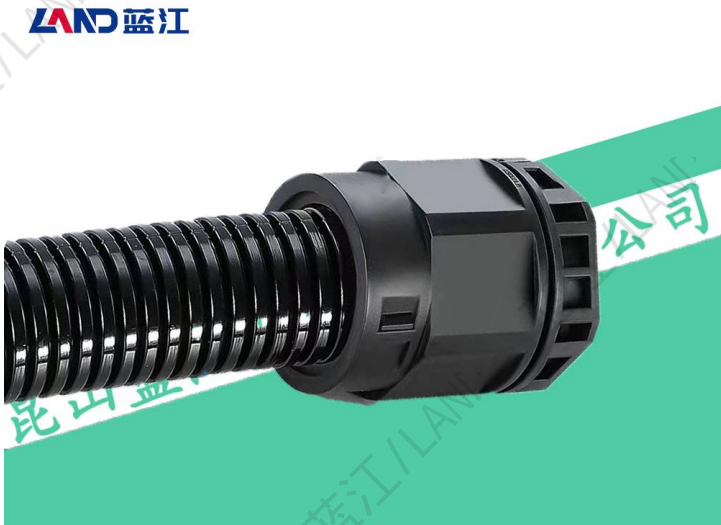

Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Openable design, locking double jointed hose, strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	适配软管	螺纹规格	建议开孔	包装
Product model	Adapt hose	Thread size	hole	package
PN.	mm	mm	feature	PCS
WLK-DPA-M16-P10	8.8*13.5	M16*1.5	16	50
WLK-DPA-M20-P14	13*18.7	M20*1.5	20	50
WLK-DPA-M25-P20	20*25.7	M25*1.5	25	50
WLK-DPA-M32-P23	23.9*31.3	M32*1.5	32	50
WLK-DPA-M40-P37	32.5*43.2	M40*1.5	40	20
WLK-DPA-M50-P45	43.1*54.2	M50*1.5	50	10
WLK-DPA-M72-P70	67.0*79.8	M72*1.5	72	10

大型法兰软管接头(螺丝款)

Large flange hose connector (screw type)

品牌：蓝江/Land



材料：尼龙6

温度：-40° C-105° C

性能：采用螺丝安装，紧固性与抗拉力强

应用：机床，照明，安防，轨道交通，机器人



Brand: Land


Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Made of high-quality nylon, fastened with screws, strong tensile strength



Applications: Machine tools, lighting, security access control, rail transit, robots, etc

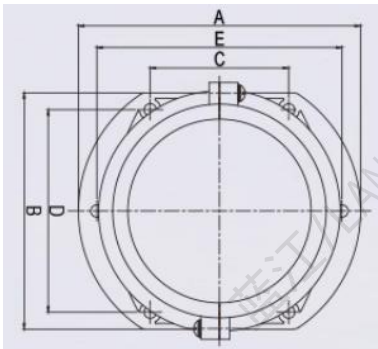

产品尺寸表

蓝江产品型号	适配软管	产品尺寸表						包装
Product model	Adapt hose	A	B	C	D	Φ E	H	package
PN.	mm	mm	mm	mm	mm	mm	mm	PCS
WLK-RGFL-56A	56*67.2	96	80	60	66	/	40	1
WLK-RKFL-70A	70*80.0	112	95	60	80	100	44	1
WLK-RGFL-95A	95*106.0	150	126	74	108	129	50	1
WLK-RGFLW-70A弯头	70*80.0	80	95	60	80	50	98	1

大型法兰软管接头(快扣款)

Large flange hose connector (screw type)

品牌：蓝江/Land

材料：尼龙6

温度：-40° C-105° C

性能：采用快扣式设计，安装快速便捷

应用：机床，照明，安防，轨道交通，机器人

Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Made of high-quality nylon, fastened with screws, strong tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots, etc



产品参数表

数据仅供参考，单位：毫米mm



产品尺寸表

蓝江产品型号	适配软管	产品尺寸表					包装
Product model	Adapt hose	孔距A	孔距B	孔径M	圆心径D	高度H	package
PN.	mm	mm	mm	mm	mm	mm	PCS
FL-56B	56*67.2	65	61	6	64	44	1
FL-70B	70*80.0	80	61	6	73	53	1
FL-90B	90*106	107	75	6	103	53	1

卧式法兰软管接头

Horizontal flange hose connector (quick deduction)

品牌：蓝江/Land



材料：尼龙6

温度：-40° C-105° C

性能：面板螺丝安装，波纹管固定抗拉防扯

应用：机床，照明，安防，轨道交通，机器人



Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Panel screw installation, corrugated pipe fixing for tensile strength

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	适配软管	总长A	总宽B	孔距H	孔距F
Product model	Adapt hose	length	width	pitch	tooth set
PN.	mm	PCS	PCS	PCS	PCS
WLK-FLW-21.2	17*21.2	49	47	37	34
WLK-FLW-28.5	23*28.5	67	65	52	42
WLK-FLW-34.5	28*34.5	90	78	65	65
WLK-FLW-42.5	36*42.5	100	97	80	80
WLK-FLW-54.5	48*54.5	116	101	80	88

波纹管与钢管对接头

Corrugated pipe and steel pipe connector

品牌：蓝江/Land

材料：尼龙6与金属

温度：-40° C-105° C

性能：一端锁紧波纹管，一端连接镀锌管

应用：机床，照明，安防，轨道交通，机器人



Brand: Land

Material: Nylon 6 and Metal

Temperature:- 40° C-105° C

Performance: Connect nylon hose to galvanized pipe

Applications: Machine tools, lighting, security access control, rail transit, robots

产品尺寸表

蓝江产品型号	适配钢管	适配KBG和JDG	螺纹直径	包装数量
Product model	Adapted pipe	Adapted KBG	Thread diameter	quantity
PN.	DN	Φ mm	AG mm	Pcs/bag
RK-DN15-AD13.0	DN15	Φ 20	AD13.0	50
RK-DN15-AD15.8	DN15	Φ 20	AD15.8	51
RK-DN15-AD18.5	DN15	Φ 20	AD18.5	52
RK-DN15-AD21.2	DN15	Φ 20	AD21.2	53
RK-DN20-AD21.2	DN20	Φ 25	AD21.2	54
RK-DN20-AD25.0	DN20	Φ 25	AD25.0	55
RK-DN20-AD28.5	DN20	Φ 25	AD28.5	56
RK-DN25-AD28.5	DN25	Φ 32	AD28.5	57
RK-DN25-AD34.5	DN25	Φ 32	AD34.5	58
RK-DN32-AD34.5	DN32	Φ 40	AD34.5	59
RK-DN32-AD42.5	DN32	Φ 40	AD42.5	60
RK-DN40-AD42.5	DN40	Φ 50	AD42.5	61
RK-DN40-AD54.5	DN40	Φ 50	AD54.5	62
RK-DN50-AD54.5	DN50	Φ 60	AD54.5	63

简易软管固定座/A型

Simple hose fixing seat/A-type

品牌：蓝江/Land

材料：尼龙6

温度：-40° C-105° C

性能：带盖软管固定支架，可快速扣紧软管

Brand: Land

Material: Nylon 6

Temperature:- 40° C-105° C

Performance: Cover hose fixing bracket, can quickly fasten the hose



产品尺寸表

蓝江产品型号	适配软管	长度	高度	螺孔
Product model	Adapt hose	length	height	Mounting Hole
PN.	Φ mm	mm	mm	mm
RGA-AD10.0	AD10.0	30	23	6.5
RGA-AD13.0	AD13.0	30	23	6.5
RGA-AD15.8	AD15.8	30	23	6.5
RGA-AD18.5	AD18.5	35	30	6.5
RGA-AD21.2	AD21.2	35	30	6.5
RGA-AD25.0	AD25.0	35	30	6.5
RGA-AD28.5	AD28.5	42	38	11.5
RGA-AD34.5	AD34.5	51	43	11.5
RGA-AD42.5	AD42.5	61	51	11.5
RGA-AD54.5	AD54.5	74	64	11.5

简易软管固定座/B型

Simple hose fixing seat/B-type

品牌：蓝江/Land

材料：尼龙6

温度：-40℃-105℃

性能：一体式软管固定支架，可快速扣紧软管

Brand: Land

Material: Nylon 6

Temperature:- 40℃-105℃

Performance: Integrated hose fixing bracket, which can quickly fasten the hose

产品尺寸表

蓝江产品型号	适配软管	长度	高度	螺孔
Product model	Adapt hose	length	height	Mounting Hole
PN.	Φ mm	mm	mm	mm
RGB-AD10.0	AD10.0	30	23	6.5
RGB-AD13.0	AD13.0	30	23	6.5
RGB-AD15.8	AD15.8	30	23	6.5
RGB-AD18.5	AD18.5	35	30	6.5
RGB-AD21.2	AD21.2	35	30	6.5
RGB-AD25.0	AD25.0	35	30	6.5
RGB-AD28.5	AD28.5	42	38	11.5
RGB-AD34.5	AD34.5	51	43	11.5
RGB-AD42.5	AD42.5	61	51	11.5
RGB-AD54.5	AD54.5	74	64	11.5



波纹管末端护套

Bellows end sheath



材料: EPDM
温度: -40℃~100℃
说明: 用于波纹管末端

Material: EPDM
Temperature:- 40℃~100℃
Description: Used for the end of corrugated pipes



产品尺寸表

蓝江产品型号	产品尺寸/Product size		
Product model	适配软管	外径	总长度
PN.	Adapt hose	Outer diameter	Total length
HT-AD10.0B	AD10.0	12	14.5
HT-AD13.0B	AD13.0	16	19
HT-AD15.8B	AD15.8	20	20
HT-AD18.5B	AD18.5	20	20
HT-AD21.2B	AD21.2	25	20
HT-AD25.0B	AD25.0	31	25
HT-AD28.5B	AD28.5	31	25
HT-AD34.5B	AD34.5	36.5	26
HT-AD42.5B	AD42.5	45	30
HT-AD54.5B	AD54.5	66	37

波纹管穿线护套

Corrugated pipe threading sheath

材料：改性橡胶

温度：-40℃~100℃

说明：固定于波纹管末端配合出线或密封

Material: EPDM

Temperature:- 40℃~100℃

Description: Fixed at the end of the corrugated tube to match the outlet or seal



产品尺寸表

蓝江产品型号	产品尺寸/Product size		
Product model	适配软管	线径范围	总长度
PN.	Adapt hose	Adapt cable	Total length
DT-AD10.0B	AD10.0	1~8	29
DT-AD13.0B	AD13.0	1~10	32.5
DT-AD15.8B	AD15.8	4~12	36.5
DT-AD18.5B	AD18.5	4~13	37.5
DT-AD21.2B	AD21.2	6~16.5	37.5
DT-AD25.0B	AD25.0	6~21	37.5
DT-AD28.5B	AD28.5	6~23	40.2
DT-AD34.5B	AD34.5	6~29	44.2
DT-AD42.5B	AD42.5	10~37	46
HT-AD54.5B	AD54.5	10~47	52

镀锌金属软管/单扣

Galvanized metal hose/Single buckle

品牌: 蓝江/Land

材料: 热镀锌钢带

结构: 单扣

防腐: 镀锌防腐处理


特性: 本款镀锌金属软管具有良好的柔软与弯曲性能, 内部平滑构造, 穿线方便快捷



Brand: Land

Material: Hot dip galvanized steel strip

Structure: single buckle

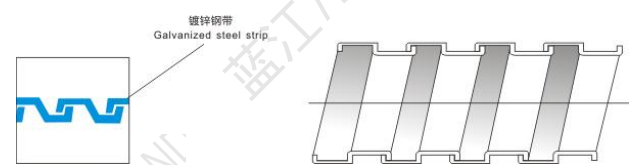

Anti corrosion: Galvanized anti-corrosion treatment

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSH-6	Φ 6	3/16"	8.2±0.3	40	200
JSH-8	Φ 8	1/4"	11.0±0.3	45	100
JSH-10	Φ 10	5/16"	13.5±0.3	55	100
JSH-13	Φ 13	3/8"	15.5±0.35	65	100
JSH-16	Φ 16	1/2"	20.0±0.4	85	100
JSH-20	Φ 20	3/4"	24.3±0.4	100	50
JSH-25	Φ 25	1"	30.3±0.45	115	50
JSH-32	Φ 32	1-1/4"	38.0±0.5	140	25
JSH-38	Φ 38	1-1/2"	45.0±0.6	160	25
JSH-51	Φ 51	2"	58.0±0.6	190	20
JSH-64	Φ 64	2 1/2"	72.5±2.0	280	20
JSH-75	Φ 75	3"	83.5±2.0	320	20
JSH-100	Φ 100	4"	108.5±3.0	380	10
JSH-125	Φ 125	5"	133.0±4.0	460	5
JSH-150	Φ 150	6"	157.0±5.0	500	5

镀锌金属软管/双扣

Galvanized metal hose/Double buckle


品牌：蓝江/Land

材料：热镀锌钢带

结构：双扣

防腐：镀锌防腐处理

特性：本款镀锌金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

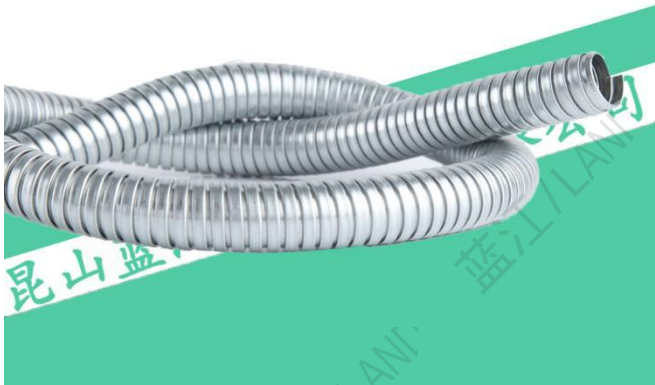


Brand: Land

Material: Hot dip galvanized steel strip

Structure: double buckle

Anti corrosion: Galvanized anti-corrosion treatment

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

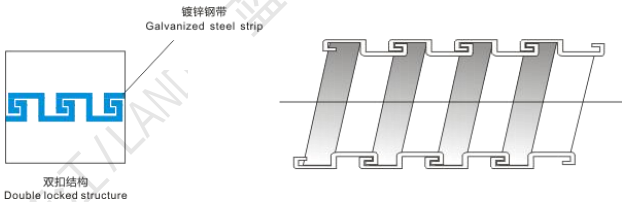

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSHK-10	Φ 10	5/16"	13.5±0.3	50	100
JSHK-13	Φ 13	3/8"	15.5±0.35	70	100
JSHK-16	Φ 16	1/2"	20.0±0.4	82.5	100
JSHK-20	Φ 20	3/4"	24.3±0.4	90	50
JSHK-25	Φ 25	1"	30.3±0.45	100	50
JSHK-32	Φ 32	1-1/4"	38.0±0.5	115	25
JSHK-38	Φ 38	1-1/2"	45.0±0.6	125	25
JSHK-51	Φ 51	2"	58.0±0.8	150	20

包塑镀锌金属软管/单扣

Plastic coated metal hose/Single buckle



品牌：蓝江/Land


材料：热镀锌钢带/外PVC原料

结构：单扣

温度：-10℃至80℃，短时可达100℃

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

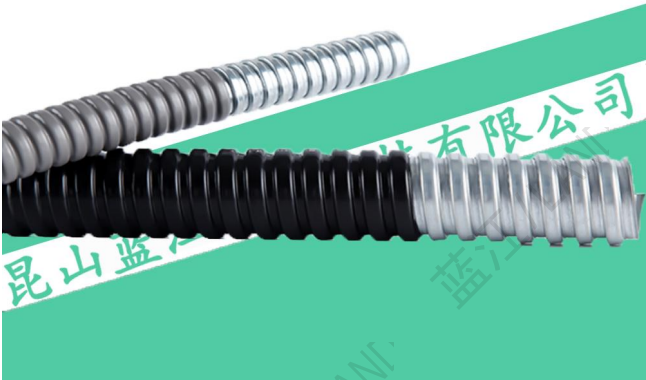


Brand: Land

Material: Hot dip galvanized steel strip

Structure: single buckle

Temperature:- 10 ° C to 80 ° C,

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

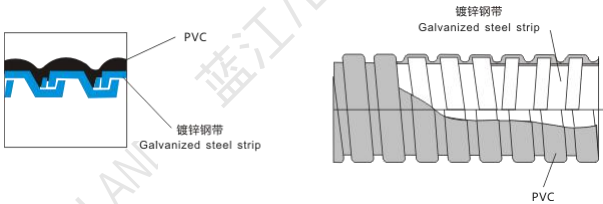

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JS-6B	Φ 6	3/16"	9.0±0.25	40	200
JS-8B	Φ 8	1/4"	11.8±0.3	45	100
JS-10B	Φ 10	5/16"	14.2±0.3	50	100
JS-13B	Φ 13	3/8"	16.5±0.35	70	100
JS-16B	Φ 16	1/2"	20.5±0.4	82.5	100
JS-20B	Φ 20	3/4"	25.7±0.4	90	50
JS-25B	Φ 25	1"	31.7±0.45	100	50
JS-32B	Φ 32	1-1/4"	39.5±0.5	115	25
JS-38B	Φ 38	1-1/2"	46.5±0.6	125	25
JS-51B	Φ 51	2"	60.0±0.8	150	20
JS-64B	Φ 64	2 1/2"	74.1±2.0	215	10
JS-75B	Φ 75	3"	85.1±2.0	240	10
JS-100B	Φ 100	4"	110.1±3.0	325	10
JS-125B	Φ 125	5"	136.0±4.0	460	5
JS-150B	Φ 150	6"	160.0±5.0	500	5

包塑镀锌金属软管/双扣

Plastic coated metal hose/Double buckle



品牌：蓝江/Land


材料：热镀锌钢带/外PVC原料

结构：双扣

温度：-10℃至80℃，短时可达100℃

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

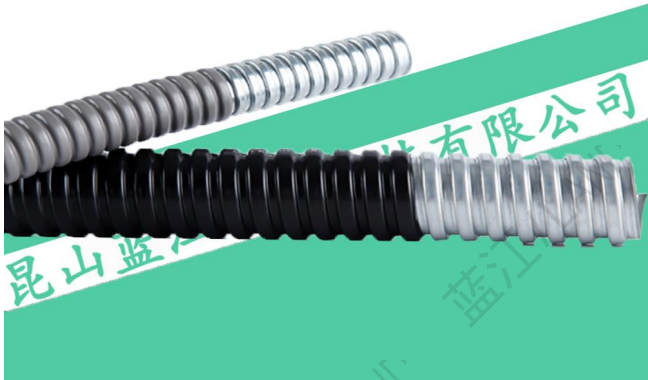

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Structure: Double buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B	Φ 25	1"	31.7±0.45	100	50
JSK-32B	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B	Φ 51	2"	60.0±0.8	150	20

PA包塑镀锌金属软管/双扣

PA coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PA原料


结构：双扣

温度：-10℃至80℃，短时可达100℃

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

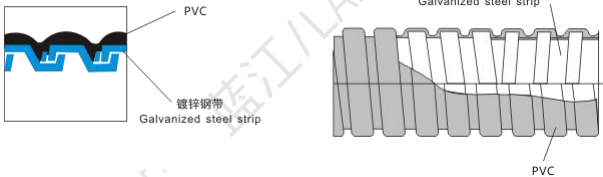

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Structure: Double buckle

Temperature:- 10 ° C to 100 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B/PA	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B/PA	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B/PA	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B/PA	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B/PA	Φ 25	1"	31.7±0.45	100	50
JSK-32B/PA	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B/PA	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B/PA	Φ 51	2"	60.0±0.8	150	20

PU包塑镀锌金属软管/双扣

PU coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PU原料


结构：双扣

温度：-10℃至80℃，短时可达100℃

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

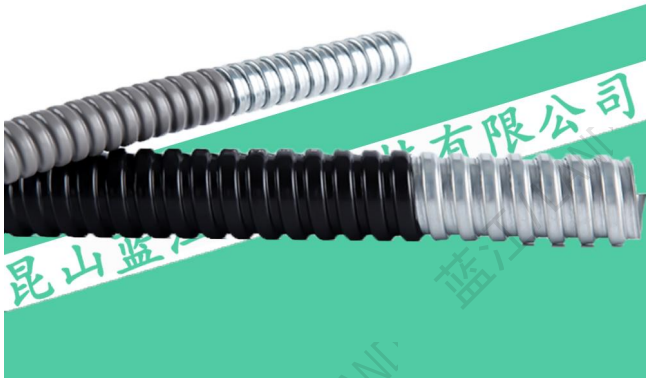

Brand: Land

Material: Hot dip galvanized steel strip/outer PU raw material

Structure: Double buckle

Temperature:- 10 ° C to 100 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B/PU	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B/PU	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B/PU	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B/PU	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B/PU	Φ 25	1"	31.7±0.45	100	50
JSK-32B/PU	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B/PU	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B/PU	Φ 51	2"	60.0±0.8	150	20

PE包塑镀锌金属软管/双扣

PE coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PE原料



结构：双扣

温度：-10℃至80℃，短时可达100℃

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

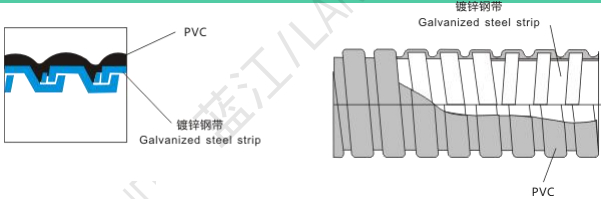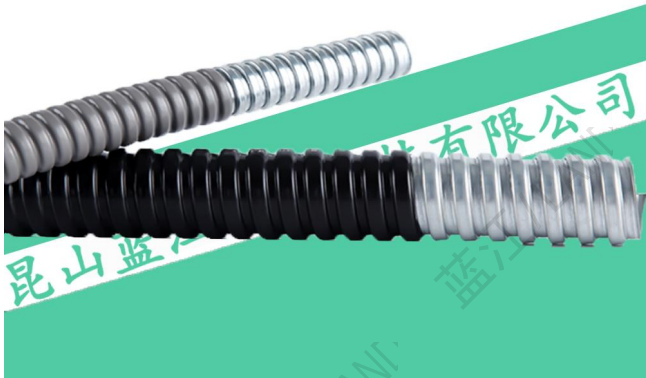

Brand: Land

Material: Hot dip galvanized steel strip/outer PE raw material

Structure: Double buckle

Temperature:- 10 ° C to 100 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B/PE	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B/PE	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B/PE	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B/PE	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B/PE	Φ 25	1"	31.7±0.45	100	50
JSK-32B/PE	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B/PE	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B/PE	Φ 51	2"	60.0±0.8	150	20

平包塑金属软管/单扣

Flat plastic coated metal hose/Single buckle

品牌：蓝江/Land

材料：热镀锌钢带或不锈钢

防护：防水防尘

温度：-10℃至80℃，短时可达100℃

特性：本款平包塑金属软管外表平滑，具有防水，绝缘，抗拉等特性，内部结构平滑，穿线便捷，反扣设计，不易折断及变形

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material


Protection: Waterproof and dustproof

Temperature:- 10 ° C to 80 ° C, customizable for high temperature resistance

Features: This flat plastic metal hose has a smooth appearance, waterproof, insulation, tensile and other characteristics. The internal structure is smooth, easy to thread, and the reverse buckle design is not easy to break or deform

单扣平包塑尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSP-10B	10±0.3	5/16"	15.2±0.5	70	100
JSP-13B	13±0.35	3/8"	18.0±0.5	80	50
JSP-16B	16±0.4	1/2"	21.0±0.5	107	50
JSP-20B	20±0.4	3/4"	26.5±0.5	120	50
JSP-25B	25±0.45	1"	33.1±0.5	130	50
JSP-32B	32±0.5	1-1/4"	42.0±0.6	150	20
JSP-38B	38±0.6	1-1/2"	48.2±0.6	165	20
JSP-51B	51±0.8	2"	60.1±1.0	240	20
JSP-64B	64±2	2-1/2"	72.7±2.0	315	10
JSP-75B	75±2	3"	88.4±2.0	340	10
JSP-100B	100±3	4"	114.0.1±3.0	450	10

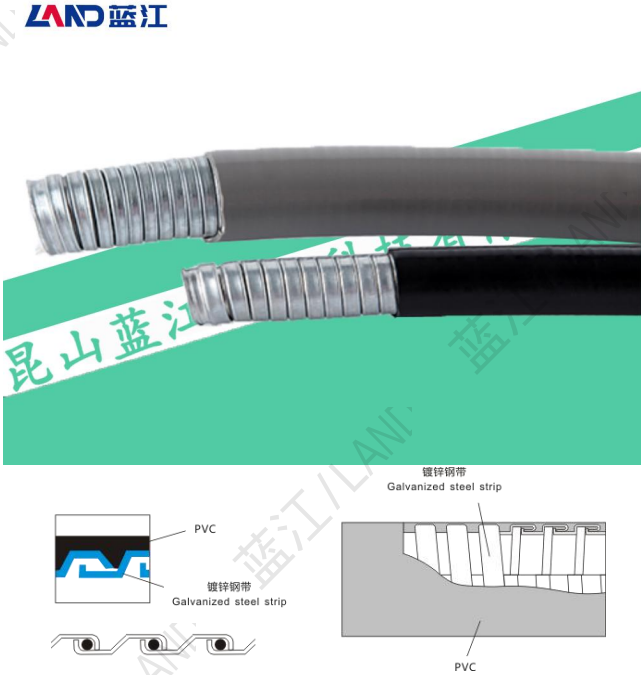

平包塑金属软管/双扣

Flat plastic coated metal hose/Double buckle




品牌：蓝江/Land

材料：可选镀锌或不锈钢

防护：防水防尘

温度：-10℃至80℃，短时可达100℃

特性：本款平包塑金属软管外表平滑，具有防水，
绝缘，抗拉等特性，内部结构平滑，穿线便捷，
反扣设计，不易折断及变形

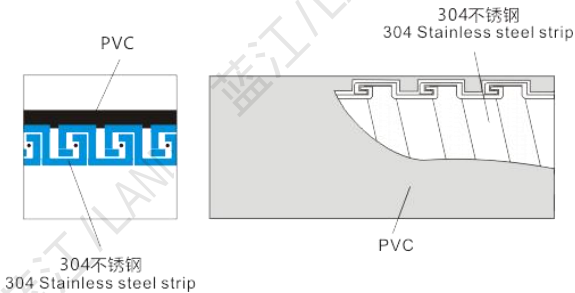

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Protection: Waterproof and dustproof

Temperature:- 10 ° C to 80 ° C, customizable for high temperature resistance

Features: This flat plastic metal hose has a smooth appearance, waterproof, insulation, tensile and other characteristics. The internal structure is smooth, easy to thread, and the reverse buckle design is not easy to break or deform

双扣平包塑尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSKP-10B	10±0.3	5/16"	15.2±0.5	70	100
JSKP-13B	13±0.35	3/8"	18.0±0.5	80	50
JSKP-16B	16±0.4	1/2"	21.0±0.5	107	50
JSKP-20B	20±0.4	3/4"	26.5±0.5	120	50
JSKP-25B	25±0.45	1"	33.1±0.5	130	50
JSKP-32B	32±0.5	1-1/4"	42.0±0.6	150	20
JSKP-38B	38±0.6	1-1/2"	48.2±0.6	165	20
JSKP-51B	51±0.8	2"	60.1±1.0	240	20

304不锈钢金属软管/单扣

304 Stainless steel metal hose/Single buckle


品牌：蓝江/Land

材料：304不锈钢

结构：单扣

防腐：304性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

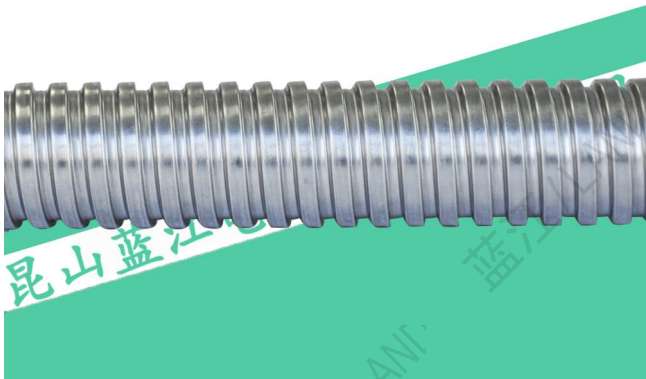


Brand: Land

Material: 304 stainless steel

Structure: single buckle

Anti corrosion: 304 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

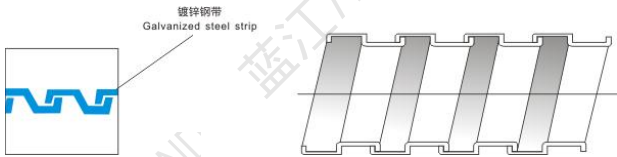

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSH-6-SS	Φ 6	3/16"	8.2±0.3	40	200
JSH-8-SS	Φ 8	1/4"	11.0±0.3	45	100
JSH-10-SS	Φ 10	5/16"	13.5±0.3	55	100
JSH-13-SS	Φ 13	3/8"	15.5±0.35	65	100
JSH-16-SS	Φ 16	1/2"	20.0±0.4	85	100
JSH-20-SS	Φ 20	3/4"	24.3±0.4	100	50
JSH-25-SS	Φ 25	1"	30.3±0.45	115	50
JSH-32-SS	Φ 32	1-1/4"	38.0±0.5	140	25
JSH-38-SS	Φ 38	1-1/2"	45.0±0.6	160	25
JSH-51-SS	Φ 51	2"	58.0±0.8	190	20
JSH-64-SS	Φ 64	2 1/2"	72.5±2.0	280	20
JSH-75-SS	Φ 75	3"	83.5±2.0	320	20
JSH-100-SS	Φ 100	4"	108.5±3.0	380	10

304 不锈钢金属软管/双扣

304 Stainless steel metal hose





品牌：蓝江/Land

材料：304不锈钢

结构：双扣

防腐：304性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

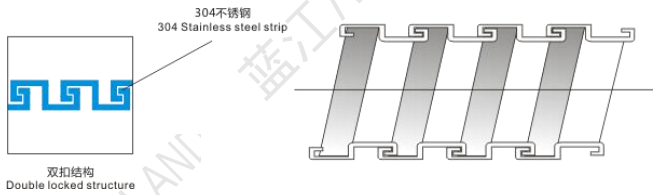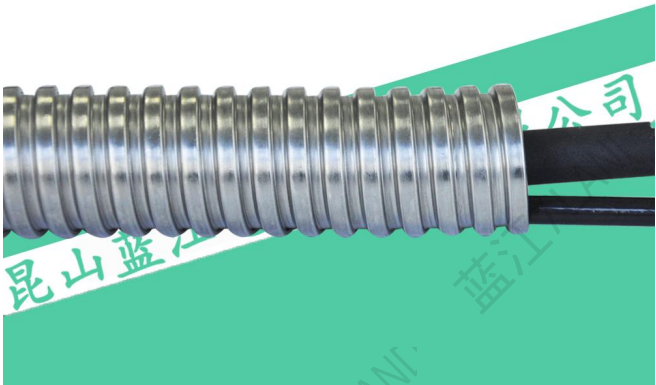

Brand: Land

Material: 304 stainless steel

Structure: Double buckle

Anti corrosion: 304 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSHK-10-SS	Φ 10	5/16"	13.0±0.5	55	100
JSHK-13-SS	Φ 13	3/8"	16.0±0.5	65	100
JSHK-16-SS	Φ 16	1/2"	18.5±0.5	85	100
JSHK-20-SS	Φ 20	3/4"	24.3±0.5	100	50
JSHK-25-SS	Φ 25	1"	30.0±0.5	120	50
JSHK-32-SS	Φ 32	1-1/4"	39.0±0.5	150	25
JSHK-38-SS	Φ 38	1-1/2"	44.0±0.5	180	25
JSHK-51-SS	Φ 51	2"	56.0±0.5	220	20

316不锈钢金属软管/单扣

316 Stainless steel metal hose/Single buckle

品牌：蓝江/Land




材料：316不锈钢

结构：单扣

防腐：316性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

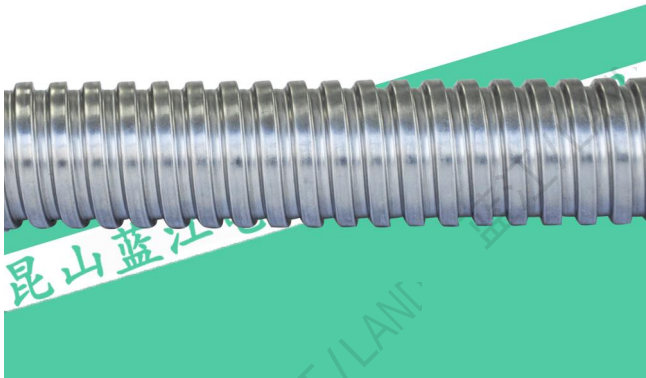


Brand: Land

Material: 316 stainless steel

Structure: single buckle

Anti corrosion: 316 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

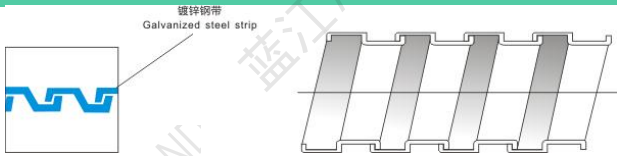

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSH-6-S316	Φ 6	3/16"	8.2±0.3	40	200
JSH-8-S316	Φ 8	1/4"	11.0±0.3	45	100
JSH-10-S316	Φ 10	5/16"	13.5±0.3	55	100
JSH-13-S316	Φ 13	3/8"	15.5±0.35	65	100
JSH-16-S316	Φ 16	1/2"	20.0±0.4	85	100
JSH-20-S316	Φ 20	3/4"	24.3±0.4	100	50
JSH-25-S316	Φ 25	1"	30.3±0.45	115	50
JSH-32-S316	Φ 32	1-1/4"	38.0±0.5	140	25
JSH-38-S316	Φ 38	1-1/2"	45.0±0.6	160	25
JSH-51-S316	Φ 51	2"	58.0±0.8	190	20
JSH-64-S316	Φ 64	2 1/2"	72.5±2.0	280	20
JSH-75-S316	Φ 75	3"	83.5±2.0	320	20
JSH-100-S316	Φ 100	4"	108.5±3.0	380	10

316不锈钢金属软管/双扣

316 Stainless steel metal hose

品牌：蓝江/Land




材料：316不锈钢

结构：双扣

防腐：316性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

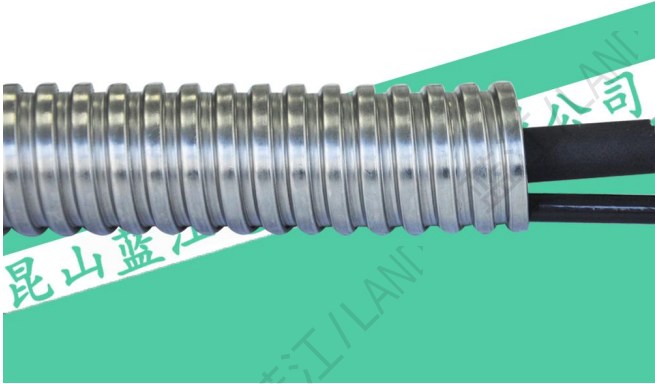


Brand: Land

Material: 316 stainless steel

Structure: Double buckle

Anti corrosion: 316 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

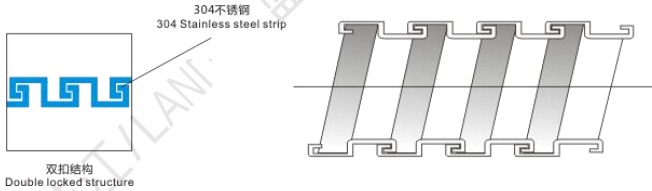

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSHK-10-S316	Φ 10	5/16"	13.0±0.5	55	100
JSHK-13-S316	Φ 13	3/8"	16.0±0.5	65	100
JSHK-16-S316	Φ 16	1/2"	18.5±0.5	85	100
JSHK-20-S316	Φ 20	3/4"	24.3±0.5	100	50
JSHK-25-S316	Φ 25	1"	30.0±0.5	120	50
JSHK-32-S316	Φ 32	1-1/4"	39.0±0.5	150	25
JSHK-38-S316	Φ 38	1-1/2"	44.0±0.5	180	25
JSHK-51-S316	Φ 51	2"	56.0±0.5	220	20

304不锈钢包塑软管/单扣

304 Stainless steel metal hose/Single buckle

品牌：蓝江/Land




材料：304不锈钢/外PVC原料

结构：单扣

温度：-10℃至80℃，短时可达100℃

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

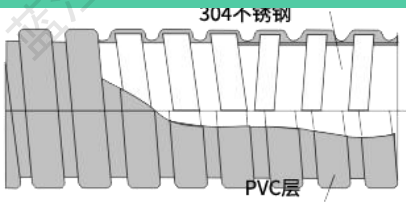

Brand: Land

Material: 304 stainless steel/outer PVC

Structure: single buckle

Temperature:- 10 ° C to 80 ° C

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JS-6B-SS	Φ 6	3/16"	9.0±0.25	40	200
JS-8B-SS	Φ 8	1/4"	11.8±0.3	45	100
JS-10B-SS	Φ 10	5/16"	14.2±0.3	50	100
JS-13B-SS	Φ 13	3/8"	16.5±0.35	70	100
JS-16B-SS	Φ 16	1/2"	20.5±0.4	82.5	100
JS-20B-SS	Φ 20	3/4"	25.7±0.4	90	50
JS-25B-SS	Φ 25	1"	31.7±0.45	100	50
JS-32B-SS	Φ 32	1-1/4"	39.5±0.5	115	25
JS-38B-SS	Φ 38	1-1/2"	46.5±0.6	125	25
JS-51B-SS	Φ 51	2"	60.0±0.8	150	20
JS-64B-SS	Φ 64	2 1/2"	74.1±2.0	215	10
JS-75B-SS	Φ 75	3"	85.1±2.0	240	10
JS-100B-SS	Φ 100	4"	110.1±3.0	325	10

304不锈钢包塑软管/双扣

304 Stainless steel metal hose/Double buckle

品牌：蓝江/Land

材料：304不锈钢/外PVC原料

结构：双扣

温度：-10℃至80℃，短时可达100℃

颜色：黑色、灰色

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷



Brand: Land

Material: 304 stainless steel/outer PVC

Structure: single or double buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.



产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B-SS	10±0.3	5/16"	14.2±0.3	50	100
JSK-13B-SS	13±0.35	3/8"	16.5±0.35	70	100
JSK-16B-SS	16±0.4	1/2"	20.5±0.4	82.5	100
JSK-20B-SS	20±0.4	3/4"	25.7±0.4	90	50
JSK-25B-SS	25±0.45	1"	31.7±0.45	100	50
JSK-32B-SS	32±0.5	1-1/4"	39.5±0.5	115	25
JSK-38B-SS	38±0.6	1-1/2"	46.5±0.6	125	25
JSK-51B-SS	51±0.8	2"	60±0.8	150	20

316不锈钢包塑软管/单扣

316 Stainless steel metal hose/Single buckle

品牌：蓝江/Land



材料：316不锈钢/外PVC原料

结构：单扣

温度：-10℃至80℃，短时可达100℃

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷




Brand: Land

Material: 316 stainless steel/outer PVC

Structure: single buckle

Temperature:- 10 ° C to 80 ° C

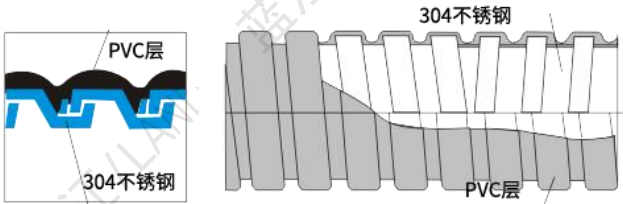

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JS-6B-S316	Φ 6	3/16"	9.0±0.25	40	200
JS-8B-S316	Φ 8	1/4"	11.8±0.3	45	100
JS-10B-S316	Φ 10	5/16"	14.2±0.3	50	100
JS-13B-S316	Φ 13	3/8"	16.5±0.35	70	100
JS-16B-S316	Φ 16	1/2"	20.5±0.4	82.5	100
JS-20B-S316	Φ 20	3/4"	25.7±0.4	90	50
JS-25B-S316	Φ 25	1"	31.7±0.45	100	50
JS-32B-S316	Φ 32	1-1/4"	39.5±0.5	115	25
JS-38B-S316	Φ 38	1-1/2"	46.5±0.6	125	25
JS-51B-S316	Φ 51	2"	60.0±0.8	150	20
JS-64B-S316	Φ 64	2 1/2"	74.1±2.0	215	10
JS-75B-S316	Φ 75	3"	85.1±2.0	240	10
JS-100B-S316	Φ 100	4"	110.1±3.0	325	10

316不锈钢包塑软管/双扣

316 Stainless steel metal hose/Double buckle

品牌：蓝江/Land

材料：316不锈钢/外PVC原料

结构：双扣

温度：-10℃至80℃，短时可达100℃

颜色：黑色、灰色

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷



Brand: Land

Material: 316 stainless steel/outer PVC

Structure: single or double buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.



产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B-S316	10±0.3	5/16"	14.2±0.3	50	100
JSK-13B-S316	13±0.35	3/8"	16.5±0.35	70	100
JSK-16B-S316	16±0.4	1/2"	20.5±0.4	82.5	100
JSK-20B-S316	20±0.4	3/4"	25.7±0.4	90	50
JSK-25B-S316	25±0.45	1"	31.7±0.45	100	50
JSK-32B-S316	32±0.5	1-1/4"	39.5±0.5	115	25
JSK-38B-S316	38±0.6	1-1/2"	46.5±0.6	125	25
JSK-51B-S316	51±0.8	2"	60±0.8	150	20

TPU包塑金属软管

TPU coated metal hose

品牌：蓝江/Land



材料：内可选镀锌及不锈钢，外改性TPU材质

防护：防水防尘

温度：-10℃至80℃，短时可达100℃

特性：TPU包塑软管具有低烟无卤，防水，绝缘，抗拉等特性，产品内部平滑，穿线便捷，防火阻燃，柔韧性好，被广泛应用于机器人，轨道交通，工业自动化，照明安防等行业



Brand: Land

Material: Internally available galvanized and stainless steel, externally TPU

Protection: Waterproof and dustproof

Temperature:- 10 ° C to 80 ° C, customizable for high temperature resistance

Features: TPU coated hose has the characteristics of low smoke and halogen-free, waterproof, insulation, tensile strength, etc. The product is smooth inside, easy to thread, fire-resistant and flame-retardant, and has good flexibility. It is widely used in industries such as robotics, rail transit, industrial automation, lighting and security

TPU包塑软管尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
TPU-10B-SS	10±0.3	5/16"	14.2±0.3	50	100
TPU-13B-SS	13±0.35	3/8"	16.5±0.35	70	100
TPU-16B-SS	16±0.4	1/2"	20.5±0.4	82	100
TPU-20B-SS	20±0.4	3/4"	25.7±0.4	90	50
TPU-25B-SS	25±0.45	1"	31.7±0.45	100	50
TPU-32B-SS	32±0.5	1-1/4"	39.5±0.5	115	25
TPU-38B-SS	38±0.6	1-1/2"	46.5±0.6	125	25
TPU-51B-SS	51±0.8	2"	60.0±0.8	150	20

不锈钢编织管

Stainless steel braided tube

品牌：蓝江/Land

材料：内部为JSH软管，外不锈钢编织

防护：防水防尘

温度：-10℃至80℃，短时可达100℃

特性：增强耐磨，耐热，抗拉等特性



Brand: Blue River/Land

Material: Internal JSH hose, external stainless steel braided

Protection: Waterproof and dustproof

Temperature: -10 ° C to 80 ° C, short-term up to 100 ° C

Features: Enhanced wear resistance, heat resistance, tensile strength, and other properties

TPU包塑软管尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSG-10-SS	10±0.3	5/16"	14.5±0.3	30	100
JSG-13-SS	13±0.35	3/8"	17±0.35	50	100
JSG-16-SS	16±0.4	1/2"	21±0.4	55	100
JSG-20-SS	20±0.4	3/4"	26±0.4	75	50
JSG-25-SS	25±0.45	1"	31.7±0.45	102	50
JSG-32-SS	32±0.5	1-1/4"	39.5±0.5	180	25
JSG-38-SS	38±0.6	1-1/2"	46.5±0.6	190	25
JSG-51-SS	51±0.8	2"	60.0±0.8	230	20

端接式锌合金软管接头

DPJ Zinc alloy hose connector

品牌: 蓝江/Land

LAND 蓝江

材料: A.C.F为锌合金, B.E丁腈橡胶, D为铁皮制成

螺纹: M牙, PG牙, G(PF)牙, NPT牙

防护: IP65

温度: -40°C至100°C



特性: 加厚型锌合金镀锌或镀铬, 外形美观, 结构

紧密, 强度高, 软管护套与软管相扣接紧设计, 装

配省时便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐

酸碱, 酒精, 油脂等一般溶剂

定制: 除选型手册规格外, 可按照要求定制螺纹大小

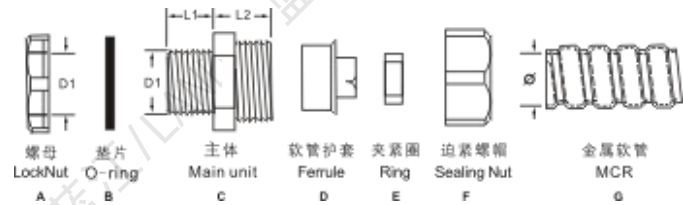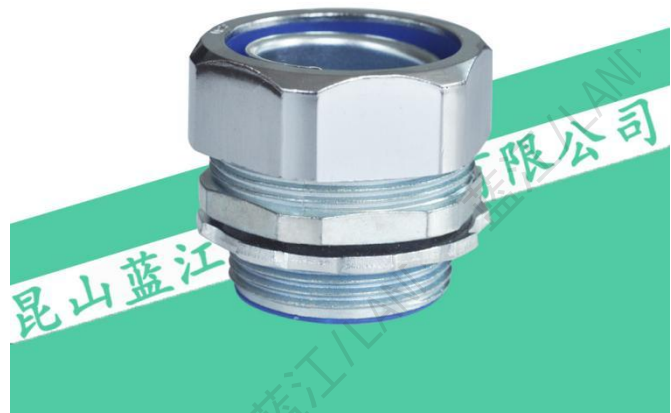

Brand: Land

Material: A. C. F zinc alloy, B. E nitrile rubber, D iron sheet

Threads: M thread, PG thread, G (PF) thread, NPT thread

Protection: IP65

Temperature: -40 ° C to 100 ° C

Features: Thickened zinc alloy galvanized or chrome plated, with a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, is waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements


产品尺寸表

蓝江产品型号	适配软管	螺纹尺寸	螺纹长度	扳手尺寸	包装
Product model	Adapt hose	Thread size	Thread length	Wrench Size	quantity
PN.	Φ mm	M/G/NPT	GL mm	cap mm	Pcs/bag
DPJ-M16-10	Φ 10	M16×1.5	9	22	50
DPJ-M20-12	Φ 12	M20×1.5	10	26	50
DPJ-M20-15	Φ 15	M20×1.5	10	30	50
DPJ-M24-15	Φ 15	M24×1.5	11	30	50
DPJ-M25-20	Φ 20	M25×1.5	12	35	50
DPJ-M27-20	Φ 20	M27×2.0	12	35	50
DPJ-M30-20	Φ 20	M30×2.0	12	35	50
DPJ-M32-25	Φ 25	M32×1.5	15	43	50
DPJ-M33-25	Φ 25	M33×2.0	15	43	50
DPJ-M36-25	Φ 25	M36×2.0	15	43	50
DPJ-M36-32	Φ 32	M36×2.0	15	52	20
DPJ-M40-32	Φ 32	M40×1.5	15	52	20
DPJ-M42-32	Φ 32	M42×2.0	15	52	20
DPJ-M48-32	Φ 32	M48×2.0	15	52	20
DPJ-M48-38	Φ 38	M48×2.0	15	60	20
DPJ-M50-38	Φ 38	M50×1.5	18	60	10
DPJ-M60-51	Φ 51	M60×2.0	20	71	10
DPJ-M63-51	Φ 51	M63×1.5	20	71	10
DPJ-G3/8-10	Φ 10	G3/8	7	22	50
DPJ-G3/8-12	Φ 12	G3/8	10	26	50
DPJ-G1/2-15	Φ 15	G1/2	10	30	50
DPJ-G3/4-20	Φ 20	G3/4	12	35	50
DPJ-G1-25	Φ 25	G1	14	43	50
DPJ-G1-1/4-32	Φ 32	G1-1/4	14	52	20
DPJ-G1-1/2-38	Φ 38	G1-1/2	16	60	10
DPJ-G2-51	Φ 51	G2	16	71	10
DPJ-NPT1/2-15	Φ 15	NPT1/2	10	30	50
DPJ-NPT3/4-20	Φ 20	NPT3/4	12	35	50
DPJ-NPT1-25	Φ 25	NPT1	14	43	50

内螺纹锌合金软管接头

DNJ Zinc alloy hose connector

- 品牌：蓝江/Land
- 材料：C.F为锌合金，E丁腈橡胶，D为铁皮制成
- 防护：IP65
- 温度：-40℃至100℃
- 特性：加厚型锌合金镀锌或镀铬，外形美观

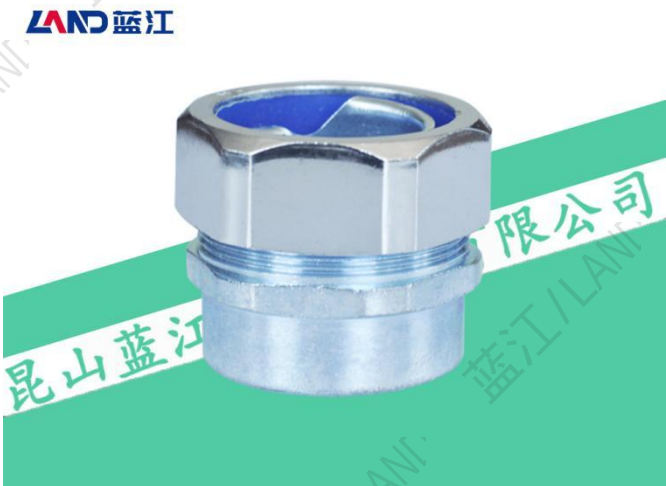

- Brand: Land
- Material: C. F zinc alloy, E nitrile rubber, D iron sheet
- Protection: IP65
- Temperature:-40 ° C to 100 ° C
- Features: Thickened zinc alloy galvanized or chrome plated, with beautiful appearance

产品尺寸表

蓝江产品型号	适配软管	螺纹尺寸	螺纹长度	扳手尺寸
Product model	Adapt hose	Thread size	Thread length	Wrench Size
PN.	Φ mm	M/G/NPT	GL mm	cap mm
DNJ-M16-10	Φ 10	M16×1.5	24	50
DNJ-M20-12	Φ 12	M20×1.5	27	50
DNJ-M20-15	Φ 15	M20×1.5	30	50
DNJ-M20-20	Φ 20	M20×1.5	36	50
DNJ-M25-20	Φ 20	M25×1.5	36	50
DNJ-M32-25	Φ 25	M32×1.5	42	50
DNJ-M40-32	Φ 32	M40×1.5	52	20
DNJ-M50-38	Φ 38	M50×1.5	60	10
DNJ-M63-51	Φ 51	M63×1.5	75	10
DNJ-G3/8-10	Φ 10	G3/8	24	50
DNJ-G3/8-12	Φ 12	G3/8	26	50
DNJ-G1/2-15	Φ 15	G1/2	30	50
DNJ-G3/4-20	Φ 20	G3/4	36	50
DNJ-G1-25	Φ 25	G1	42	50
DNJ-G1-1/4-32	Φ 32	G1-1/4	52	20
DNJ-G1-1/2-38	Φ 38	G1-1/2	60	10
DNJ-G2-51	Φ 51	G2	75	10

卡套式锌合金软管接头

DKJ Zinc alloy hose connector

品牌：蓝江/Land

材料：C.F为锌合金，E丁腈橡胶，D为铁皮制成

温度：-40℃至100℃


特性：加厚型锌合金镀锌或镀铬，外形美观

Brand: Land

Material: C. F zinc alloy, E nitrile rubber

Temperature:-40 ° C to 100 ° C

Features: Thickened zinc alloy galvanized or chrome plated, with beautiful appearance

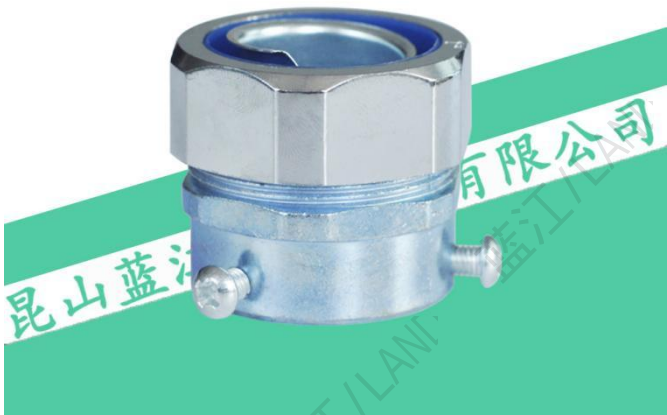

公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DKJ-G3/8-12	Φ 12	#12	17×2.25	#15	15.87×1.6
DKJ-G1/2-15	Φ 15	#15	21.25×2.75	#20	19.05×1.6
DKJ-G3/4-20	Φ 20	#20	26.75×2.75	#25	25.4×1.8
DKJ-G1-25	Φ 25	#25	33.5×3.35	#32	31.75×1.8
DKJ-G1-1/4-32	Φ 32	#32	42.25×3.25	#40	38.1×1.8
DKJ-G1-1/2-38	Φ 38	#40	48×3.35	#50	50.8×1.8
DKJ-G2-51	Φ 51	#50	60×3.5	#70	63.5×2.5
DKJ-G2-1/2-64	Φ 64	#70	75.5×3.75	#80	76.2×3.2

英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DKJ-G3/8-12	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DKJ-G1/2-15	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DKJ-G3/4-20	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DKJ-G1-25	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DKJ-G1-1/4-32	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DKJ-G1-1/2-38	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DKJ-G2-51	2"	2"	60×3.5	2-1/2"	63.5×2.5
DKJ-G2-1/2-64	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

自固式锌合金软管接头

DGJ Zinc alloy hose connector

品牌：蓝江/Land

材料：B.D.G为锌合金，C.F丁腈橡胶，E为铁皮制成

温度：-40℃至100℃


特性：加厚型锌合金镀锌或镀铬，外形美观

Brand: Land

Material: C. F zinc alloy, E nitrile rubber

Temperature:-40 ° C to 100 ° C

Features: Thickened zinc alloy galvanized or chrome plated, with beautiful appearance

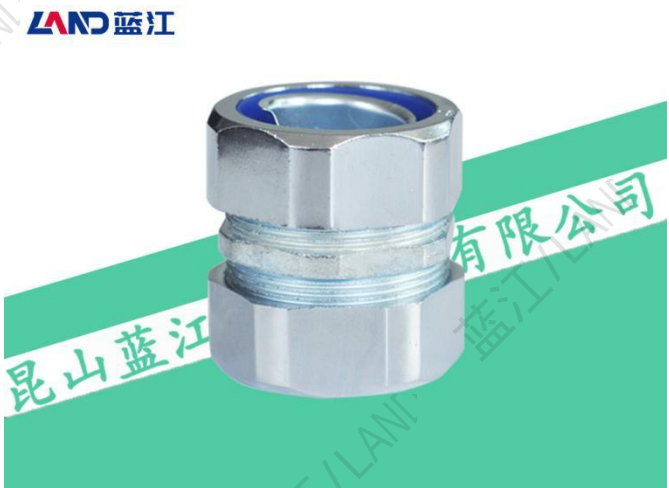

公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DGJ-G3/8-12	Φ 12	#12	17×2.25	#15	15.87×1.6
DGJ-G1/2-15	Φ 15	#15	21.25×2.75	#20	19.05×1.6
DGJ-G3/4-20	Φ 20	#20	26.75×2.75	#25	25.4×1.8
DGJ-G1-25	Φ 25	#25	33.5×3.35	#32	31.75×1.8
DGJ-G1-1/4-32	Φ 32	#32	42.25×3.25	#40	38.1×1.8
DGJ-G1-1/2-38	Φ 38	#40	48×3.35	#50	50.8×1.8
DGJ-G2-51	Φ 51	#50	60×3.5	#70	63.5×2.5
DGJ-G2-1/2-64	Φ 64	#70	75.5×3.75	#80	76.2×3.2

英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DGJ-G3/8-12	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DGJ-G1/2-15	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DGJ-G3/4-20	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DGJ-G1-25	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DGJ-G1-1/4-32	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DGJ-G1-1/2-38	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DGJ-G2-51	2"	2"	60×3.5	2-1/2"	63.5×2.5
DGJ-G2-1/2-64	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

90度弯角式锌合金软管接头

90 degree angled zinc alloy hose elbow

品牌：蓝江/Land



材料：A.C.F为锌合金，B.E为NBR，D为铁皮

防护：IP65

温度：-40℃至100℃

特性：90度弯角设计，外形美观，装配省时便利



产品尺寸表

蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread diameter	Thread length	quantity
PN.	Φ mm	M	AG mm	GL mm	Pcs/bag
DWJ90-M16-10	Φ 10	M16×1.5	16	10	50
DWJ90-M20-12	Φ 12	M20×1.5	20	10	50
DWJ90-M20-15	Φ 15	M20×1.5	20	12	50
DWJ90-M20-20	Φ 20	M20×1.5	20	12	50
DWJ90-M25-20	Φ 20	M25×1.5	25	12	50
DWJ90-M32-25	Φ 25	M32×1.5	32	15	20
DWJ90-M40-32	Φ 32	M40×1.5	40	15	10
DWJ90-M50-38	Φ 38	M50×1.5	50	16	10
DWJ90-M63-51	Φ 51	M63×1.5	63	16	10
DWJ90-G3/8-10	Φ 10	G3/8	16.65	10	50
DWJ90-G3/8-12	Φ 12	G3/8	16.65	10	50
DWJ90-G1/2-15	Φ 15	G1/2	20.95	12	50
DWJ90-G3/4-20	Φ 20	G3/4	26.44	12	50
DWJ90-G1-25	Φ 25	G1	33.24	15	20
DWJ90-G1-1/4-32	Φ 32	G1-1/4	41.91	15	10
DWJ90-G1-1/2-38	Φ 38	G1-1/2	47.8	15	10
DWJ90-G2-51	Φ 51	G2	59.61	15	10
DWJ90-NPT3/8-10	Φ 10	NPT3/8	16.65	10	50
DWJ90-NPT3/8-12	Φ 12	NPT3/8	16.65	10	50
DWJ90-NPT1/2-15	Φ 15	NPT1/2	20.85	12	50
DWJ90-NPT3/4-20	Φ 20	NPT3/4	26.3	12	50
DWJ90-NPT1-25	Φ 25	NPT1	33.15	15	20
DWJ90-NPT1-1/4-32	Φ 32	NPT1-1/4	41.85	15	10
DWJ90-NPT1-1/2-38	Φ 38	NPT1-1/2	47.75	15	10
DWJ90-NPT2-51	Φ 51	NPT2	59.55	15	10

45度弯角式锌合金软管接头

45 degree angled zinc alloy hose elbow

品牌：蓝江/Land



材料：A.C.F为锌合金，B.E为NBR，D为铁皮

防护：IP65

温度：-40℃至100℃

特性：90度弯角设计，外形美观，装配省时便利



产品尺寸表

蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread diameter	Thread length	quantity
PN.	Φ mm	M	AG mm	GL mm	Pcs/bag
DWJ45-M16-10	Φ 10	M16×1.5	16	10	50
DWJ45-M20-12	Φ 12	M20×1.5	20	10	50
DWJ45-M20-15	Φ 15	M20×1.5	20	12	50
DWJ45-M20-20	Φ 20	M20×1.5	20	12	50
DWJ45-M25-20	Φ 20	M25×1.5	25	12	50
DWJ45-M32-25	Φ 25	M32×1.5	32	15	20
DWJ45-M40-32	Φ 32	M40×1.5	40	15	10
DWJ45-M50-38	Φ 38	M50×1.5	50	16	10
DWJ45-M63-51	Φ 51	M63×1.5	63	16	10
DWJ45-G3/8-10	Φ 10	G3/8	16.65	10	50
DWJ45-G3/8-12	Φ 12	G3/8	16.65	10	50
DWJ45-G1/2-15	Φ 15	G1/2	20.95	12	50
DWJ45-G3/4-20	Φ 20	G3/4	26.44	12	50
DWJ45-G1-25	Φ 25	G1	33.24	15	20
DWJ45-G1-1/4-32	Φ 32	G1-1/4	41.91	15	10
DWJ45-G1-1/2-38	Φ 38	G1-1/2	47.8	15	10
DWJ45-G2-51	Φ 51	G2	59.61	15	10
DWJ45-NPT3/8-10	Φ 10	NPT3/8	16.65	10	50
DWJ45-NPT3/8-12	Φ 12	NPT3/8	16.65	10	50
DWJ45-NPT1/2-15	Φ 15	NPT1/2	20.85	12	50
DWJ45-NPT3/4-20	Φ 20	NPT3/4	26.3	12	50
DWJ45-NPT1-25	Φ 25	NPT1	33.15	15	20
DWJ45-NPT1-1/4-32	Φ 32	NPT1-1/4	41.85	15	10
DWJ45-NPT1-1/2-38	Φ 38	NPT1-1/2	47.75	15	10
DWJ45-NPT2-51	Φ 51	NPT2	59.55	15	10

RG型带锁紧不锈钢软管接头

RG locking stainless steel hose connector

品牌：蓝江/Land

材料：A.C.F.G.I为不锈钢，B.E为EPDM，D尼龙

螺纹：M牙、G（PF）牙、NPT牙

防护：IP68


温度：-40℃至100℃

特性：带锁紧软管与电缆设计，外形美观，结构紧

密，软管护套与软管相扣设计，配合锁紧接头，安

装便捷，抗拉力强，另可防水，防尘，抗盐，耐油脂

LAND 蓝江

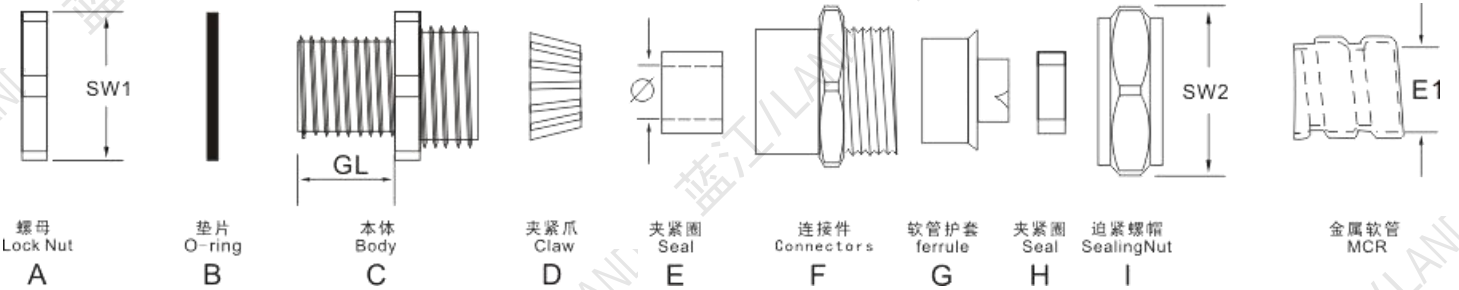

Brand: Land

Material: A. C.F.G.I is stainless steel, B.E is EPDM, D nylon

Threads: M thread, G (PF) thread, NPT thread

Protection: IP68

Temperature: -40 ° C to 100 ° C

Features: Designed with locking hose and cable, it has a beautiful appearance and tight structure. The hose sheath is designed to be interlocked with the hose, and it is matched with a locking joint for easy installation. It has strong tensile strength and can also be waterproof, dustproof, salt resistant, grease resistant, etc

产品尺寸表/M

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装
Product model	Thread size	Cable range	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RG6-M12-08-SS	M12×1.5	4~8	Φ 6	9	50
RG6-M12-05-SS	M12×1.5	3~5.5	Φ 6	9	50
RG10-M12-08-SS	M12×1.5	4~8	Φ 10	9	50
RG10-M16-10-SS	M16×1.5	6~10	Φ 10	9.5	50
RG10-M18-10-SS	M18×1.5	6~10	Φ 10	9.5	50
RG12-M20-12-SS	M20×1.5	7~12	Φ 12	12	50
RG15-M20-14-SS	M20×1.5	8~14	Φ 15	12	50
RG20-M20-14-SS	M20×1.5	8~14	Φ 20	12	50
RG15-M22-14-SS	M22×1.5	8~14	Φ 15	12	50
RG15-M24-14-SS	M24×1.5	8~14	Φ 15	10.5	50
RG20-M25-18-SS	M25×1.5	13~18	Φ 20	12	20
RG25-M25-18-SS	M25×1.5	13~18	Φ 25	12	20
RG20-M27-18-SS	M27×1.5	13~18	Φ 20	12	20
RG20-M30-18-SS	M30×2.0	13~18	Φ 20	12.5	20
RG25-M32-25-SS	M32×1.5	18~25	Φ 25	12.5	20
RG32-M32-25-SS	M32×1.5	18~25	Φ 32	12.5	20
RG25-M36-25-SS	M36×2.0	18~25	Φ 25	13	20
RG32-M40-32-SS	M40×1.5	25~31	Φ 32	14	10
RG38-M40-32-SS	M40×1.5	25~31	Φ 38	14	10
RG32-M42-32-SS	M42×2.0	25~31	Φ 32	15	10
RG32-M48-32-SS	M48×2.0	25~31	Φ 32	15	10
RG38-M50-41-SS	M50×1.5	33~41	Φ 38	15	10
RG51-M50-41-SS	M50×1.5	33~41	Φ 51	15	10
RG51-M60-44-SS	M60×2.0	36~44	Φ 51	15	10
RG51-M63-54-SS	M63×1.5	46~54	Φ 51	15	10

产品尺寸表/G(PF)/NPT

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装
Product model	Thread size	Cable range	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RG6-G1/4-05-SS	G1/4	3~5.5	Φ 6	9	50
RG8-G1/4-08-SS	G1/4	4~8	Φ 8	9	50
RG10-G3/8-10-SS	G3/8	6~10	Φ 10	9.5	50
RG12-G1/2-12-SS	G1/2	7~12	Φ 12	12	50
RG15-G1/2-12-SS	G1/2	7~12	Φ 15	12	50
RG15-G1/2-14-SS	G1/2	8~14	Φ 15	12	50
RG20-G3/4-18-SS	G3/4	13~18	Φ 20	12	20
RG25-G3/4-18-SS	G3/4	13~18	Φ 25	12	20
RG25-G1-25-SS	G1	18~25	Φ 25	15	20
RG32-G1-25-SS	G1	18~25	Φ 32	15	20
RG32-G1-1/4-31-SS	G1-1/4	25~31	Φ 32	15	10
RG32-G1-1/2-31-SS	G1-1/2	25~31	Φ 32	15	10
RG38-G1-1/2-41-SS	G1-1/2	33~41	Φ 38	15	10
RG51-G2-44-SS	G2	36~44	Φ 51	15	10
RG6-NPT1/4-05-SS	NPT1/4	3~5.5	Φ 6	9	50
RG8-NPT1/4-08-SS	NPT1/4	4~8	Φ 8	9	50
RG10-NPT3/8-10-SS	NPT3/8	6~10	Φ 10	9.5	50
RG12-NPT1/2-12-SS	NPT1/2	7~12	Φ 15	12	50
RG15-NPT1/2-12-SS	NPT1/2	7~12	Φ 15	12	50
RG15-NPT1/2-14-SS	NPT1/2	8~14	Φ 15	12	50
RG20-NPT3/4-18-SS	NPT3/4	13~18	Φ 20	12	20
RG25-NPT3/4-18-SS	NPT3/4	13~18	Φ 25	12	20
RG25-NPT1-25-SS	NPT1	18~25	Φ 25	15	20
RG32-NPT1-25-SS	NPT1	18~25	Φ 32	15	20
RG32-NPT1-1/4-31-SS	NPT1-1/4	25~31	Φ 32	15	10
RG32-NPT1-1/2-31-SS	NPT1-1/2	25~31	Φ 32	15	10
RG38-NPT1-1/2-41-SS	NPT1-1/2	33~41	Φ 38	15	10
RG51-NPT2-44-SS	NPT2	36~44	Φ 51	15	10

DPJ端接式不锈钢软管接头

DPJ stainless steel hose connector

品牌: 蓝江/Land



材料: A.C.D.F为不锈钢, B.E为硅胶

螺纹: M牙, G(PF)牙, NPT牙

防护: IP68

温度: -40°C至100°C



特性: 304或316不锈钢制成, 外形美观, 结构紧密,

强度高, 软管护套与软管相扣接紧设计, 装配省时

便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐酸碱,

酒精, 油脂等一般溶剂

定制: 除选型手册规格外, 可按照要求定制螺纹大小

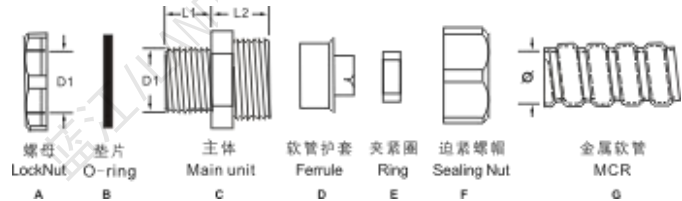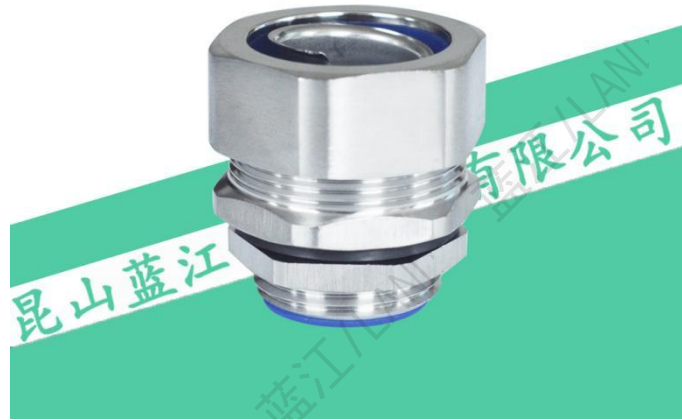

Brand: Land

Material: A. C.D.F is stainless steel, B.E is EPDM rubber

Threads: M thread, G (PF) thread, NPT thread

Protection: IP68

Temperature: -40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, it has a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements

产品尺寸表M/G(PF)/NPT

蓝江产品型号	适配软管	公制螺纹	螺纹长度	扳手尺寸	包装
Product model	Adapt hose	M Thread	Thread length	Wrench Size	quantity
PN.	Φ mm	M	GL mm	cap mm	Pcs/bag
DPJ-M12-06-SS	Φ 6	M12×1.5	8.5	18	50
DPJ-M12-08-SS	Φ 8	M12×1.5	8.5	20	50
DPJ-M16-10-SS	Φ 10	M16×1.5	10	24	50
DPJ-M20-12-SS	Φ 12	M20×1.5	10	27	50
DPJ-M20-15-SS	Φ 15	M20×1.5	12	30	50
DPJ-M20-20-SS	Φ 20	M20×1.5	12	36	50
DPJ-M25-20-SS	Φ 20	M25×1.5	12	36	50
DPJ-M25-25-SS	Φ 25	M25×1.5	12	42	50
DPJ-M32-25-SS	Φ 25	M32×1.5	15	42	20
DPJ-M32-32-SS	Φ 32	M32×1.5	15	52	20
DPJ-M40-32-SS	Φ 32	M40×1.5	15	52	10
DPJ-M50-38-SS	Φ 38	M50×1.5	16	60	10
DPJ-M63-51-SS	Φ 51	M63×1.5	16	75	5
DPJ-G3/8-10-SS	Φ 10	G3/8	10	24	50
DPJ-G3/8-12-SS	Φ 12	G3/8	10	26	50
DPJ-G1/2-15-SS	Φ 15	G1/2	12	30	50
DPJ-G3/4-20-SS	Φ 20	G3/4	12	36	50
DPJ-G1-25-SS	Φ 25	G1	15	42	20
DPJ-G1-1/4-32-SS	Φ 32	G1-1/4	15	52	10
DPJ-G1-1/2-38-SS	Φ 38	G1-1/2	15	60	10
DPJ-G2-51-SS	Φ 51	G2	15	75	5
DPJ-NPT3/8-10-SS	Φ 10	NPT3/8	10	24	50
DPJ-NPT3/8-12-SS	Φ 12	NPT3/8	10	26	50
DPJ-NPT1/2-15-SS	Φ 15	NPT1/2	12	30	50
DPJ-NPT3/4-20-SS	Φ 20	NPT3/4	12	36	50
DPJ-NPT1-25-SS	Φ 25	NPT1	15	42	20
DPJ-NPT1-1/4-32-SS	Φ 32	NPT1-1/4	15	52	10
DPJ-NPT1-1/2-38-SS	Φ 38	NPT1-1/2	15	60	10
DPJ-NPT2-51-SS	Φ 51	NPT2	15	75	5

DNJ内牙式不锈钢软管接头

DNJ stainless steel hose connector

品牌: 蓝江/Land

材料: C.D.F为不锈钢, E为硅胶

螺纹: M牙, G(PF)牙, NPT牙

防护: IP68

温度: -40°C至100°C

特性: 304或316不锈钢制成, 外形美观, 结构紧密,

强度高, 软管护套与软管相扣接紧设计, 装配省时

便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐酸碱,

酒精, 油脂等一般溶剂

定制: 除选型手册规格外, 可按照要求定制螺纹大小

Brand: Land

Material: C. D. F is stainless steel, E is silicone

Threads: M thread, G (PF) thread, NPT thread



Protection: IP68

Temperature: -40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, it has a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements

LAND 蓝江

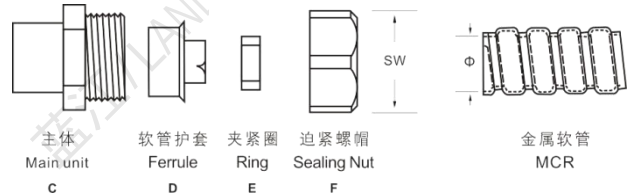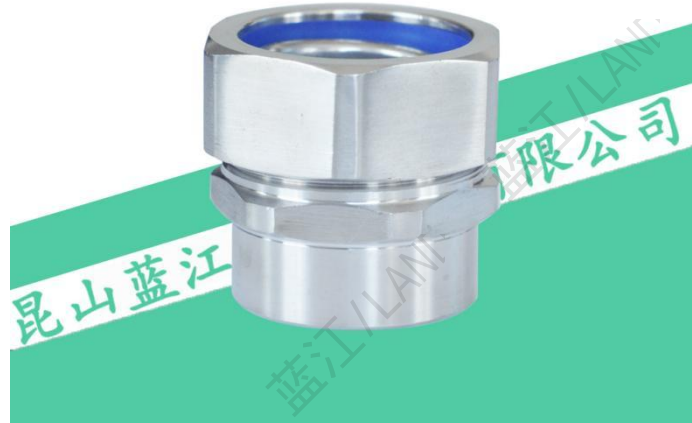

产品尺寸表M/G(PF)/NPT

蓝江产品型号	适配软管	内螺纹	扳手尺寸	包装
Product model	Adapt hose	F Thread	Wrench Size	quantity
PN.	Φ mm	F	cap mm	Pcs/bag
DNJ-G3/8-10-SS	Φ 10	G3/8	24	50
DNJ-G3/8-12-SS	Φ 12	G3/8	26	50
DNJ-G1/2-15-SS	Φ 15	G1/2	30	50
DNJ-G3/4-20-SS	Φ 20	G3/4	36	50
DNJ-G1-25-SS	Φ 25	G1	42	20
DNJ-G1-1/4-32-SS	Φ 32	G1-1/4	52	10
DNJ-G1-1/2-38-SS	Φ 38	G1-1/2	60	10
DNJ-G2-51-SS	Φ 51	G2	75	5
DNJ-M16-10-SS	Φ 10	M16×1.5	24	50
DNJ-M20-12-SS	Φ 12	M20×1.5	27	50
DNJ-M20-15-SS	Φ 15	M20×1.5	30	50
DNJ-M20-20-SS	Φ 20	M20×1.5	36	50
DNJ-M25-20-SS	Φ 20	M25×1.5	36	50
DNJ-M32-25-SS	Φ 25	M32×1.5	42	20
DNJ-M40-32-SS	Φ 32	M40×1.5	52	10
DNJ-M50-38-SS	Φ 38	M50×1.5	60	10
DNJ-M63-51-SS	Φ 51	M63×1.5	75	5
DNJ-NPT3/8-10-SS	Φ 10	NPT3/8	24	50
DNJ-NPT3/8-12-SS	Φ 12	NPT3/8	26	50
DNJ-NPT1/2-15-SS	Φ 15	NPT1/2	30	50
DNJ-NPT3/4-20-SS	Φ 20	NPT3/4	36	50
DNJ-NPT1-25-SS	Φ 25	NPT1	42	20
DNJ-NPT1-1/4-32-SS	Φ 32	NPT1-1/4	52	10
DNJ-NPT1-1/2-38-SS	Φ 38	NPT1-1/2	60	10
DNJ-NPT2-51-SS	Φ 51	NPT2	75	5

DKJ卡套式不锈钢软管接头

DKJ stainless steel hose connector



品牌：蓝江/Land

材料：C.D.F为不锈钢，E为硅胶

温度：-40℃至100℃

特性：304或316不锈钢制成，外形美观，结构紧密



英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt	Thick steel pipe	external diameter/wal	Thin steel	external diameter/wal	quantity
PN.	φ mm					Pcs/bag
DKJ-G3/8-12-SS	φ 12	#12	17×2.25	#15	15.87×1.6	50
DKJ-G1/2-15-SS	φ 15	#15	21.25×2.75	#20	19.05×1.6	50
DKJ-G3/4-20-SS	φ 20	#20	26.75×2.75	#25	25.4×1.8	50
DKJ-G1-25-SS	φ 25	#25	33.5×3.35	#32	31.75×1.8	20
DKJ-G1-1/4-32-SS	φ 32	#32	42.25×3.25	#40	38.1×1.8	10
DKJ-G1-1/2-38-SS	φ 38	#40	48×3.35	#50	50.8×1.8	10
DKJ-G2-51-SS	φ 51	#50	60×3.5	#70	63.5×2.5	10
DKJ-G2-1/2-64-SS	φ 64	#70	75.5×3.75	#80	76.2×3.2	5

公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick steel pipe	external diameter/wal	Thin steel	external diameter/wal	quantity
PN.	φ mm					Pcs/bag
DKJ-G3/8-12-SS	3/8"	3/8"	17×2.25	1/2"	15.87×1.6	50
DKJ-G1/2-15-SS	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6	50
DKJ-G3/4-20-SS	3/4"	3/4"	26.75×2.75	1"	25.4×1.8	50
DKJ-G1-25-SS	1"	1"	33.5×3.35	1-1/4"	31.75×1.8	20
DKJ-G1-1/4-32-SS	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8	10
DKJ-G1-1/2-38-SS	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8	10
DKJ-G2-51-SS	2"	2"	60×3.5	2-1/2"	63.5×2.5	10
DKJ-G2-1/2-64-SS	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2	5

DGJ卡套式不锈钢软管接头

DGJ stainless steel hose connector



品牌：蓝江/Land

材料：B.D.E.F为不锈钢，F为硅胶

温度：-40℃至100℃

特性：304或316不锈钢制成，外形美观，结构紧密



公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick pipe	Pipe size	Thin pipe	Pipe size	quantity
PN.	mm	mm	mm	mm	mm	Pcs/bag
DGJ-G3/8-12-SS	φ 12	#12	17×2.25	#15	15.87×1.6	50
DGJ-G1/2-15-SS	φ 15	#15	21.25×2.75	#20	19.05×1.6	50
DGJ-G3/4-20-SS	φ 20	#20	26.75×2.75	#25	25.4×1.8	50
DGJ-G1-25-SS	φ 25	#25	33.5×3.35	#32	31.75×1.8	20
DGJ-G1-1/4-32-SS	φ 32	#32	42.25×3.25	#40	38.1×1.8	10
DGJ-G1-1/2-38-SS	φ 38	#40	48×3.35	#50	50.8×1.8	10
DGJ-G2-51-SS	φ 51	#50	60×3.5	#70	63.5×2.5	10
DGJ-G2-1/2-64-SS	φ 64	#70	75.5×3.75	#80	76.2×3.2	5

英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick pipe	Pipe size	Thin pipe	Pipe size	quantity
PN.	mm	mm	mm	mm	mm	Pcs/bag
DGJ-G3/8-12-SS	3/8"	3/8"	17×2.25	1/2"	15.87×1.6	50
DGJ-G1/2-15-SS	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6	50
DGJ-G3/4-20-SS	3/4"	3/4"	26.75×2.75	1"	25.4×1.8	50
DGJ-G1-25-SS	1"	1"	33.5×3.35	1-1/4"	31.75×1.8	20
DGJ-G1-1/4-32-SS	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8	10
DGJ-G1-1/2-38-SS	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8	10
DGJ-G2-51-SS	2"	2"	60×3.5	2-1/2"	63.5×2.5	10
DGJ-G2-1/2-64-SS	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2	5

弯角不锈钢软管弯头

DWJ stainless steel hose connector

品牌: 蓝江/Land

LAND 蓝江

材料: A.C.D.F为不锈钢, B.E为硅胶

外形: 90度或者45度弯角

防护: IP68

温度: -40°C至100°C


特性: 304或316不锈钢制成, 外形美观, 结构紧密

, 强度高, 软管护套与软管相扣接紧设计, 装配省

时便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐酸碱

, 酒精, 油脂等一般溶剂

定制: 除选型手册规格外, 可按照要求定制螺纹

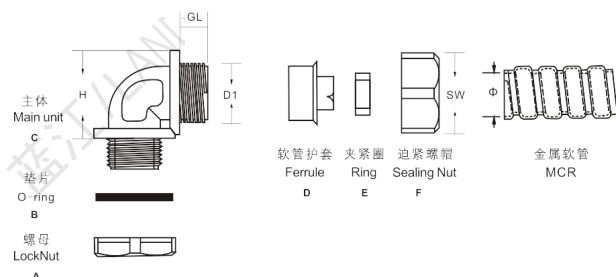

Brand: Land

Material: B. D.E.F is stainless steel, F is silicone


shape: 90 degrees and 45 degrees

Protection: IP65

Temperature: -40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, it has a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements

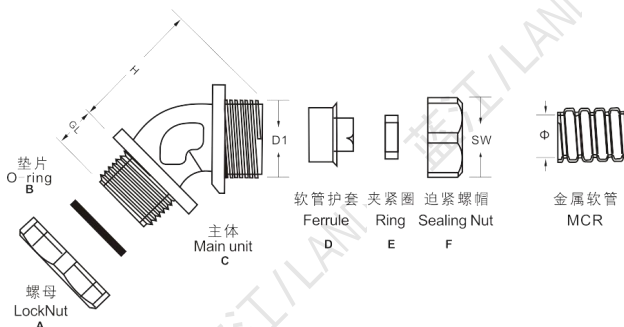

产品尺寸表M/G (PF) /NPT

蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread diameter	Thread length	quantity
PN.	Φ mm	M	AG mm	GL mm	Pcs/bag
DWJ-M16-10-SS	Φ 10	M16×1.5	16	10	50
DWJ-M20-12-SS	Φ 12	M20×1.5	20	10	50
DWJ-M20-15-SS	Φ 15	M20×1.5	20	12	50
DWJ-M20-20-SS	Φ 20	M20×1.5	20	12	50
DWJ-M25-20-SS	Φ 20	M25×1.5	25	12	50
DWJ-M32-25-SS	Φ 25	M32×1.5	32	15	20
DWJ-M40-32-SS	Φ 32	M40×1.5	40	15	10
DWJ-M50-38-SS	Φ 38	M50×1.5	50	16	10
DWJ-M63-51-SS	Φ 51	M63×1.5	63	16	5
DWJ-G3/8-10-SS	Φ 10	G3/8	16.65	10	50
DWJ-G3/8-12-SS	Φ 12	G3/8	16.65	10	50
DWJ-G1/2-15-SS	Φ 15	G1/2	20.95	12	50
DWJ-G3/4-20-SS	Φ 20	G3/4	26.44	12	50
DWJ-G1-25-SS	Φ 25	G1	33.24	15	20
DWJ-G1-1/4-32-SS	Φ 32	G1-1/4	41.91	15	10
DWJ-G1-1/2-38-SS	Φ 38	G1-1/2	47.8	15	10
DWJ-G2-51-SS	Φ 51	G2	59.61	15	5
DWJ-NPT3/8-10-SS	Φ 10	NPT3/8	16.65	10	50
DWJ-NPT3/8-12-SS	Φ 12	NPT3/8	16.65	10	50
DWJ-NPT1/2-15-SS	Φ 15	NPT1/2	20.85	12	50
DWJ-NPT3/4-20-SS	Φ 20	NPT3/4	26.3	12	50
DWJ-NPT1-25-SS	Φ 25	NPT1	33.15	15	20
DWJ-NPT1-1/4-32-SS	Φ 32	NPT1-1/4	41.85	15	10
DWJ-NPT1-1/2-38-SS	Φ 38	NPT1-1/2	47.75	15	10
DWJ-NPT2-51-SS	Φ 51	NPT2	59.55	15	5

DPJ端接式铜镀镍软管接头

DPJ Nickel Plated Brass hose connector



品牌：蓝江/Land

材料：A.C.F为铜镀镍，B.E为橡胶，D为铁皮

温度：-40℃至100℃

特性：黄铜镀镍制成，外形美观，结构紧密



产品尺寸表M/G(PF)/NPT

蓝江产品型号	适配软管	公制螺纹	螺纹长度	扳手尺寸	包装
Product model	Adapt hose	M Thread	Thread length	Wrench Size	quantity
PN.	φ mm	M	GL mm	cap mm	Pcs/bag
DPJ-M16B-10	φ 10	M16×1.5	10	24	50
DPJ-M20B-12	φ 12	M20×1.5	10	27	50
DPJ-M20B-15	φ 15	M20×1.5	12	30	50
DPJ-M20B-20	φ 20	M20×1.5	12	36	50
DPJ-M25B-20	φ 20	M25×1.5	12	36	50
DPJ-M32B-25	φ 25	M32×1.5	15	42	20
DPJ-M40B-32	φ 32	M40×1.5	15	52	10
DPJ-M50B-38	φ 38	M50×1.5	16	60	10
DPJ-M63B-51	φ 51	M63×1.5	16	75	5
DPJ-G3/8B-10	φ 10	G3/8	10	24	50
DPJ-G3/8B-12	φ 12	G3/8	10	26	50
DPJ-G1/2B-15	φ 15	G1/2	12	30	50
DPJ-G3/4B-20	φ 20	G3/4	12	36	50
DPJ-G1B-25	φ 25	G1	15	42	20
DPJ-G1-1/4B-32	φ 32	G1-1/4	15	52	10
DPJ-G1-1/2B-38	φ 38	G1-1/2	15	60	10
DPJ-G2B-51	φ 51	G2	15	75	5
DPJ-NPT3/8B-10	φ 10	NPT3/8	10	24	50
DPJ-NPT3/8B-12	φ 12	NPT3/8	10	26	50
DPJ-NPT1/2B-15	φ 15	NPT1/2	12	30	50
DPJ-NPT3/4B-20	φ 20	NPT3/4	12	36	50
DPJ-NPT1B-25	φ 25	NPT1	15	42	20
DPJ-NPT1-1/4B-32	φ 32	NPT1-1/4	15	52	10
DPJ-NPT1-1/2B-38	φ 38	NPT1-1/2	15	60	10
DPJ-NPT2B-51	φ 51	NPT2	15	75	5

RG型带锁紧铜镀镍软管接头

RG locking Nickel Plated Brass hose connector



品牌：蓝江/Land

材料：A.C.F.I为铜镀镍，B.E橡胶，D尼龙，G铁皮

温度：-40℃至100℃

特性：带锁紧软管与电缆，外形美观，结构紧密



产品尺寸表M/G (PF)

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装
Product model	Thread size	Cable range	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RG8-M12-08	M12×1.5	4~8	Φ 8	6	50
RG8-M16-10	M16×1.5	6~10	Φ 8	7	50
RG10-M16-10	M16×1.5	6~10	Φ 10	7	50
RG12-M20-12	M20×1.5	7~12	Φ 12	7	50
RG15-M20-14	M20×1.5	8~14	Φ 15	7	50
RG20-M20-14	M20×1.5	8~14	Φ 20	7	50
RG15-M24-14	M24×1.5	8~14	Φ 15	8	50
RG20-M25-18	M25×1.5	13~18	Φ 20	8	50
RG25-M25-18	M25×1.5	13~18	Φ 25	8	50
RG25-M32-25	M32×1.5	18~25	Φ 25	9	20
RG32-M40-32	M40×1.5	25~32	Φ 32	10	10
RG38-M50-38	M50×1.5	30~38	Φ 38	12	10
RG51-M63-44	M63×1.5	36~44	Φ 51	12	10
RG64-M75-66	M75×1.5 (2)	60~66	Φ 64	15	1
RG75-M90-77	M90×1.5 (2)	70~77	Φ 75	15	1
RG15-G1/2-14	G1/2	8~14	Φ 15	8	50
RG20-G3/4-18	G3/4	13~18	Φ 20	8	50
RG25-G1-25	G1	18~25	Φ 25	9	20
RG32-G1-1/4-28	G1-1/4	22~28	Φ 32	10	10
RG38-G1-1/2-38	G1-1/2	30~38	Φ 38	10	10
RG51-G2-44	G2	36~44	Φ 51	12	10
RNPT15-NPT1/2-14	NPT1/2	8~14	Φ 15	8	50
RNPT20-NPT3/4-18	NPT3/4	13~18	Φ 20	8	50
RNPT25-NPT1-25	NPT1	18~25	Φ 25	9	20
RNPT32-NPT1-1/4-28	NPT1-1/4	22~28	Φ 32	10	10
RNPT38-NPT1-1/2-38	NPT1-1/2	30~38	Φ 38	10	10
RNPT51-NPT2-44	NPT2	36~44	Φ 51	12	10

DPJ端接式尼龙软管接头

DPJ Nylon hose connector


品牌：蓝江/Land

材料：尼龙配合三元乙丙橡胶

螺纹：M牙，G(PF)牙，PG牙

温度：-40℃至100℃

特性：外形美观，抗拉力强，结构精密

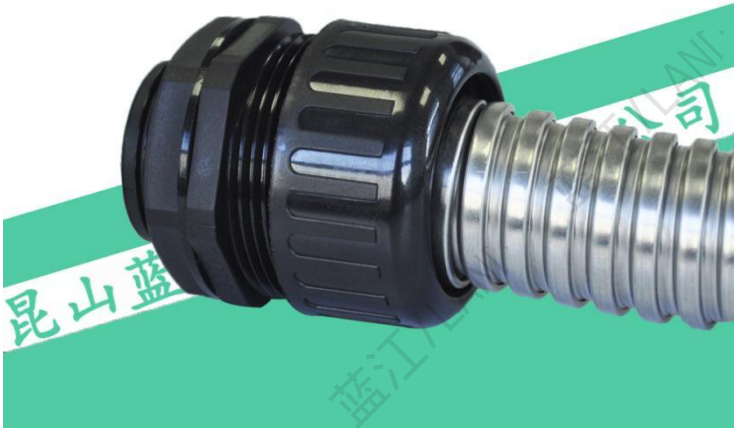

产品尺寸表M/G(PF)/PG

蓝江产品型号	适配软管	公制螺纹	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread length	quantity
PN.	Φ mm	M	GL mm	Pcs/bag
RJ-M16-10B	Φ 10	M16×1.5	15	50
RJ-M16-12B	Φ 12	M16×1.5	15	50
RJ-M20-15B	Φ 15	M20×1.5	15	50
RJ-M25-20B	Φ 20	M25×1.5	15	50
RJ-M32-25B	Φ 25	M32×1.5	15	20
RJ-M40-32B	Φ 32	M40×1.5	15	10
RJ-M50-38B	Φ 38	M50×1.5	15	10
RJ-M63-51B	Φ 51	M63×1.5	25	10
RJ-G1/2-10B	Φ 10	G1/2	15	50
RJ-G1/2-12B	Φ 12	G1/2	15	50
RJ-G1/2-15B	Φ 15	G1/2	15	50
RJ-G3/4-20B	Φ 20	G3/4	15	50
RJ-G1-25B	Φ 25	G1	15	20
RJ-G1-1/4-32B	Φ 32	G1-1/4	15	10
RJ-G1-1/2-38B	Φ 38	G1-1/2	15	10
RJ-G2-51B	Φ 51	G2	15	10
RJ-PG16-10B	Φ 10	PG16	10	50
RJ-PG16-12B	Φ 12	PG16	10	50
RJ-PG16-15B	Φ 15	PG16	13	50
RJ-PG21-20B	Φ 20	PG21	13	50
RJ-PG29-25B	Φ 25	PG29	13	20

NGD防爆挠性连接管

Explosion proof flexible pipe



产品特点:

- 防爆挠性管由活接头与连接管组成，连接管由内管和外护套组成
- 活接头由不锈钢或者碳钢电镀处理制成
- 内管由波纹管或金属软管制成，具有良好的耐腐蚀性
- 具有阻燃、耐腐蚀、耐水、耐老化、挠性良好、结构牢固、工作可靠等特点
- 可定制螺纹，可定制长度，常规供货有500mm、700mm、1000mm，三种材质可选

技术参数:


- 执行标准: GB3836.1,GB 3836.2,GB 12476.1,GB12476.5,IEC61241-0,IEC61241-1
- 防爆标志: Ex dIIC Gb/Ex eII C Gb/Ex tD A21 IP66
- 防护等级: IP65

型号含义:

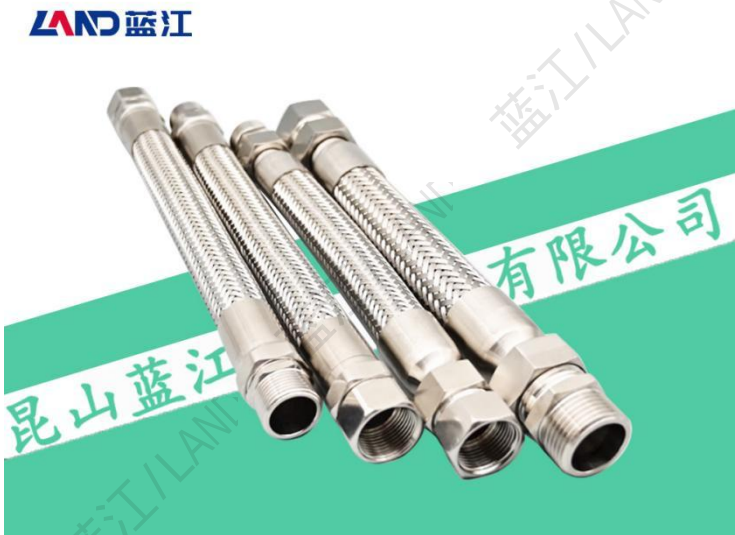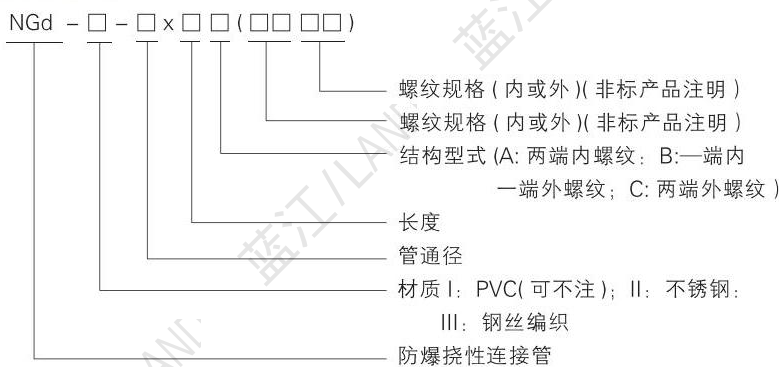

产品尺寸表

规格型号	接头螺纹			管通径			长度L(mm)	最小弯曲半径
	M	NPT	G	I型	II型	III型	单根长度	
NGD-□-DN15-500□	M20×1.5	1/2"	1/2"	13	14	14	500	80
NGD-□-DN15-700□	M20×1.5	1/2"	1/2"	13	14	14	700	80
NGD-□-DN15-1000□	M20×1.5	1/2"	1/2"	13	14	14	1000	80
NGD-□-DN20-500□	M25×1.5	3/4"	3/4"	19	17	17	500	110
NGD-□-DN20-700□	M25×1.5	3/4"	3/4"	19	17	17	700	110
NGD-□-DN20-1000□	M25×1.5	3/4"	3/4"	19	17	17	1000	110
NGD-□-DN25-500□	M32×1.5	1"	1"	23	23	23	500	145
NGD-□-DN25-700□	M32×1.5	1"	1"	23	23	23	700	145
NGD-□-DN25-1000□	M32×1.5	1"	1"	23	23	23	1000	145
NGD-□-DN32-500□	M40×1.5	1 1/4"	1 1/4"	28	30	30	500	180
NGD-□-DN32-700□	M40×1.5	1 1/4"	1 1/4"	28	30	30	700	180
NGD-□-DN32-1000□	M40×1.5	1 1/4"	1 1/4"	28	30	30	1000	180
NGD-□-DN40-500□	M50×1.5	1 1/2"	1 1/2"	32	35	35	500	210
NGD-□-DN40-700□	M50×1.5	1 1/2"	1 1/2"	32	35	35	700	210
NGD-□-DN40-1000□	M50×1.5	1 1/2"	1 1/2"	32	35	35	1000	210
NGD-□-DN50-500□	M63×1.5	2"	2"	40	47	47	500	250
NGD-□-DN50-700□	M63×1.5	2"	2"	40	47	47	700	250
NGD-□-DN50-1000□	M63×1.5	2"	2"	40	47	47	1000	250
NGD-□-DN65-700□	M75×1.5	2 1/2"	2 1/2"	-	59	59	700	350
NGD-□-DN65-1000□	M75×1.5	2 1/2"	2 1/2"	-	59	59	1000	350
NGD-□-DN80-700□	M90×2	3"	3"	-	72	72	700	400
NGD-□-DN80-1000□	M90×2	3"	3"	-	72	72	1000	400
NGD-□-DN100-700□	M115×2	4"	4"	-	97	97	700	500
NGD-□-DN100-1000□	M115×2	4"	4"	-	97	97	1000	500

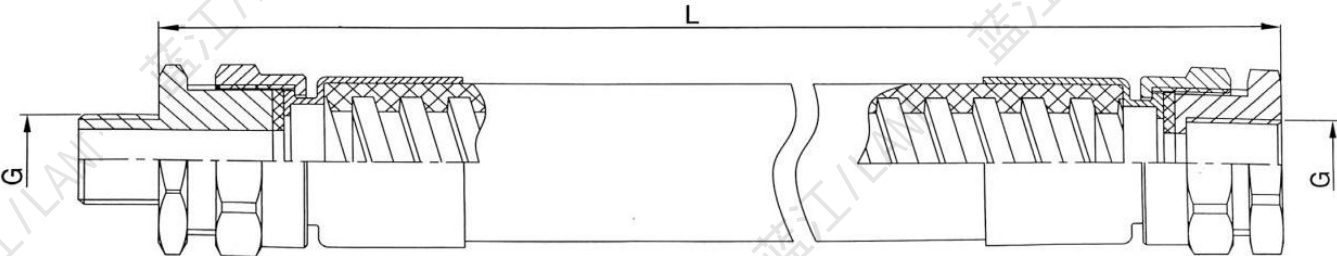

订货须知

- 若需订购防爆挠性连接管，材质为 PVC、管通径为 15mm、长度为 500mm，一端内螺纹一端外螺纹、螺纹规格为 G1/2"，则订货型号为 "NGd-15 x 500B" ；
- 若需订购防爆挠性连接管，材质为 不锈钢、管通径为 20mm、长度为 700mm，结构型式为一端内一端外螺纹，内螺纹规格为 G3/4" 外螺纹规格为 M25x1.5, 则订货型号为 "NGd-II-20 x 700B(G3/4 内 M25x1.5 外)" 。